

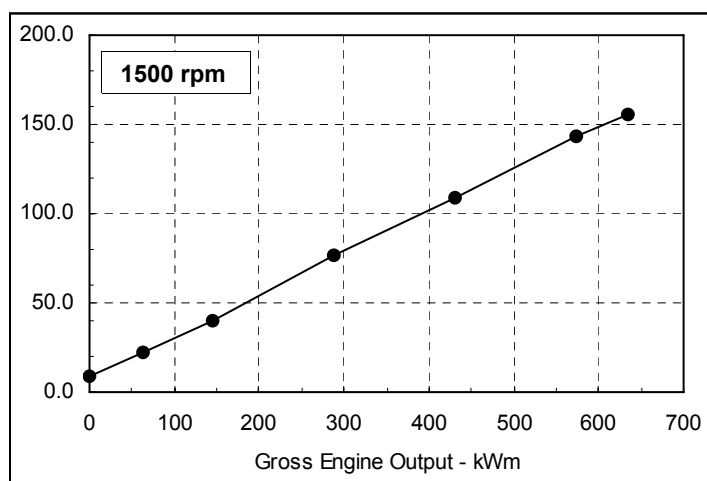
	Cummins Inc. Columbus, Indiana 47202-3005		Basic Engine Model: QSK19-G3 NR2	Curve Number: FR-4446	<i>G-DRIVE</i> QSK 1
	Engine Data Sheet		Engine Critical Parts List: CPL:1485	Date: 5Oct07	
Displacement : 19.0 L (1159 in.³)			Bore : 159 mm (6.25 in.) Stroke : 159 mm (6.25 in.)		
No. of Cylinders : 6			Aspiration : Turbocharged and Air to Air Aftercooled		
Emissions : Refer to Emission Data Sheet for Details.					

Engine Speed	Standby Power		Prime Power		Continuous Power	
	kWm	hp	kWm	hp	kWm	hp
1500	634	850	574	770	336	450
1800	669	897	608	815	500	670

Engine Performance Data @ 1500 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm·h	lb/ hp·h	litre/ hour	US gal/ hour
STANDBY POWER						
100	634	850	0.209	0.344	156	41.2
PRIME POWER						
100	574	770	0.212	0.349	143	37.8
75	431	578	0.215	0.353	109	28.7
50	287	385	0.228	0.375	77	20.3
25	144	193	0.238	0.392	40	10.6
CONTINUOUS POWER						
100	336	450	0.223	0.367	88	23.2

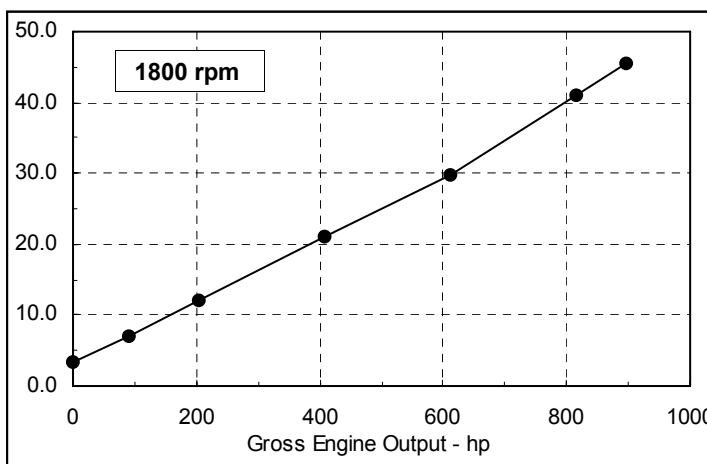
litre/hour



Engine Performance Data @ 1800 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm·h	lb/ hp·h	litre/ hour	US gal/ hour
STANDBY POWER						
100	669	897	0.218	0.359	172	45.4
PRIME POWER						
100	608	815	0.217	0.357	155	41.0
75	456	611	0.211	0.346	113	29.8
50	304	408	0.225	0.370	80	21.2
25	152	204	0.259	0.426	46	12.2
CONTINUOUS POWER						
100	500	670	0.212	0.348	125	32.9

US gallons/hour



CONVERSIONS: (litres = US Gal x 3.785) (US Gal = litres x 0.2642)

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. **STANDBY POWER RATING:** Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. **PRIME POWER RATING:** Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: **UNLIMITED TIME RUNNING PRIME POWER:** Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. **LIMITED TIME RUNNING PRIME POWER:** Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. **CONTINUOUS POWER RATING:** Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

Data Subject to Change Without Notice

Reference AEB 10.47 for determining Electrical Output.

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2.

Derates shown are based on 10/15 in H₂O air intake restriction @ 1500/1800 rpm and 2 in Hg exhaust back pressure.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lbs/US gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

Data Status: **Limited Production**

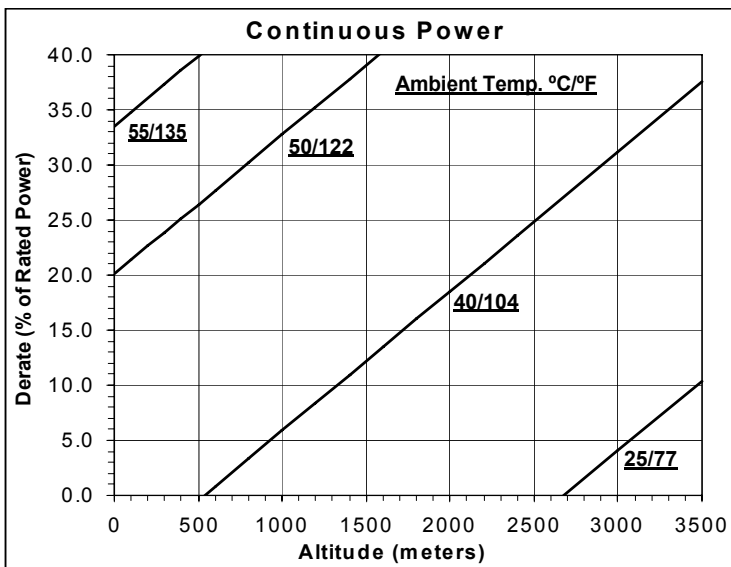
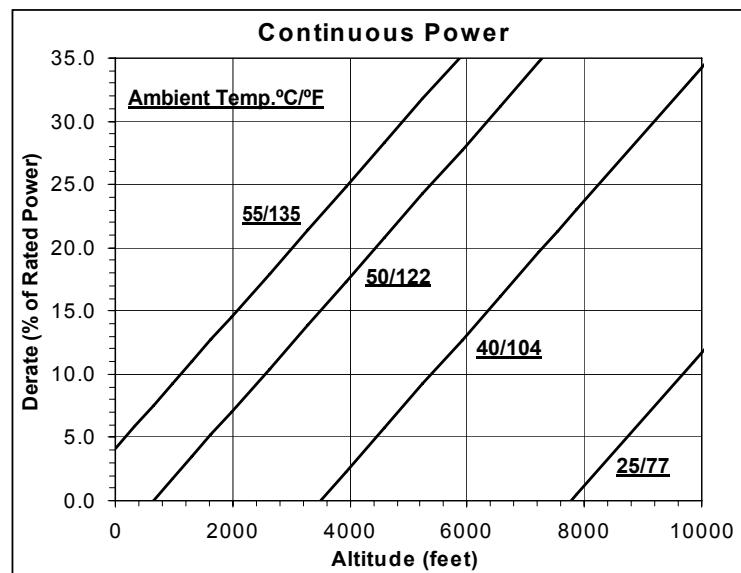
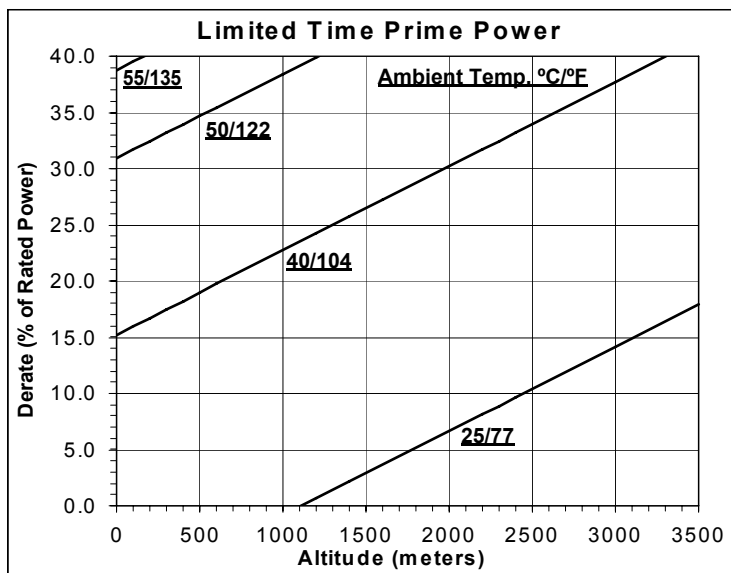
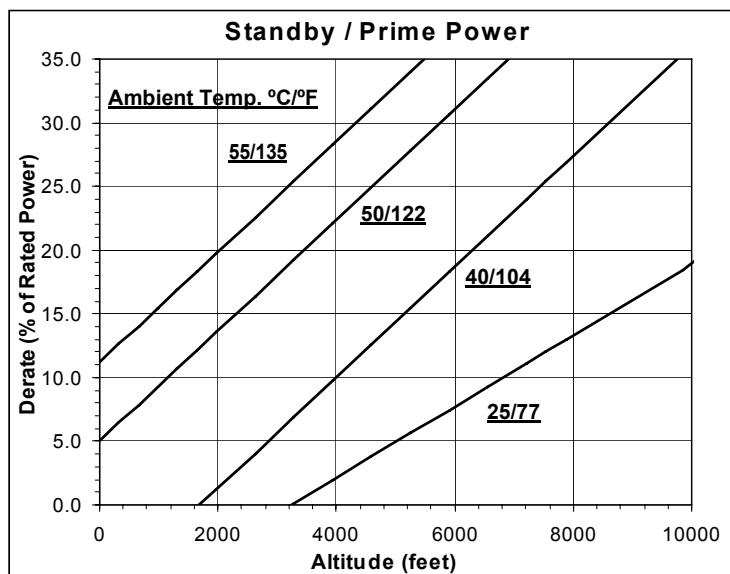
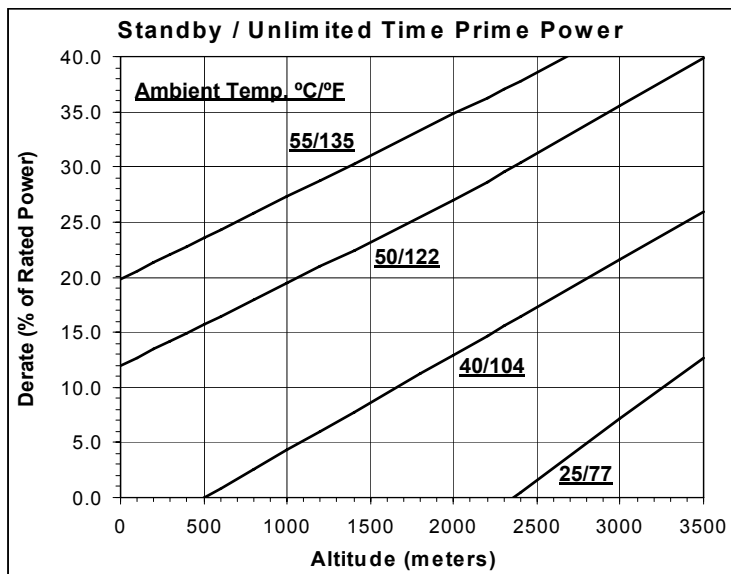
Data Tolerance: ± 5%

Chief Engineer:

C. J. Martin

1500 rpm Derate Curves

1800 rpm Derate Curves

**Operation at Elevated Temperature and Altitude:**

For **Standby/Unlimited Time Prime Power** Operation above these conditions, derate by an additional 3.3% per 300 m (1000 ft), and 16% per 10 °C (18 °F).

For **Limited Time Prime Power** Operation above these conditions, derate by an additional 2.3% per 300 m (1000 ft), and 16% per 10 °C (18 °F).

For **Continuous** Operation above these conditions, derate by an additional 3.8% per 300 m (1000 ft), and 27% per 10 °C (18 °F).

Operation at Elevated Temperature and Altitude:

For **Standby/Prime** Operation above these conditions, derate by an additional 4.3% per 300 m (1000 ft), and 12.4% per 10 °C (18 °F).

For **Continuous** Operation above these conditions, derate by an additional 5.2% per 300 m (1000 ft), and 15% per 10 °C (18 °F).

Cummins Inc.

Engine Data Sheet

ENGINE MODEL : QSK19-G3 NR2

CONFIGURATION NUMBER : D193103GX03

DATA SHEET : DS-4446

DATE : 5Oct07

PERFORMANCE CURVE : FR-4446

INSTALLATION DIAGRAM

• Fan to Flywheel: 4953720

CPL NUMBER

• Engine Critical Parts List: 1485

GENERAL ENGINE DATA

Type.....	4-Cycle; In-line; 6-Cylinder Diesel	
Aspiration.....	Turbocharged and Air to Air Aftercooled	
Bore x Stroke..... — in. x in. (mm x mm)	6.25 x 6.25 (159 x 159)	
Displacement..... — in. ³ (litre)	1159 (19.0)	
Compression Ratio	15.0:1	
Dry Weight (approximate)		
Fan to Flywheel Engine..... — lb (kg)	4190	(1900)
Wet Weight (approximate)		
Fan to Flywheel Engine..... — lb (kg)	4350	(1973)
Moment of Inertia of Rotating Components		
• with FW 4023 Flywheel..... — lb _m • ft ² (kg • m ²)	194.6	(8.2)
Center of Gravity from Rear Face of Block..... — in (mm)	23.55	(598.2)
Center of Gravity Above Crankshaft Centerline..... — in (mm)	11.1	(281.9)
Maximum Static Loading at Rear Main Bearing..... — lb (kg)	2000	(908)

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block..... — lb • ft (N • m)	1000	(1356)
---	------	--------

EXHAUST SYSTEM

Maximum Back Pressure - 1500/1800 rpm..... — in Hg (kPa)	2.3/3	(7.8/10.2)
--	-------	------------

AIR INDUCTION SYSTEM

Maximum Intake Air Restriction		
• with Dirty Filter Element..... — in H ₂ O (mm H ₂ O)	25	(635)
• with Clean Filter Element..... — in H ₂ O (mm H ₂ O)	15	(381)

COOLING SYSTEM**Jacket Water Circuit Requirements**

Coolant Capacity — Engine Only..... — US gal (litre)	11	(41.6)
Maximum Static Head of Coolant Above Engine Crank Centerline..... — ft (m)	60	(18.3)
Standard Thermostat (Modulating) Range..... — °F (°C)	181 - 203	(83 - 95)
Minimum Pressure Cap..... — psi (kPa)	15	(103)
Maximum Top Tank Temperature for Standby / Prime Power..... — °F (°C)	220/212	(104/100)
Maximum Coolant Friction Head External to Engine..... — psi (kPa)	5	(35)

Charge Air Cooler Requirements

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold - 1500/1800 rpm..... — °F (°C)	38/53	(21/29)
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold - 1500/1800 rpm..... — in Hg (kPa)	3/4	(10.2/13.5)
Maximum Intake Manifold Temperature @ 77 °F (25 °C) Ambient - 1500/1800 rpm..... — °F (°C)	115/130	(46/54)
Maximum Intake Manifold Temperature for Engine Protection (Warning Threshold)..... — °F (°C)	180	(82)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed..... — psi (kPa)	20	(138)
@ Governed Speed..... — psi (kPa)	40 - 60	(276 - 414)
Maximum Oil Temperature..... — °F (°C)	250	(121)
Oil Capacity with OP 4084 Oil Pan : High - Low..... — US gal (litre)	19 - 17	(72 - 64)
Total System Capacity (Including Combo Filter)..... — US gal (litre)	22.3	(84.4)

FUEL SYSTEM

Type Injection System	Cummins MCRS
Maximum Restriction at Lift Pump (clean/dirty filter)	5/9 (127/228)
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)	10 (254)
Maximum Fuel Flow to Injector Pump	102 (386)
Maximum Return Fuel Flow	66 (250)
Maximum Fuel Inlet Temperature	160 (71)

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement)	— volt	24
Battery Charging System, Negative Ground	— ampere	35
Maximum Allowable Resistance of Cranking Circuit	— ohm	0.002
Minimum Recommended Battery Capacity		
• Cold Soak @ 50 °F (10 °C) and Above	— 0°F CCA	600
• Cold Soak @ 32 °F to 50 °F (0 °C to 10 °C)	— 0°F CCA	640
• Cold Soak @ 0 °F to 32 °F (-18 °C to 0 °C)	— 0°F CCA	900

COLD START CAPABILITY

Minimum Ambient Temperature for Aided (with Coolant Heater) Cold Start within 10 seconds	— °F (°C)	(TBD)
Minimum Ambient Temperature for Unaided Cold Start	— °F (°C)	10 (-12)

PERFORMANCE DATA

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
 - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
 - ISO 3046, Part 1, Standard Reference Conditions of:

Barometric Pressure	: 100 kPa (29.53 in Hg)	Air Temperature	: 25 °C (77 °F)
Altitude	: 110 m (361 ft)	Relative Humidity	: 30%

Steady State Stability Band at Any Constant Load — % +/- 0.25

Estimated Free Field Sound Pressure Level of a Typical Generator Set:

Excludes Exhaust Noise; at Rated Load and 7 m (23 ft); 1800 RPM/1500 RPM	— dBA	93.3/90.2
Exhaust Noise at 1 m Horizontally from Centerline of Exhaust Pipe Outlet Upwards at 45°; 1800 RPM/1500 RPM	— dBA	118.9/118

Governed Engine Speed	RPM
Engine Idle Speed	RPM
Gross Engine Power Output	hp (kW _m)
Brake Mean Effective Pressure	psi (kPa)
Piston Speed	ft/min (m/s)
Friction Horsepower	hp (kW _m)
Engine Water Flow at Stated Friction Head External to Engine:	
• 3.0 psi Friction Head	US gpm (litre/s)
• Maximum Friction Head	US gpm (litre/s)

STANDBY		PRIME POWER	
60 hz	50 hz	60 hz	50 hz
1800	1500	1800	1500
700 - 900	700 - 900	700 - 900	700 - 900
897 (669)	850 (634)	815 (608)	770 (574)
343 (2365)	389 (2682)	312 (2150)	353 (2434)
1875 (9.5)	1562 (7.9)	1875 (9.5)	1562 (7.9)
79 (59)	57 (43)	79 (59)	57 (43)
196 (12.4)	162 (10.2)	196 (12.4)	162 (10.2)
175 (11.0)	145 (9.1)	175 (11.0)	145 (9.1)
2065 (975)	1720 (810)	1970 (930)	1635 (775)
905 (485)	960 (515)	855 (460)	945 (505)
5005 (2365)	4425 (2090)	4645 (2195)	4185 (1975)
27.3 : 1	24.6 : 1	28.9 : 1	25.5 : 1
3940 (70)	3515 (65)	3555 (65)	3285 (60)
14110 (250)	12830 (230)	12710 (225)	12225 (215)
30790 (545)	26095 (460)	27585 (485)	25365 (450)
330 (6)	300 (5)	330 (6)	300 (5)
11450 (205)	9355 (165)	10380 (185)	8490 (150)
147 (67)	120 (55)	140 (64)	114 (52)
96 (325)	88 (298)	89 (301)	82 (278)
457 (236)	446 (230)	434 (223)	426 (219)

Engine Data

Intake Air Flow	cfm (litre/s)
Exhaust Gas Temperature	°F (°C)
Exhaust Gas Flow	cfm (litre/s)
Air to Fuel Ratio	air : fuel
Radiated Heat to Ambient	BTU/min (kW _m)
Heat Rejection to Jacket Coolant	BTU/min (kW _m)
Heat Rejection to Exhaust	BTU/min (kW _m)
Heat Rejected to Fuel	BTU/min (kW _m)
Heat Rejected to Aftercooler	BTU/min (kW _m)
Charge Air Flow	lb/min (kg/min)
Turbocharger Compressor Outlet Pressure	in Hg (kPa)
Maximum Expected Compressor Outlet Temperature	°F (°C)

N.A. - Not Available

N/A - Not Applicable to this Engine

TBD - To Be Determined

ENGINE MODEL : QSK19-G3 NR2

DATA SHEET : DS-4446

DATE : 5Oct07

Cummins Inc. : Columbus, Indiana

CURVE NO. : FR-4446