

WESTLUND SHRINK BAND APPLICATORS


Model 601 and 602

Available in single (601) and dual (602) stations for line speeds of up to 70 and 140 applications per minute respectively. These models offer high reliability over a wide product range.

These models are designed to fit in-line over your present conveyor system with portability to allow multiple line use.

Modular construction permits fast changes-over enabling several products to be banded on a single machine.

- Heavy duty stainless steel construction
- Handles registered, clear or random printed bands
- Handles material thickness of .001 to .04 or more
- Mechanical film feed (electric for registered film)
- Dual timing screws for positioning
- Machines operation - cam controlled for reliability
- Overload drive clutch and cam shaft to prevent machine damage
- Adjustable height for various product sizes
- Monitors line conditions to prevent jamming
- Reliability at low cost
- Higher speed models available

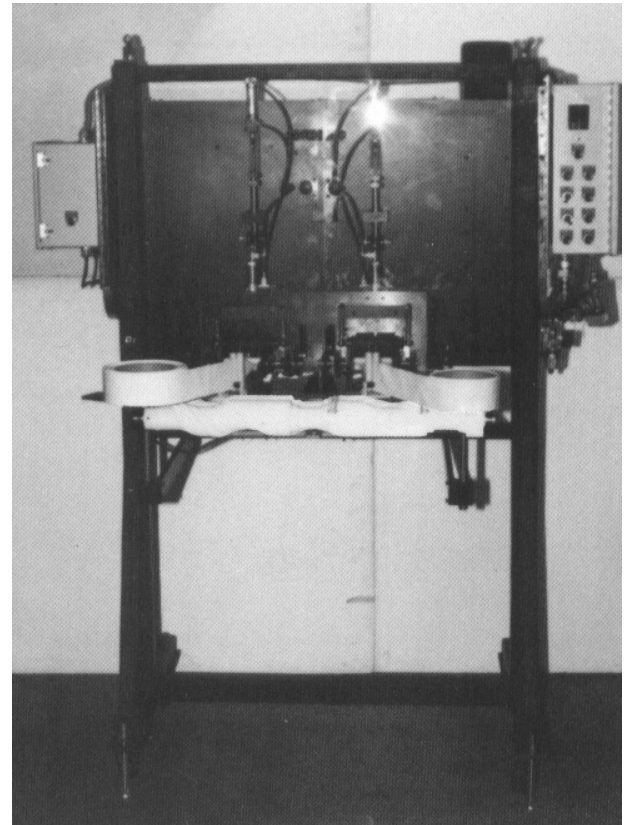

Guards removed for clarity

Model 602

All Westlund equipment is designed and engineered to provide our customers with optimum performance at an economical price. Our experience in the designing and building of shrink band applying machinery has enabled the development of modular construction techniques which greatly simplify operation and speed up change-over while lowering maintenance costs.

At your request, a company representative will analyze your application and recommend the proper equipment

WESTLUND

ENGINEERING INC.

12400 44TH STREET NORTH, CLEARWATER, FL 33762 P 727.572.4343 F 727.572.6811
WEBSITE: WWW.WESTLUNDENG.COM EMAIL: WESTLUND@WESTLUNDENG.COM