




Little David delivers
packaging equipment
that works for you



Chain and lug provides
positive drive

Case Former

CF-40T

Case Forming for the Real World

This reliable case former for industrial environments forms a wide range of cases.



The CF-40T offers:

- ☑ Calibrated scales
- ☑ Powered hopper
- ☑ Pneumatic tuckers
- ☑ Allen Bradley PLC
- ☑ Quick changeover
- ☑ Heavy duty steel construction
- ☑ Safety guarding
- ☑ Built in the USA

The CF-40T replaces:

- ☑ Expensive labor
- ☑ Hand taping boxes
- ☑ Unsafe machinery



www.loveshaw.com


Little David CF-40T



CF-40T

Dimensions:

CF-40T

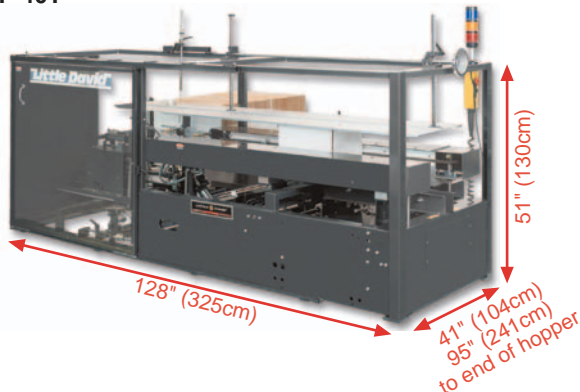

Additional Case Former Models:

Also Available: CF-20T

- 6 cases/min
- Case Dimensions:
 - Length: 6" - 16" (152mm - 406mm)
 - Width: 6" - 12" (152mm - 305mm)
 - Height: 4" - 12" (102mm - 305mm)



Also Available: CF-30T

- 10 cases/min
- Case Dimensions:
 - Length: 8" - 18" (203mm - 457mm)
 - Width: 8" - 15" (203mm - 381mm)
 - Height: 6" - 15" (152mm - 381mm)



Options of the CF-40T:

- Spare parts kit
- Special electrics
- Custom color
- Box jam warning
- Low tape warning
- Low hopper warning
- Casters
- Guarding package
- Stainless steel
- Automatic central lube
- Available in CE, NEMA 4
- Extended capacity powered hopper

Specifications of the CF-40T:

Power Requirements:

- 110 VAC, 60Hz, single phase, 10 Amps
- Note: Other voltages available. Contact Loveshaw for details.

Air Requirements:

- 13 SCFM @ 80 psi

Tape Specifications:

- Any commercially acceptable brand of pressure sensitive tape.
- Width: 1-1/2" (38mm) to 2" (51mm); 3" (76mm) optional
- Tape Roll Diameter: 15" (381mm) maximum on a 3" (76mm) core
- Roll Length: up to 2000 yards (1829m)

Production Rate:

- CF-40T:** Up to 20 cases per minute, depending on case size and corrugated quality
- CF-40TXL:** Up to 10 cases per minute, depending on case size and corrugated quality
- CF-40TXXL:** Up to 10 cases per minute, depending on case size and corrugated quality

Corrugated Orientation:

- Printing on case and fold orientation must match footprint of machine.

Case Dimensions:

| | CF-40T | CF-40TXL | CF-40TXXL |
|---------|-----------------------------|-----------------------------|------------------------------|
| Length: | 7" - 24" (178mm - 610mm) | 7" - 28" (178mm - 711mm) | 17" - 33" (432mm - 838mm) |
| Width: | 6" - 16" (152mm - 406mm) | 6" - 22" (152mm - 559mm) | 13" - 27" (330mm - 686mm) |
| Height: | 4" - 16" (102mm - 406mm) | 4" - 24" (102mm - 610mm) | 7" - 24" (178mm - 610mm) |

Note: Certain length x width x height combinations may require an optional high lub drive due to unstable conveying conditions.

Weight:

- 1750 lbs (795kg) uncrated

Distributor Information:

LOVESHAW
an ITW Company

Route 296, Box 83
South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
(800) 572-3434

LOVESHAW Europe
A Division of ITW Ltd.

Unit 9 Brunel Gate,
West Portway Industrial
Andover, Hampshire England SP 10 3
Tel: (1264) 357511 Fax: (1264) 355964

