


RUGGED DESIGN SIMPLICITY

STANDARD FEATURES


- Positive Shrinking of all products assured with 4-directional air flow (2 sides, top and bottom).
- Bases supplied with locking casters and leveling adjusters.
- Variable Speed Conveyor has rollers on 1-1/2" centers.
- Stainless Steel Mesh Conveyor, or "Live" Rollers; optional "dead" rollers on request.
- Sealed Bearings - not bushings - on drive and idler shafts.
- Conveyor belt speed 67 feet per minute ET20, ET24, ET36, ET48, ET56 & ET70 live roller
- Conveyor belt speed 100 feet per minute ET20, ET24, ET36, ET48, ET56 & ET70 mesh belt
- Variable Air Flow.
- 440 or 480 Volt Available.
- Chain Drive powered by an Industrial Gear Motor.
- Solid State Temperature Controller.
- Removable Air Return Screen.
- Quiet, Safe Conveyor Operation.
- 3 Heater Banks: 14, 16, 18 KW to match chamber openings for MODELS ET20, ET24, ET36, ET56 & ET70.
- Tube, High Speed, & Bundling Tunnels - see separate brochure.
- Over temperature protection.
- Delayed cool down.

LIVE ROLLER CONVEYOR

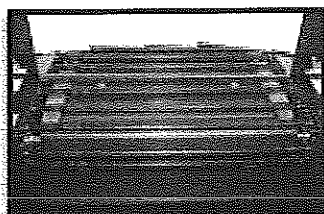

NO EXTRA CHARGE IF ORDERED AS ORIGINAL EQUIPMENT

FOLD-DOWN CONTROL PANEL FOR EASE IN SERVICING

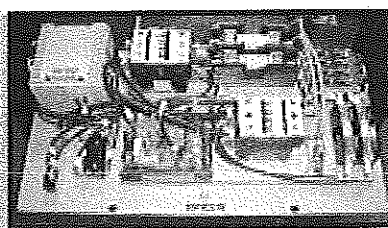

WEIGHT, POWER REQUIREMENTS, DIMENSIONS


EASTEY SHRINK TUNNEL MODELS	MACHINE DIMENSIONS (in)				MACHINE DIMENSIONS (cm)				STANDARD POWER			WEIGHT		CRATED SHP WGT	
	W	x	H	x L	W	x	H	x L	VOLTS	AMPS	PHASE	(lbs)	(kg)	(lbs)	(kg)
ET20	33	x	56-72	x 74	83.82	x	142.40-182.88	x 187.96	220	50	3	900	410	1200	546
ET24	37	x	56-72	x 74	93.98	x	142.40-182.88	x 187.96	220	50	3	1000	455	1250	569
ET36	49	x	56-72	x 74	124.46	x	142.40-182.88	x 187.96	220	50-60	3	1300	591	1600	728
ET48	61	x	56-72	x 74	154.94	x	142.40-182.88	x 187.96	220	80-90-100	3	1700	773	2000	910
ET56	69	x	56-72	x 74	175.26	x	142.40-182.88	x 187.96	220	90-100	3	2000	910	2300	1047
ET70	83	x	56-72	x 74	210.82	x	142.40-182.88	x 187.96	220	100	3	2500	1138	2800	1274

TUNNEL CHAMBER, ROLLER AND CONVEYOR DIMENSIONS

MODELS	CHAMBER DIMENSIONS (in)				CHAMBER DIMENSIONS (cm)				ROLLER WIDTH		CONVEYOR LENGTH	
	W	x	H	x L	W	x	H	x L	(in)	(cm)	(in)	(cm)
ET20	20	x	4-20	x 52	50.80	x	10.16-50.80	x 132.08	20	50.80	72	182.88
ET24	24	x	4-20	x 52	60.96	x	10.16-50.80	x 132.08	24	60.96	72	182.88
ET36	36	x	4-20	x 52	91.44	x	10.16-50.80	x 132.08	36	91.44	72	182.88
ET48	48	x	4-20	x 52	121.92	x	10.16-50.80	x 132.08	48	121.92	72	182.88
ET56	56	x	4-20	x 52	142.24	x	10.16-50.80	x 132.08	56	142.24	72	182.88
ET70	70	x	4-20	x 52	177.80	x	10.16-50.80	x 132.08	70	177.80	72	182.88

DEALER IMPRINT

PRODUCTION WIZARD EASTEY COMBO UNIT



MODEL EM16TT

MT SERIES AND TT SERIES. Sealer and Tunnel on a common frame; quick set-up, matching Sealer and Tunnel for perfect alignment and product transfer. Two series - 2 Models each seal size, 16" x 20" 28" x 20".

(Rev. 2/09)

BUILT RIGHT - PRICED RIGHT

41177279