


Exclusively from your Caterpillar® dealer

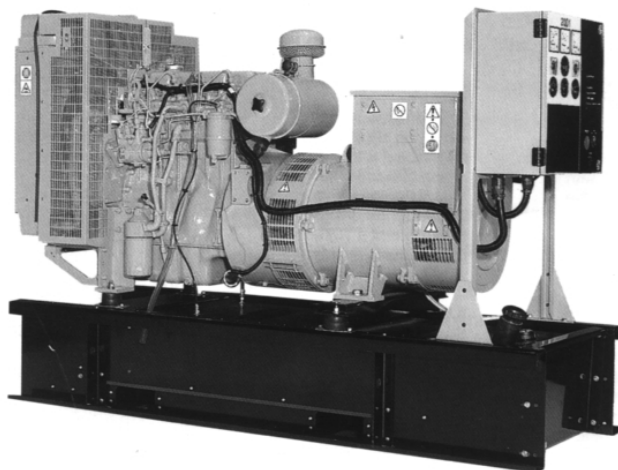

STANDBY 40-60 kW
PRIME 36-54.5 kW
60 Hz

Model	Standby kW (kVA)	Prime kW (kVA)
D40P3	40 (50)	36 (45)
D40P2*	40 (50)	36 (45)
D50P3	50 (62.5)	45 (56.3)
D50P2*	50 (62.5)	45 (56.3)
D60P3	60 (75)	54.5 (68.1)
D60P2*	60 (75)	54.5 (68.1)

*EPA Approved, Emissions Certified

FEATURES

GENERATOR SET

- Complete system designed and built at ISO 9001 certified facilities
- Factory tested to design specifications at full load conditions

ENGINE

- Governor, mechanical
- Electrical system, 12 VDC
- Cartridge type filters
- Battery(s), rack and cables
- Coolant and lube drains piped to edge of base

GENERATOR

- Insulation system, class H
- Drip proof alternator air intake (NEMA 2, IP23)
- Electrical design in accordance with BS5000 Part 99, IEC34-1, VDE0530, UTE51100, NEMA MG-1.22

CONTROL SYSTEM

- 2001 Series Autostart control panel
- Vibration isolated NEMA 1 enclosure with lockable hinged door
- DC and AC wiring looms

MOUNTING ARRANGEMENT

- Heavy-duty fabricated steel base with lifting points
- Anti-vibration pads to ensure vibration isolation
- Complete OSHA guarding
- Stub-up pipe ready for connection to silencer pipework
- Flexible fuel lines terminated at skid base with NPT connections

COOLING SYSTEM

- Radiator and cooling fan complete with protective guards
- Standard ambient temperatures up to 122° F (50° C)

CIRCUIT BREAKER

- UL/CSA listed
- 3-pole with solid neutral
- NEMA 1 steel enclosure, vibration isolated
- Electrical stub-up area directly below circuit breaker

AUTOMATIC VOLTAGE REGULATOR

- Voltage within $\pm 0.5\%$ at steady state from no load to full load
- Provides fast recovery from transient load changes

EQUIPMENT FINISH

- All electroplated hardware
- Anticorrosive paint protection
- High gloss polyurethane paint for durability and scuff resistance

QUALITY STANDARDS

- BS4999, BS5000, BS5514, IEC34, VDE0530, NEMA MG-1.22, NFPA 110 (with optional equipment)

DOCUMENTATION

- Operation and maintenance manuals provided
- Wiring diagrams included

WARRANTY

- 12 months from date of initial start-up or 18 months from shipping, whichever occurs first

Materials and specifications are subject to change without notice.

STANDBY 40 - 60 kW
PRIME 36 - 54.5 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

OPTIONAL EQUIPMENT*

ENCLOSURE

- B Series weather protective enclosure (includes internal silencer system and 8-hour single-walled fuel tank)
 - Single point lift
 - Panel viewing window
 - External emergency stop pushbutton
- Sound attenuated enclosure (includes internal silencer system)
- Super sound attenuated enclosure (includes internal silencer system)

SILENCER SYSTEM — OPEN UNIT

- Level 1 “residential”
- Level 2 “critical”
- Level 3 “super critical”
- Mounting kit
- Through-wall installation kits

ENGINE

- Electronic governor (fully adjustable)
- Battery heater
- Lube oil drain pump
- High lube oil temperature shutdown
- Lube oil sump heater

GENERATOR

- Anti-condensation heater
- Permanent magnet generator
- AREP excitation system
- Alternator upgrade 1 size

CONTROL SYSTEM

- No control system
- 4001 Autostart control panel
- 4001E Autostart control panel
- Access 4000 digital control panel

MOUNTING ACCESSORIES

- Seismic (Zone 4) vibration isolators

FUEL SYSTEM

- Single-walled plastic fuel tank
- UL listed closed top-diked skid-mounted fuel tank base (12/24-hour capacity) with fuel alarm (low level/ leak detected)
- Critical high fuel alarm
- Skidbase in lieu of tankbase on enclosed sets
- Manual fuel pump

REMOTE ANNUNCIATORS

- 8- and 16-channel remote annunciator panel (supplied loose)
- Remote annunciator upgrade normal/run control switch
- Remote annunciator upgrade lockdown emergency stop button

COOLING SYSTEM

- Coolant heater
- Low coolant temperature alarm
- Low coolant level shutdown
- Radiator transition flange

MISCELLANEOUS ACCESSORIES

- Toolkit
- Additional operator’s manual pack
- Special enclosure color
- CSA certification
- French language labels

EXTENDED WARRANTY


- 24 months
 - 36 months
 - 48 months
 - 60 months
- (See warranty policy for details of coverage)

TESTING

- Factory witness test (restricted to 6 hours — full load, 1.0 pf)

*Some options may not be available on all models.
 Not all options are listed.

GENERATOR SET DIMENSIONS AND WEIGHTS

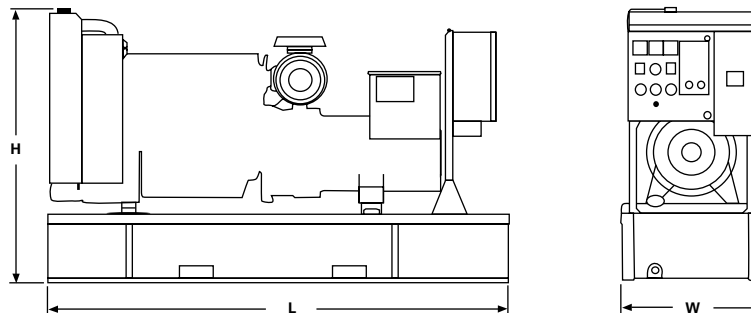

Model	Length in (mm)	Width in (mm)	Height in (mm)	Weight lbs (kg)**
D40P3	84.6 (2149)	29.6 (752)	54.8 (1392)	1804 (820)
D40P2	84.6 (2149)	29.6 (752)	54.8 (1392)	1804 (820)
D50P3	84.6 (2149)	29.6 (752)	54.8 (1392)	1881 (855)
D50P2	84.6 (2149)	29.6 (752)	54.8 (1392)	1881 (855)
D60P3	84.6 (2149)	29.6 (752)	54.8 (1392)	1991 (905)
D60P2	84.6 (2149)	29.6 (752)	54.8 (1392)	1991 (905)

NOTE: General configuration not to be used for installation. See specific dimensional drawings for detail.

**Includes oil and coolant

STANDBY **40 - 60** **kW**
PRIME **36 - 54.5** **kW**
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

SPECIFICATIONS



GENERATOR

Voltage Regulation $\pm 0.5\%$ at steady state from
no load to full load
Frequency $\pm 0.8\%$ for constant load,
no load to full load
Waveform Distortion THD $< 1.8\%$, at no load
Radio Interference Compliance with BS800 and
VDE Class G&N
Telephone Interference TIF < 50 , THF $< 2\%$
Overspeed Limit 2250 rpm
Insulation Class H
Temperature Rise Within Class H limits
Available Voltages 277/480, 266/460, 120/240,
127/220, 120/208, 347/600
Deration Consult factory for available outputs
Ratings At 86° F (30° C), 500 ft. (152.4 m),
60% humidity, 0.8 pf



ENGINE

Manufacturer Perkins
Type 4-Cycle
Cylinder Configuration In-line 4
Displacement — cu in (L) 243.5 (3.99)
Stroke — in (mm) 5.00 (127.0)
Governor
Type Mechanical
Class A1
Piston Speed — ft/sec (m/sec) 25.0 (7.62)
Engine speed — rpm 1800
Air Cleaner Type Dry, replaceable paper
element type with restriction indicator

D40P3 — 1004G

Aspiration Natural
Bore — in (mm) 3.94 (100)
Compression Ratio 16.0:1
Max Power at Rated rpm — hp (kW)
Standby 72.8 (54.3)
Prime 66.1 (49.3)
BMEP — psi (kPa)
Standby 135.7 (936)
Prime 122.1 (842)
Regenerative Power — kW 10.5

D40P2 — 1004GEPA

Aspiration Natural
Bore — in (mm) 3.94 (100)
Compression Ratio 16.0:1
Max Power at Rated rpm — hp (kW)
Standby 75.1 (56)
Prime 67.6 (50.4)
BMEP — psi (kPa)
Standby 136 (936)
Prime 122 (842)
Regenerative Power — kW 12.6

D50P3, D60P3 — 1004TG2

Aspiration Turbocharged
Bore — in (mm) 3.94 (100)
Compression Ratio 16.0:1
Max Power at Rated rpm — hp (kW)
Standby 122.0 (91.0)
Prime 110.9 (82.7)
BMEP — psi (kPa)
Standby 210.7 (1453)
Prime 191.4 (1320)
Regenerative Power — kW 12.7

D50P2, D60P2 — 1004-40T

Aspiration Turbocharged
Bore — in (mm) 3.94 (100.0)
Compression Ratio 17.25:1
Max Power at Rated rpm — hp (kW)
Standby 95.2 (71.0)
Prime 86.5 (64.5)
BMEP — psi (kPa)
Standby 172 (1185)
Prime 156 (1076)
Regenerative Power — kW 12.6



CONTROL PANEL

NEMA 1 steel enclosure with lockable hinged door
Vibration isolated mounted Autostart control panel
Single location customer connector point
Electrical stub-up area directly below control panel

RATING DEFINITIONS

Standby — Applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The generator is peak rated (as defined in ISO8528-3).

Prime — Applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and the generator set can supply 10 percent overload power for 1 hour in 12 hours.

Consult your Olympian representative for more information.

www.CAT-ElectricPower.com

© 2000 Caterpillar
All rights reserved.
Printed in U.S.A.

STANDBY 40 kW
PRIME 36 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D40P3 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	40 (50)	36 (45)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.1 (8.1) 1.8 (6.9)	2.1 (8.1) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	3.78 (14.34) 2.83 (10.76) 1.89 (7.17)	3.43 (13.04) 2.58 (9.78) 1.72 (6.52)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	4.9 (18.6) 9.8 (3.0) 1791 (6780) 158 (70) 13.8 (7.7) 2219 (39.0) 961 (16.4) 5.5 (4.1)	4.9 (18.6) 9.8 (3.0) 1791 (6780) 158 (70) 13.8 (7.7) 1991 (35.0) 853 (15.0) 5.5 (4.1)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m ³ /min) in H ₂ O (kPa) cfm (m ³ /min) cfm (m ³ /min)	112 (3.2) 4.1 (1.0) 9216 (261) 678 (19.2)	110 (3.1) 4.1 (1.0) 9216 (261) 678 (19.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m ³ /min) °F (°C)	1.5 (5) 321 (9.1) 1130 (610)	1.5 (5) 306 (8.7) 986 (530)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	97	97

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)	Self Excited	100	100	92	76	84
	PM Excited**	110	110	100	82	92
	AREP Excited	TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby	89.1	89.1	89.0	88.8	89.0
	Prime	89.4	89.4	89.8	89.4	89.7
Reactances (per unit): Reactances shown are applicable to the standby rating.	X _d	2.63	2.63	2.87	3.51	3.13
	X' _d	0.111	0.111	0.122	0.156	0.133
	X'' _d	0.057	0.057	0.062	0.076	0.068
	X _q	1.58	1.58	1.72	2.11	1.88
	X'' _q	0.073	0.073	0.080	0.097	0.087
	X ₂	0.064	0.064	0.071	0.087	0.077
	X ₀	0.010	0.010	0.006	0.009	0.003
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 1.164 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only
 ** With PMG Excited Option AR12

STANDBY 40 kW
PRIME 36 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D40P2 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	40 (50)	36 (45)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.2 (8.5) 1.8 (6.9)	2.2 (8.5) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	3.57 (13.5) 2.38 (9.0) 1.6 (6.1)	3.04 (11.5) 2.04 (7.89) 1.76 (6.67)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	5.5 (21.0) 20.3 (6.2) 1537 (5820) 158 (70) 13.9 (7.7) 2275 (40.0) 1050 (18.5) 2.4 (1.8)	5.5 (21.0) 20.3 (6.2) 1537 (5820) 158 (70) 13.9 (7.7) 2040 (35.9) 950 (16.7) 2.4 (1.8)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m³/min) in H ₂ O (kPa) cfm (m³/min) cfm (m³/min)	111 (3.15) 8 (2) 5300 (150) 572 (16.2)	111 (3.15) 8 (2) 5300 (150) 572 (16.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m³/min) °F (°C)	1.5 (5.0) 343 (9.7) 1256 (690)	1.5 (5.0) 322 (9.1) 1112 (610)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	96	96

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)	Self Excited	100	100	92	76	84
	PM Excited**	110	110	100	82	92
	AREP Excited	TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby	89.1	89.1	89.0	88.8	89.0
	Prime	89.4	89.4	89.8	89.4	89.7
Reactances (per unit): Reactances shown are applicable to the standby rating.	X _d	2.63	2.63	2.87	3.51	3.13
	X' _d	0.111	0.111	0.122	0.156	0.133
	X'' _d	0.057	0.057	0.062	0.076	0.068
	X _q	1.58	1.58	1.72	2.11	1.88
	X'' _q	0.073	0.073	0.080	0.097	0.087
	X ₂	0.064	0.064	0.071	0.087	0.077
	X ₀	0.010	0.010	0.006	0.009	0.003
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 1.164 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only

** With PMG Excited Option AR12

STANDBY **50 kW**
PRIME **45 kW**
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D50P3 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	50 (62.5)	45 (56.3)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.2 (8.5) 1.8 (6.9)	2.2 (8.5) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	4.99 (18.96) 3.75 (14.22) 2.50 (9.48)	4.54 (17.23) 3.40 (12.92) 2.27 (8.62)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	5.2 (19.7) 9.7 (3.0) 1870 (7080) 158 (70) 13.8 (7.7) 2105 (37.0) 1257 (22.1) 6.0 (4.5)	5.2 (19.7) 9.7 (3.0) 1870 (7080) 158 (70) 13.8 (7.7) 1820 (32.0) 1194 (21) 6.0 (4.5)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m ³ /min) in H ₂ O (kPa) cfm (m ³ /min) cfm (m ³ /min)	197 (5.6) 12 (3.0) 9958 (282) 678 (19.2)	172 (4.9) 12 (3.0) 9958 (282) 678 (19.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m ³ /min) °F (°C)	1.8 (6) 516 (14.6) 896 (480)	1.8 (6) 491 (13.9) 849 (454)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	97	97

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)	Self Excited	119	119	108	90	100
	PM Excited**	130	130	120	98	110
	AREP Excited	TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby	89.0	89.0	89.0	88.8	89.0
	Prime	89.3	89.3	89.3	89.4	89.7
Reactances (per unit): Reactances shown are applicable to the standby rating.	X _d	2.85	2.85	3.10	3.79	3.39
	X' _d	0.113	0.113	0.125	0.163	0.138
	X'' _d	0.059	0.059	0.064	0.079	0.070
	X _q	1.71	1.71	1.86	2.28	2.04
	X'' _q	0.075	0.075	0.083	0.101	0.090
	X ₂	0.68	0.68	0.074	0.090	0.080
	X ₀	0.010	0.010	0.001	0.010	0.001
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 1.206 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only

** With PMG Excited Option AR12

STANDBY **50 kW**
PRIME **45 kW**
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D50P2 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	50 (62.5)	45 (56.3)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.2 (8.5) 1.8 (6.9)	2.2 (8.5) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	4.73 (17.90) 3.68 (13.94) 2.70 (10.23)	4.27 (16.17) 3.38 (12.8) 2.57 (9.7)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	5.9 (22.2) 14.1 (4.3) 2932 (11 100) 158 (70) 13.9 (7.7) 2645 (46.5) 1428 (25.1) 5.1 (3.8)	5.9 (22.2) 14.1 (4.3) 2932 (11 100) 158 (70) 13.9 (7.7) 2400 (42.2) 1308 (23.0) 5.1 (3.8)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m ³ /min) in H ₂ O (kPa) cfm (m ³ /min) cfm (m ³ /min)	196 (5.54) 20 (5.0) 6400 (181) 572 (16.2)	186 (5.27) 20 (5.0) 6400 (181) 572 (16.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m ³ /min) °F (°C)	1.8 (6.0) 488 (13.8) 873 (467)	1.8 (6.0) 456 (12.9) 806 (430)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	92	92

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)						
Self Excited		119	119	108	90	100
PM Excited**		130	130	120	98	110
AREP Excited		TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby Prime	89.0 89.3	89.0 89.3	89.0 89.3	88.8 89.4	89.0 89.7
Reactances (per unit):	X _d X' _d X'' _d X _q X'' _q X ₂ X ₀	2.85 0.113 0.059 1.71 0.075 0.68 0.010	2.85 0.113 0.059 1.71 0.075 0.68 0.010	3.10 0.125 0.064 1.86 0.083 0.074 0.001	3.79 0.163 0.079 2.28 0.101 0.090 0.010	3.39 0.138 0.070 2.04 0.090 0.080 0.001
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 1.206 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only

** With PMG Excited Option AR12

STANDBY 60 kW
PRIME 54.5 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D60P3 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	60 (75.0)	54.5 (68.1)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.2 (8.5) 1.8 (6.9)	2.2 (8.5) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	5.00 (19.00) 3.75 (14.25) 2.50 (9.50)	4.55 (17.27) 3.41 (12.95) 2.28 (8.64)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	5.2 (19.7) 9.7 (3.0) 1870 (7080) 158 (70) 13.8 (7.7) 2389 (42.0) 1371 (24.1) 6.0 (4.5)	5.2 (19.7) 9.7 (3.0) 1870 (7080) 158 (70) 13.8 (7.7) 2162 (38.0) 1246 (21.4) 6.0 (4.5)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m ³ /min) in H ₂ O (kPa) cfm (m ³ /min) cfm (m ³ /min)	197 (5.6) 12 (3.0) 9958 (282) 678 (19.2)	174 (5.0) 12 (3.0) 9958 (282) 678 (19.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m ³ /min) °F (°C)	1.8 (6.0) 516 (14.6) 896 (480)	1.8 (6.0) 487 (13.8) 860 (460)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	97	97

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)						
Self Excited		166	166	152	124	140
PM Excited**		180	180	174	136	152
AREP Excited		TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby Prime	90.1 90.3	90.1 90.3	90.9 91.2	90.2 90.6	90.7 91
Reactances (per unit):	X _d X' _d X'' _d X _q X'' _q X ₂ X ₀	2.75 0.098 0.050 1.65 0.063 0.057 0.008	2.75 0.098 0.050 1.65 0.063 0.057 0.008	2.99 0.109 0.055 1.80 0.069 0.062 0.005	3.65 0.131 0.066 2.19 0.084 0.075 0.007	3.27 0.120 0.060 1.96 0.075 0.068 0.005
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 0.365 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only

** With PMG Excited Option AR12

STANDBY 60 kW
PRIME 54.5 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

D60P2 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Standby	Prime
Power Rating	kW (kVA)	60 (75.0)	54.5 (68.1)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Cooler: Watercooled Oil Type Required: API CD 15W-40 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.2 (8.5) 1.8 (6.9)	2.2 (8.5) 1.8 (6.9)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	g/hr (L/hr) g/hr (L/hr) g/hr (L/hr)	5.90 (22.35) 4.55 (17.23) 3.29 (12.46)	5.34 (20.22) 4.18 (15.8) 3.06 (11.58)
Engine Electrical System Voltage/Ground: 12/Negative Battery Charging Alternator Ampere Rating	amps	55	55
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) ft H ₂ O (m H ₂ O) U.S. gal/hr (L/hr) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) hp (kW)	5.9 (22.2) 14.1 (4.3) 2932 (11 100) 158 (70) 13.9 (7.7) 2958 (52.0) 1706 (30.0) 5.1 (3.8)	5.9 (22.2) 14.1 (4.3) 2932 (11 100) 158 (70) 13.9 (7.7) 2673 (47.0) 1496 (26.3) 5.1 (3.8)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air Alternator Cooling Air	cfm (m ³ /min) in H ₂ O (kPa) cfm (m ³ /min) cfm (m ³ /min)	196 (5.54) 20 (5.0) 6400 (181) 678 (19.2)	186 (5.27) 20 (5.0) 6400 (181) 678 (19.2)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	in Hg (kPa) cfm (m ³ /min) °F (°C)	1.8 (6.0) 488 (13.8) 873 (467)	1.8 (6.0) 456 (12.5) 806 (430)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	95	95

Alternator Technical Data		347/600V	277/480V	266/460V	120/240V 120/208V	127/220V
Motor Starting Capability: (kVA) (30% Voltage Dip)	Self Excited	166	166	152	124	140
	PM Excited**	180	180	174	136	152
	AREP Excited	TBA	TBA	TBA	TBA	TBA
Full Load Efficiencies:	Standby	91.1	91.1	90.9	90.2	90.7
	Prime	91.3	91.3	91.2	90.6	91.0
Reactances (per unit): Reactances shown are applicable to the standby rating.	X _d	2.75	2.75	2.99	3.65	3.27
	X' _d	0.098	0.098	0.109	0.131	0.120
	X'' _d	0.050	0.050	0.055	0.066	0.060
	X _q	1.65	1.65	1.80	2.19	1.96
	X'' _q	0.063	0.063	0.069	0.084	0.075
	X ₂	0.057	0.057	0.062	0.075	0.068
	X ₀	0.008	0.008	0.005	0.007	0.005
Time Constants:		t' _d 0.050 sec	t'' _d 0.005 sec	t' _{do} 0.365 sec	t _a 0.010 sec	

* dB(A) levels are for guidance only
 ** With PMG Excited Option AR12