


DLI series

**Die Cutting
Slitting
Rewinding**

DLI Standard Features

- ▶ eDrive web transport system
- ▶ Unwind shaft - 3"/76 mm (additional shaft sizes available)
- ▶ 3"/76 mm pneumatic core type rewind shaft (various sizes available)
- ▶ Controlled acceleration/deceleration
- ▶ Auto stop and roll end shut off
- ▶ Manual tension control on rewind (optional automatic)
- ▶ Magnetic particle clutch on rewind
- ▶ Two speed encased gearbox with automatic inside/outside wrap
- ▶ Hardened web separating idler
- ▶ Electronic single edge web guiding system (+/- 12.5 mm correction)
- ▶ Pre-determining electronic length counting
- ▶ Pre-select slowdown
- ▶ Side mount jog pedal
- ▶ Totalizer
- ▶ Separate unwind stand (max. 40"/1000 mm roll)
- ▶ Unwind shaft - 3"/76 mm (additional shaft sizes available)
- ▶ One die cutting station

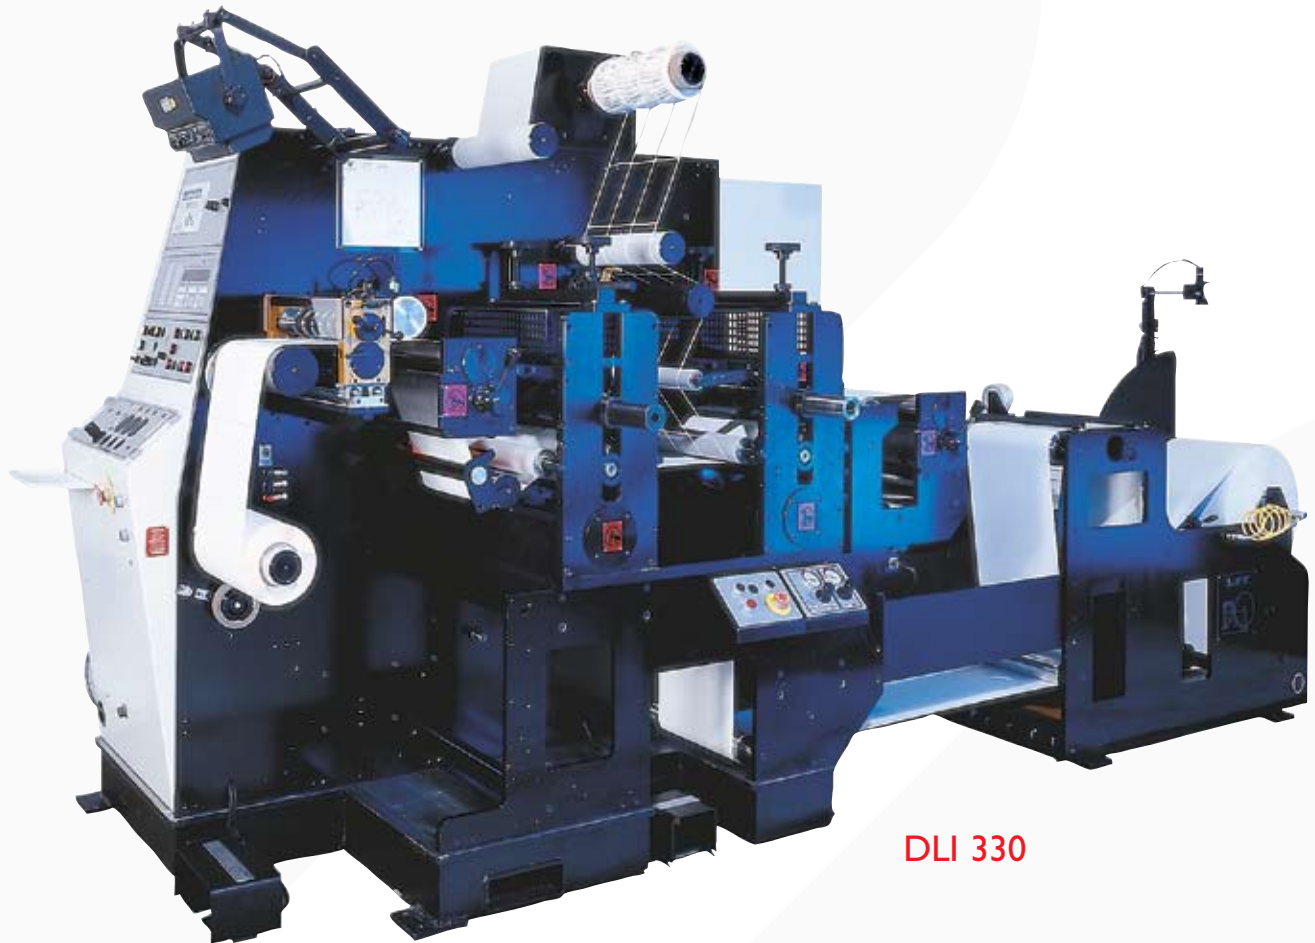

DLI 330



ROTOFLEX


LEADERS BY DESIGN

DLI Options

- ▶ Shear knife slitter
- ▶ Crush knife slitter
- ▶ Razor slitter
- ▶ Rotary die slitter
- ▶ Unwind stand
- ▶ Semi-automatic 2-spindle turret
- ▶ Ultrasonic tension unwind
- ▶ Automatic web guide
- ▶ Second web guide
- ▶ Printed line guide
- ▶ Static eliminator
- ▶ Auto web gripper/feeder
- ▶ Flag/millsplice detector
- ▶ Matrix and missing label detector
- ▶ Semi automatic indexing
- ▶ High intensity strobe light
- ▶ Ironing roller
- ▶ Bow roller
- ▶ Clear on clear count sensor
- ▶ Individual label & linear counter
- ▶ Individual label & butt cut counter
- ▶ Pen marking system
- ▶ Waste wind up
- ▶ Dual rewind
- ▶ Second die station
- ▶ Integrated bar coding
- ▶ Sheeter station with conveyor/stacker
- ▶ Delam/Relam
- ▶ Overscorer
- ▶ Underscorer
- ▶ Full vision system
- ▶ Laminating station


DLI Machine Specifications

DLI 330 Top View

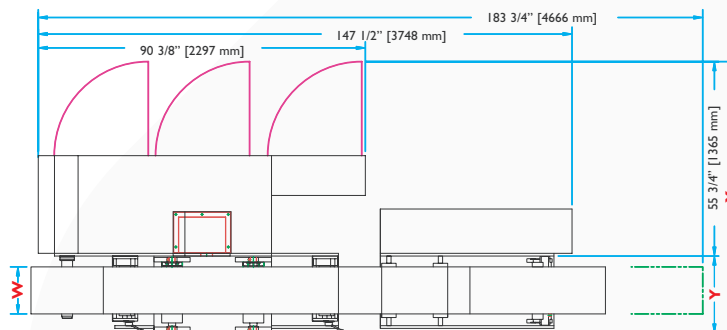

machine	DLI 330	DLI 400	DLI 500	DLI 600
W web width	13.25\" [337 mm]	16.25\" [413 mm]	20.25\" [515 mm]	24.25\" [610 mm]
X with door open	75\" [1905 mm]	78\" [1981 mm]	82\" [2083 mm]	86\" [2185 mm]
Y	21 1/4\" [540 mm]	24 1/4\" [616 mm]	32 1/4\" [819 mm]	36 1/4\" [920 mm]

DLI 330 Front View

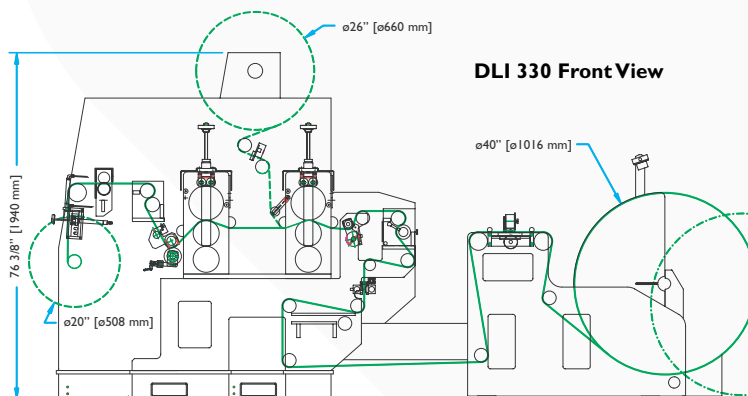

	DLI 330	DLI 400	DLI 500	DLI 600
Max. web width	13.25\"/337 mm	16.25\"/413 mm	20.25\"/515 mm	24.25\"/610 mm
Max. unwind diameter	40\"/1000 mm	40\"/1000 mm	40\"/1000 mm	40\"/1000 mm
Max. rewind diameter	20\"/500 mm	20\"/500 mm	20\"/500 mm	20\"/500 mm
Max. machine speed (may vary with application)	750 fpm (230 m/min)	750 fpm (230 m/min)	750 fpm (230 m/min)	750 fpm (230 m/min)
Die station anvil size	15\"/381 mm	18\"/457 mm	18\"/457 mm	18\"/457 mm
Minimum die repeat in die station	8.5\"/216 mm	12\"/305 mm	12\"/305 mm	12\"/305 mm
Maximum die repeat in die station	18\"/457 mm	24\"/610 mm	24\"/610 mm	24\"/610 mm
Motor size	5 hp DC	7.5 hp DC	10 hp DC	10 hp DC
Air supply	60-100 psi	60-100 psi	60-100 psi	60-100 psi
Voltage	Country Specific	Country Specific	Country Specific	Country Specific

All Rotoflex equipment is supported by MAX, the customer service and support arm of Mark AndY Inc. The largest team of technicians and parts specialists in the industry. Rotoflex customers are supported with the knowledge and experience that only an OEM service team can provide. MAX is your friend in flexo.



Mark AndY Canada Inc.
420 Ambassador Drive
Mississauga, ON
Canada L5T 2R5
Tel +1 905 670 8700
Fax +1 905 670 3402
sales@rotoflex.com
www.rotoflex.com

Mark AndY Inc.
World Headquarters
18081 Chesterfield Airport Rd.
Chesterfield, MO USA 63005
Tel +1 636 532 4433
Fax +1 636 532 1510
info@markandy.com
www.markandy.com

Mark AndY AG
European Headquarters
Tel +41 61 487 96 66
Fax +41 61 487 96 65

Mark AndY UK
Tel +44 1625 500964
Fax +44 1625 501334

Mark AndY France
Tel +33 1 64 60 39 90
Fax +33 1 64 60 39 99

MARKANDY