


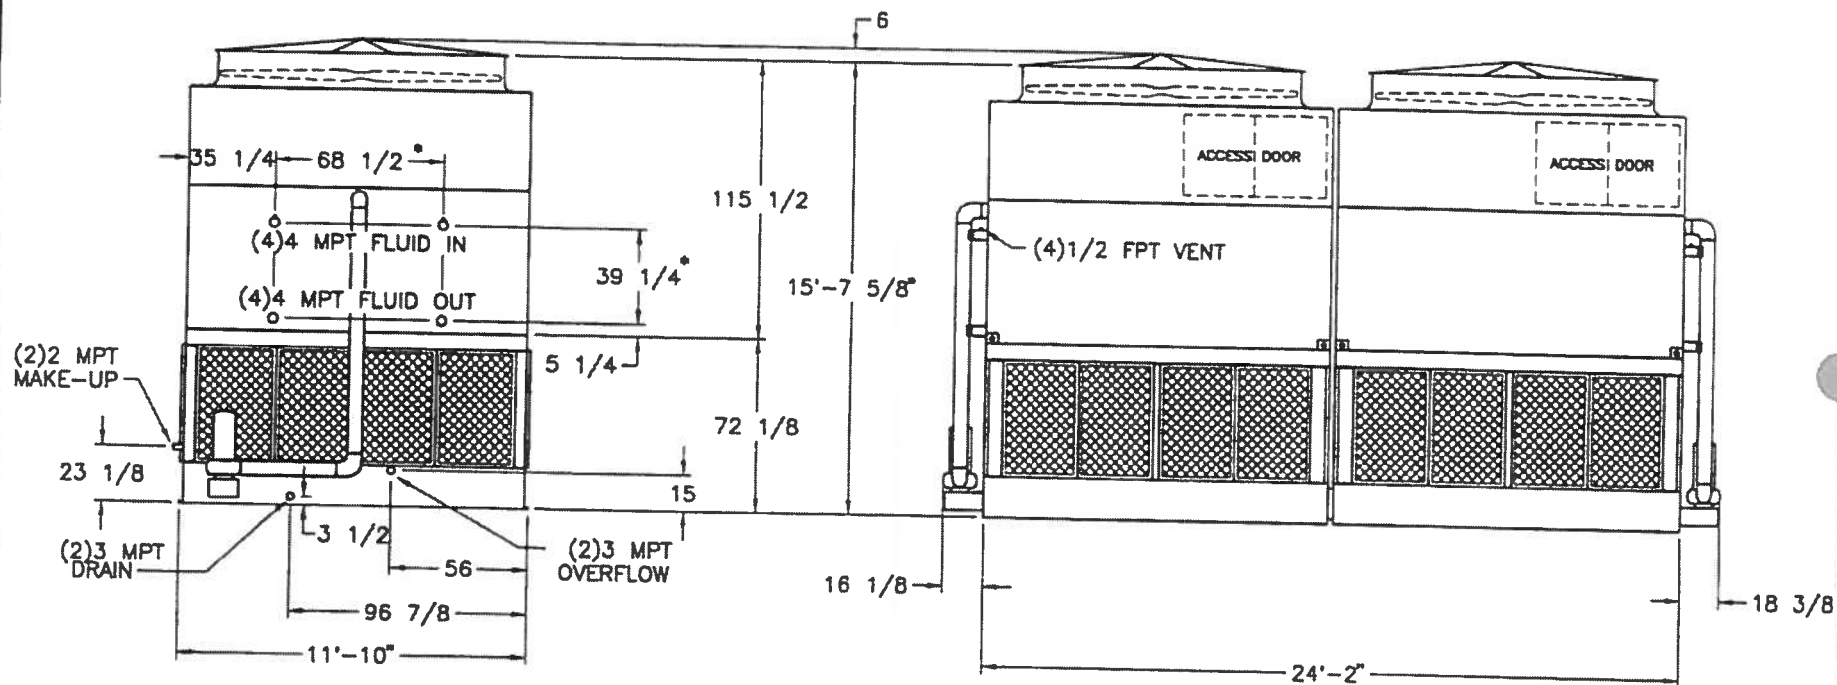

NOTES:

1. MAKE-UP LOCATED 4 3/4" FROM EACH CONNECTION END
2. MAKE-UP WATER PRESSURE 20psi MIN. 50psi MAX.
3. 3/4" MOUNTING HOLES. REFER TO RECOMMENDED STEEL SUPPORT DRAWING.
4. * APPROXIMATE DIMENSIONS. DO NOT USE FOR PREFABRICATION OF EXISTING PIPING.
5. HEAVIEST SECTION IS UPPER SECTION.
6. MPT DENOTES MALE PIPE THREAD. FPT DENOTES FEMALE PIPE THREAD. BFW DENOTES BEVELED FOR WELDING.

WEIGHTS			NO. SHIPPING SECTIONS
SHIPPING	OPER.	HEAVIEST SECTION	
38220	58130	16970	4

MODEL NUMBER: 2) ATW 276C CLOSED CIRCUIT COOLERS

CERTIFIED FOR Hewlett Packard Company

CUSTOMER ORDER NO. #52S204739

CAPACITY 1,600 GPM Each Unit

FAN MOTOR HP (2) 30 HP Inverter Duty

PUMP MOTOR HP (2) 5 HP

REMARKS: Drives Sized For 0" ESP., Pressure Drop Through Coils = 4.2 PSI., ACCESSORIES: Stainless Steel Basin, External Service Platform With Safety Cages And Ladder.

Project: Hewlett Packard Co.

EVAPCO NO. #99-8082/83W

95 ° IN 85 ° OUT 73.8 ° E.W.B.

ELEC. SPEC. 460/3/60 TEAO

ELEC. SPEC. 460/3/60 TEFC



CLOSED CIRCUIT COOLER

WA122410ERB-ST

1/29/99 dab