

Model: **125REOZJB**

**KOHLER** POWER SYSTEMS

190-600 V

Diesel

**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED

## Ratings Range

		60 Hz	50 Hz
Standby:	kW	95-130	84-108
	kVA	95-163	84-135
Prime:	kW	86-115	77-100
	kVA	86-144	77-125


## Generator Set Ratings

Alternator	Voltage	Ph	Hz	130°C Rise Standby Rating		105°C Rise Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
4S11	120/208	3	60	125/156	434	110/138	382
	127/220	3	60	125/156	410	110/138	361
	120/240	3	60	125/156	376	110/138	331
	120/240	1	60	95/95	396	86/86	358
	139/240	3	60	125/156	376	110/138	331
	220/380	3	60	125/156	237	110/138	209
	277/480	3	60	125/156	188	110/138	165
	347/600	3	60	125/156	150	110/138	132
	110/190	3	50	104/130	395	96/120	365
	115/200	3	50	104/130	375	96/120	346
	120/208	3	50	104/130	361	96/120	333
	110/220	3	50	104/130	341	96/120	315
	110/220	1	50	84/84	382	77/77	350
	220/380	3	50	104/130	198	96/120	182
	230/400	3	50	104/130	188	96/120	173
	240/416	3	50	104/130	180	96/120	167
4S13	120/208	3	60	125/156	434	115/144	399
	127/220	3	60	125/156	410	115/144	377
	120/240	3	60	125/156	376	115/144	346
	120/240	1	60	100/100	417	90/90	375
	139/240	3	60	130/163	391	115/144	346
	220/380	3	60	125/156	237	115/144	218
	277/480	3	60	130/163	195	115/144	173
	347/600	3	60	130/163	156	115/144	138
	110/190	3	50	108/135	410	100/125	380
	115/200	3	50	108/135	390	100/125	361
	120/208	3	50	108/135	375	100/125	347
	110/220	3	50	108/135	354	100/125	328
	110/220	1	50	90/90	409	80/80	364
	220/380	3	50	108/135	205	100/125	190
	230/400	3	50	108/135	195	100/125	180
	240/416	3	50	108/135	187	100/125	173

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. *Standby Ratings:* The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. *Prime Power Ratings:* At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

## Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A standard one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Alternator features:
  - The unique Fast-Response™ II excitation system delivers excellent voltage response and short-circuit capability using a permanent magnet (PM)-excited alternator.
  - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
  - Kohler designed controllers for guaranteed system integration and remote communication. See Controllers on page 3.
  - The low coolant level shutdown prevents overheating (standard on radiator models only).
  - Integral vibration isolation eliminates the need for under-unit vibration spring isolators.

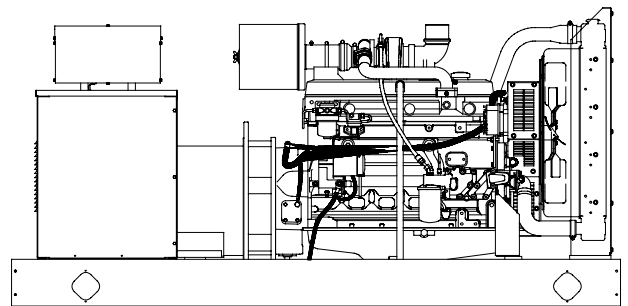

# Alternator Specifications

Specifications	Alternator
Manufacturer	Kohler
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet
Leads: quantity, type	12, Reconnectable
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material	Class H
Temperature rise	130°C, Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Voltage regulation, no-load to full-load	
Permanent magnet (PM) alternator	±2% Average
550 controller (with 0.5% drift due to temperature variation)	3-Phase Sensing, ±0.25%
One-step load acceptance	100% of Rating
Unbalanced load capability	100% of Rated Standby Current
Peak motor starting kVA:	(35% dip for voltages below)
480 V, 380 V 4S11 (12 lead)	460 (60 Hz), 350 (50 Hz)
480 V, 380 V 4S13 (12 lead)	515 (60 Hz), 370 (50 Hz)

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Fast-Response™ II brushless alternator with brushless exciter for excellent load response.

## Application Data

### Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	John Deere	
Engine model	6068TF250	6068TF220
Engine type	4-Cycle, Turbocharged	
Cylinder arrangement	6 Inline	
Displacement, L (cu. in.)	6.79 (414)	
Bore and stroke, mm (in.)	106 x 127 (4.19 x 5.00)	
Compression ratio	17.0:1	
Piston speed, m/min. (ft./min.)	457 (1500)	381 (1250)
Main bearings: quantity, type	7, Replaceable Insert	
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	142 (190)	121 (162)
Cylinder head material	Cast Iron	
Crankshaft material	Forged Steel	
Valve material:		
Intake	Chromium-Silicon Steel	
Exhaust	Stainless Steel	
Governor: type, make/model	Mechanical, Stanadyne/DB4	
Frequency regulation, no-load to full-load	3-5%	
Frequency regulation, steady state	±0.33% (mech. governor) ±0.25% (elect. isoch. gov.)	
Frequency	Fixed	
Air cleaner type, all models	Dry	

### Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m³/min. (cfm)	26.1 (920)	18.4 (650)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	601 (1114)	581 (1077)
Maximum allowable back pressure, kPa (in. Hg)	7.5 (2.2)	
Exhaust outlet size at engine hookup, mm (in.)	98 (3.86)	

### Engine Electrical

Engine Electrical System (12/24 Volt*)	60 Hz	50 Hz
Battery charging alternator:	12 Volt/24 Volt	
Ground (negative/positive)	Negative	
Volts (DC)	12/24	
Ampere rating	55/45	
Starter motor rated voltage (DC)	12/24	
Battery, recommended cold cranking amps (CCA):	12 Volt/24 Volt	
Quantity, CCA rating each	One, 800/Two, 570	
Battery voltage (DC)	12	

\*12-volt or 24-volt engine electrical systems are available.

### Fuel

Fuel System	60 Hz	50 Hz
Fuel supply line, min. ID, mm (in.)	11.0 (0.44)	
Fuel return line, min. ID, mm (in.)	6.0 (0.25)	
Max. lift, fuel pump: type, m (ft.)	Engine-Driven, 1.8 (6.0)	
Max. fuel flow, Lph (gph)	113 (29.9)	109 (28.9)
Fuel prime pump	Manual	
Fuel filter		
Secondary	8 Microns @ 98% Efficiency	
Water Separator	Yes	
Recommended fuel	#2 Diesel	

### Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	19.0 (20.1)	
Oil pan capacity with filter, L (qt.)	19.9 (21.0)	
Oil filter: quantity, type	1, Cartridge	
Oil cooler	Water-Cooled	

## Application Data

### Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)*	50 (122)	
Engine jacket water capacity, L (gal.)	11.3 (3.0)	
Radiator system capacity, including engine, L (gal.)	23 (6.1)	
Engine jacket water flow, Lpm (gpm)	186 (49)	159 (42)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	76.3 (4342)	67.0 (3810)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	600 (24)	
Fan, kWm (HP)	4.2 (5.6)	2.6 (3.5)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.125 (0.5)	

\* Enclosure with enclosed silencer reduces ambient temperature capability by 5°C (9°F).

Remote Radiator System†	60 Hz	50 Hz
Exhaust manifold type	Dry	
Connection sizes:		
Water inlet, ID hose, mm (in.)	51 (2.0)	
Water outlet, ID hose, mm (in.)	64 (2.5)	
Static head allowable above engine, kPa (ft. H <sub>2</sub> O)	63 (21)	

† Contact your local distributor for cooling system options and specifications based on your specific application.


### Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m <sup>3</sup> /min. (scfm)‡	178 (6300)	133 (4700)
Cooling air required for generator set when equipped with city water cooling or remote radiator, based on 14°C (25°F) rise, m <sup>3</sup> /min. (scfm)‡	142 (5000)	122 (4300)
Combustion air, m <sup>3</sup> /min. (cfm)	9.2 (326)	6.9 (244)
Heat rejected to ambient air:		
Engine, kW (Btu/min.)	28.7 (1630)	23.7 (1350)
Alternator, kW (Btu/min.)	9.3 (530)	9.1 (520)

‡ Air density = 1.20 kg/m<sup>3</sup> (0.075 lbm/ft<sup>3</sup>)


Fuel Consumption	60 Hz	50 Hz
<b>Diesel, Lph (gph) at % load</b>	<b>Standby Rating</b>	
100%	35.6 (9.4)	29.1 (7.7)
75%	27.3 (7.2)	22.0 (5.8)
50%	18.5 (4.9)	15.1 (4.0)
25%	10.6 (2.8)	8.7 (2.3)
<b>Diesel, Lph (gph) at % load</b>	<b>Prime Rating</b>	
100%	31.8 (8.4)	26.9 (7.1)
75%	24.6 (6.5)	20.4 (5.4)
50%	16.7 (4.4)	14.4 (3.8)
25%	9.8 (2.6)	8.3 (2.2)

## Controllers

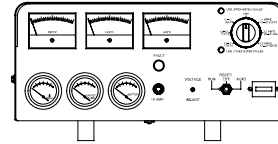


### Decision-Maker® 1 Controller

Single-light annunciation and basic controls with NFPA capability. Relay logic, AC meters, and engine gauge features. 12-volt engine electrical system capability only. Remote or automatic start options. Refer to G6-29 for additional controller features and accessories. **Note:** Not available with 600-volt alternator.

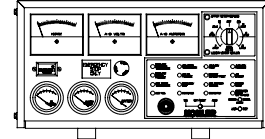

### Decision-Maker® 3+, 16-Light Controller

Audiovisual annunciation with NFPA 110 Level 1 capability. Microprocessor logic, AC meters, and engine gauge features. 12- or 24-volt engine electrical system capability. Remote start, prime power, and remote annunciation options. Refer to G6-30 for additional controller features and accessories.

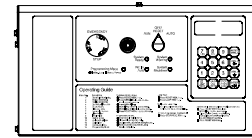

### Decision-Maker® 550 Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities.

- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-46 for additional controller features and accessories.

## Standard Features

- Alternator Protection (standard with Decision-Maker® 550 controller)
- Battery Rack and Cables
- Integral Vibration Isolation
- Local Emergency Stop Switch (standard with Decision-Maker® 550)
- Low Coolant Level Shutdown
- Oil Drain Extension
- Operation and Installation Literature

## Available Options

### Approvals and Listings

- ☐ CSA Approval

### Enclosed Unit

- ☐ Sound Enclosure (with enclosed critical silencer)
- ☐ Weather Enclosure (with enclosed critical silencer)
- ☐ Weather Housing (with roof-mounted critical silencer)

### Open Unit

- ☐ Exhaust Silencer, Critical (kit: PA-354809)
- ☐ Exhaust Silencer, Hospital (kit: PA-365349)
- ☐ Flexible Exhaust Connector, Stainless Steel

### Fuel System

- ☐ Auxiliary Fuel Pump
- ☐ Flexible Fuel Lines
- ☐ Fuel Pressure Gauge
- ☐ Subbase Fuel Tanks

### Controller (Decision-Maker® 3+ and 550 Controllers)

- ☐ Common Failure Relay
- ☐ Communication Products and PC Software (Decision-Maker® 550 controller only)
- ☐ Customer Connection
- ☐ Dry Contact (isolated alarm)
- ☐ Engine Prealarm Senders (Decision-Maker® 3+ controller only)
- ☐ Local Emergency Stop Switch (Decision-Maker® 3+ controller only)
- ☐ Prime Power Switch (Decision-Maker® 550 controller only)
- ☐ Remote Audiovisual Alarm Panel
- ☐ Remote Emergency Stop
- ☐ Remote Mounting Cable
- ☐ Remote Serial Annunciator Panel
- ☐ Run Relay

### Cooling System

- ☐ Block Heater, 1500 W, 110-120V, 1 Ph
- ☐ Block Heater, 1500 W, 190-240 V, 1 Ph (recommended for ambient temperatures below 0°C [32°F])
- ☐ Radiator Duct Flange
- ☐ Remote Radiator Setup

### Electrical System

- ☐ Alternator Strip Heater
- ☐ Battery
- ☐ Battery Charger, Equalize/Float Type
- ☐ Battery Heater
- ☐ Line Circuit Breaker (NEMA type 1 enclosure)
- ☐ Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)
- ☐ Safeguard Breaker (not available with Decision-Maker® 550 controller)

## Paralleling System

- ☐ Reactive Droop Compensator (Decision-Maker® 3+ controller)
- ☐ Remote Speed Adjust Control
- ☐ Remote Voltage Adjust Control
- ☐ Voltage Regulator Relocation (Decision-Maker® 3+ controller)

## Miscellaneous

- ☐ Air Cleaner, Heavy Duty
- ☐ Air Cleaner Restriction Indicator
- ☐ Bus Bar
- ☐ Closed Crankcase Vent
- ☐ Electronic Isochronous Governor ( $\pm 0.25\%$  freq. reg. steady state)
- ☐ Engine Fluids Added
- ☐ Rated Power Factor Testing
- ☐ Rodent Guards
- ☐ Skid End Caps

## Literature

- ☐ General Maintenance Literature
- ☐ NFPA 110 Literature
- ☐ Overhaul Literature
- ☐ Production Literature

## Warranty

- ☐ 2-Year Basic
- ☐ 2-Year Prime
- ☐ 5-Year Basic
- ☐ 5-Year Comprehensive
- ☐ 10-Year Major Components

## Miscellaneous Accessories

- ☐ \_\_\_\_\_
- ☐ \_\_\_\_\_


## Dimensions and Weights

Overall Size, L x W x H, mm (in.):

Wide Skid: 2600 x 1040 x 1274 (102.36 x 40.94 x 50.15)

Narrow Skid: 2600 x 864 x 1274 (102.36 x 34.02 x 50.15)

Weight (radiator model), wet, kg (lb.): 1320-1340 (2900-2950)

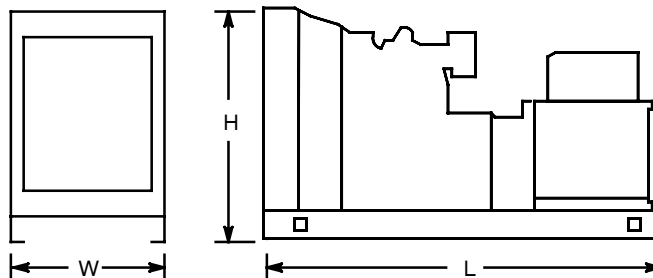

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

## DISTRIBUTED BY: