





ENGINEERING NOTES

1. SPECIFICATIONS PER LITTLEFORD DRY PROCESS, #027464, DATED 3-11-07.
2. THE UNIT SHALL BE CONSTRUCTED OF STEEL, POLISHED TO #120 GRIT CROSS AND FINISH. EXTERIOR FINISHES SHALL BE FURNISHED TO A 480 FINISH. ALL NON-STAINLESS STEEL EXTERIOR PAINTED LITTLEFORD INVOY.
3. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
4. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
5. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
6. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
7. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
8. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
9. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
10. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
11. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
12. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.
13. 304 STAINLESS STEEL COOK TYPE 3 OR STAINLESS STEEL DRY JACKET.

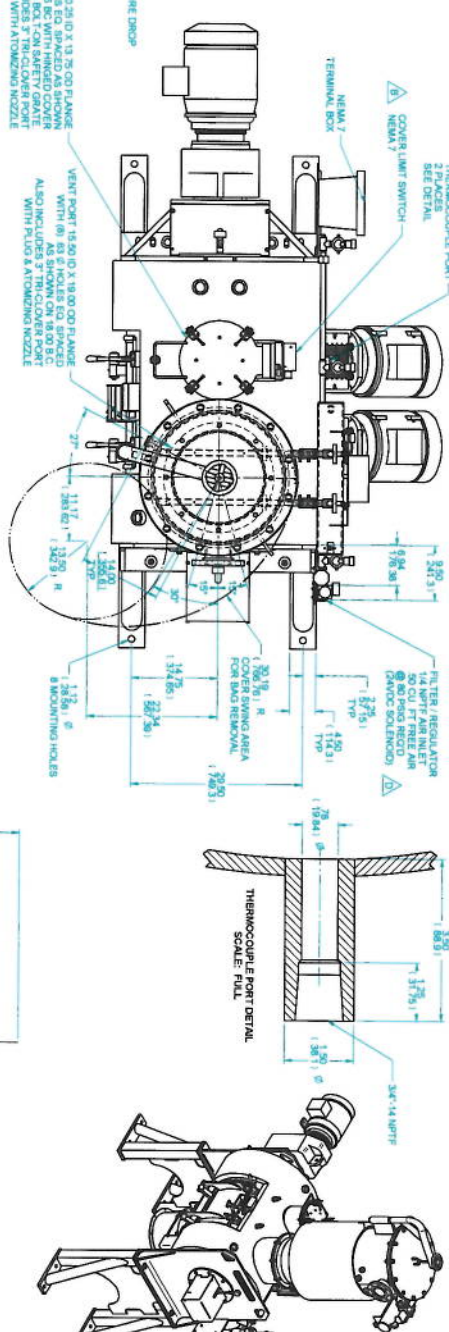

IMPORTANT
THIS UNIT IS PROVIDED WITH AN A.S.M.E. RATED JACKET

IT IS THE CUSTOMER'S RESPONSIBILITY TO PROVIDE THE CUSTOMER WITH THE PROPER PRESSURE RATING SHOWN ON CODE NAME PLATE

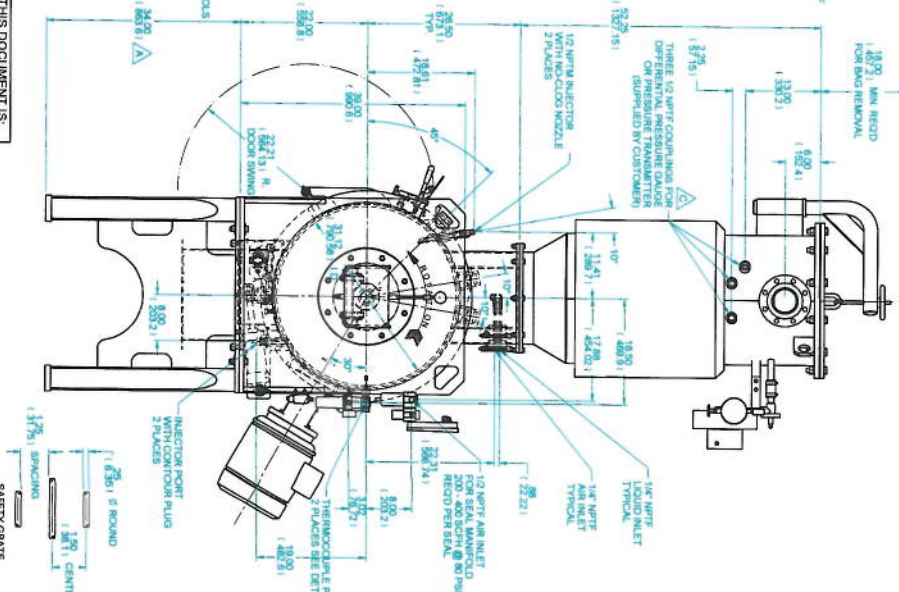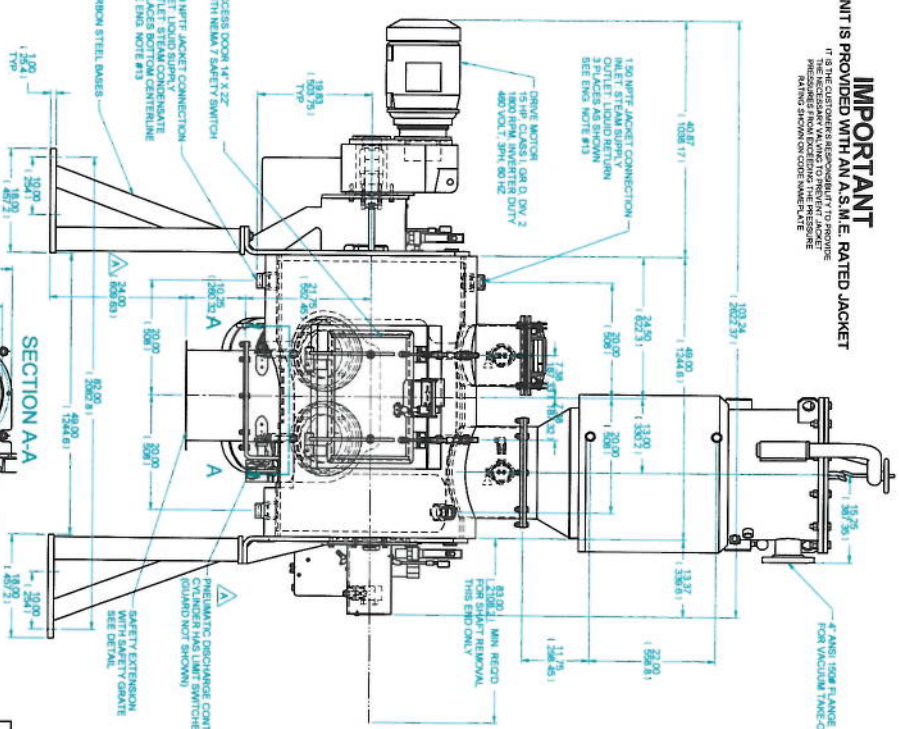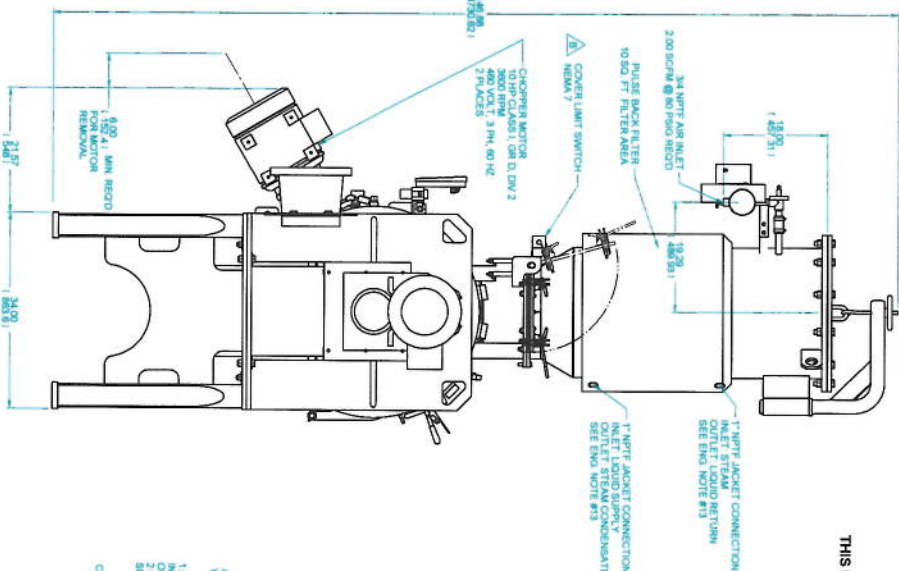

SECTION A-A

ESTIMATED STATIC WEIGHT 2100 LBS.

ESTIMATED STATIC WEIGHT 2000 LBS.

THIS DOCUMENT IS:

APPROVED FOR CONSTRUCTION
LITTLEFORD DRY PROCESS

LITTLEFORD DRY PROCESS
8905750

DATE: 10-1-11
SCALE: 1/4\"/>