
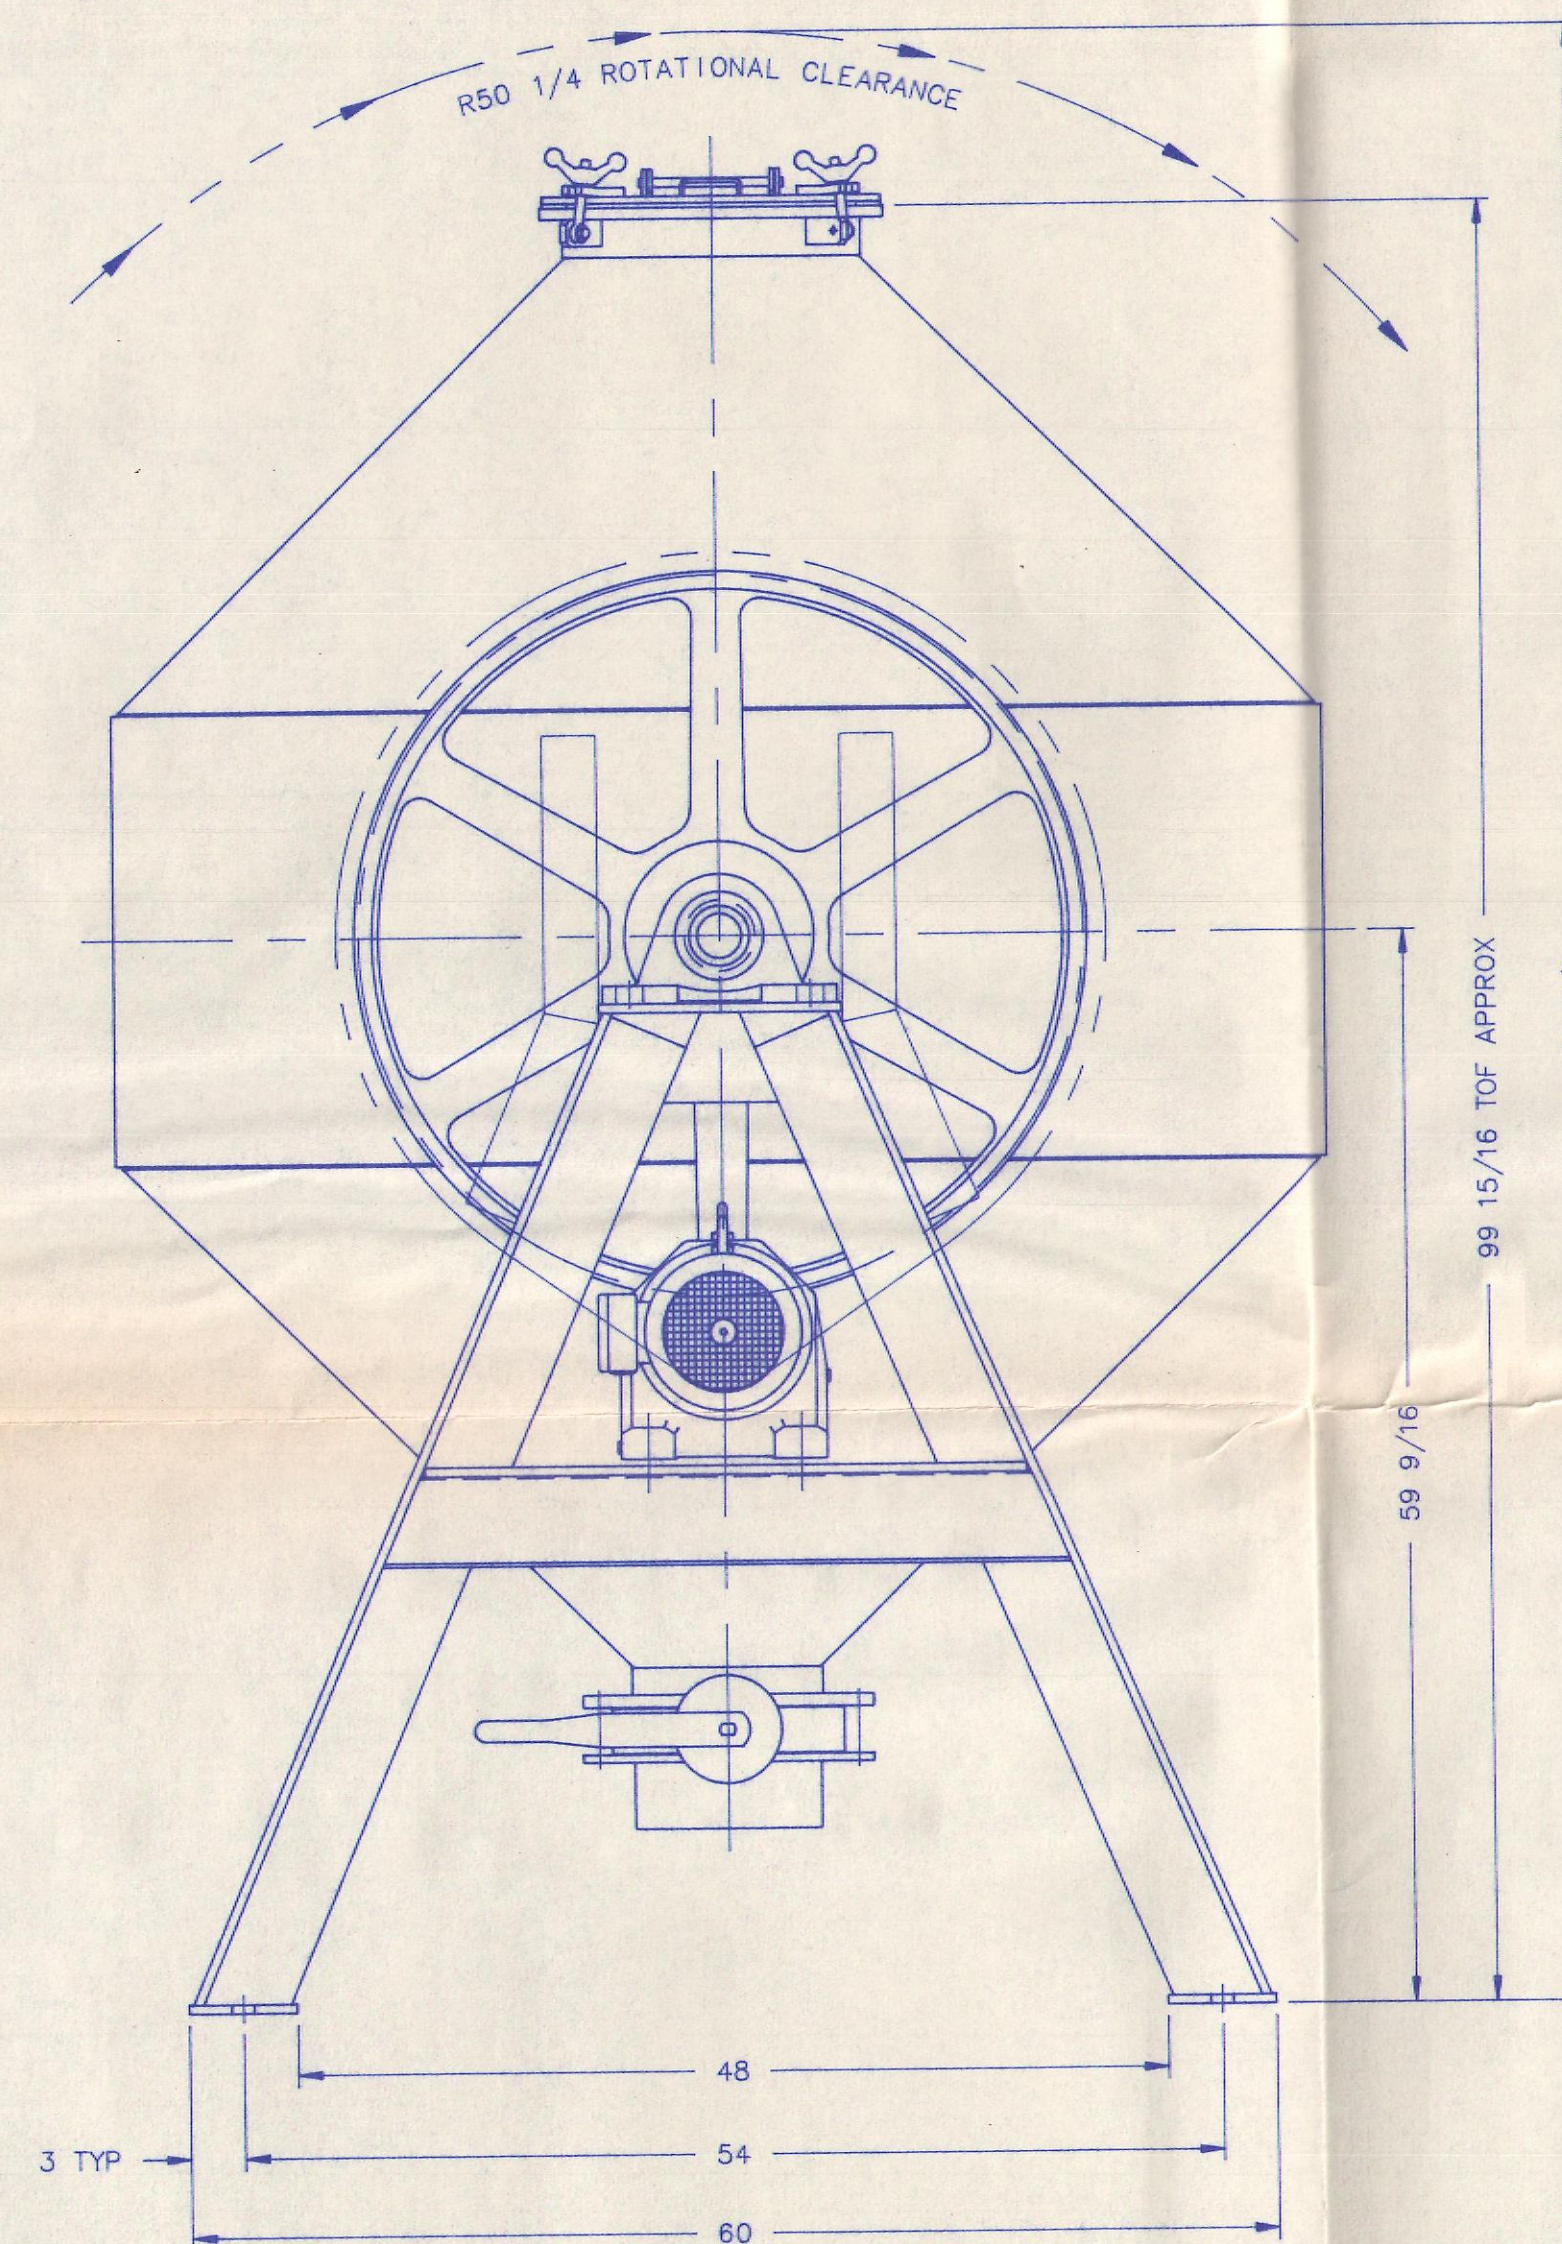


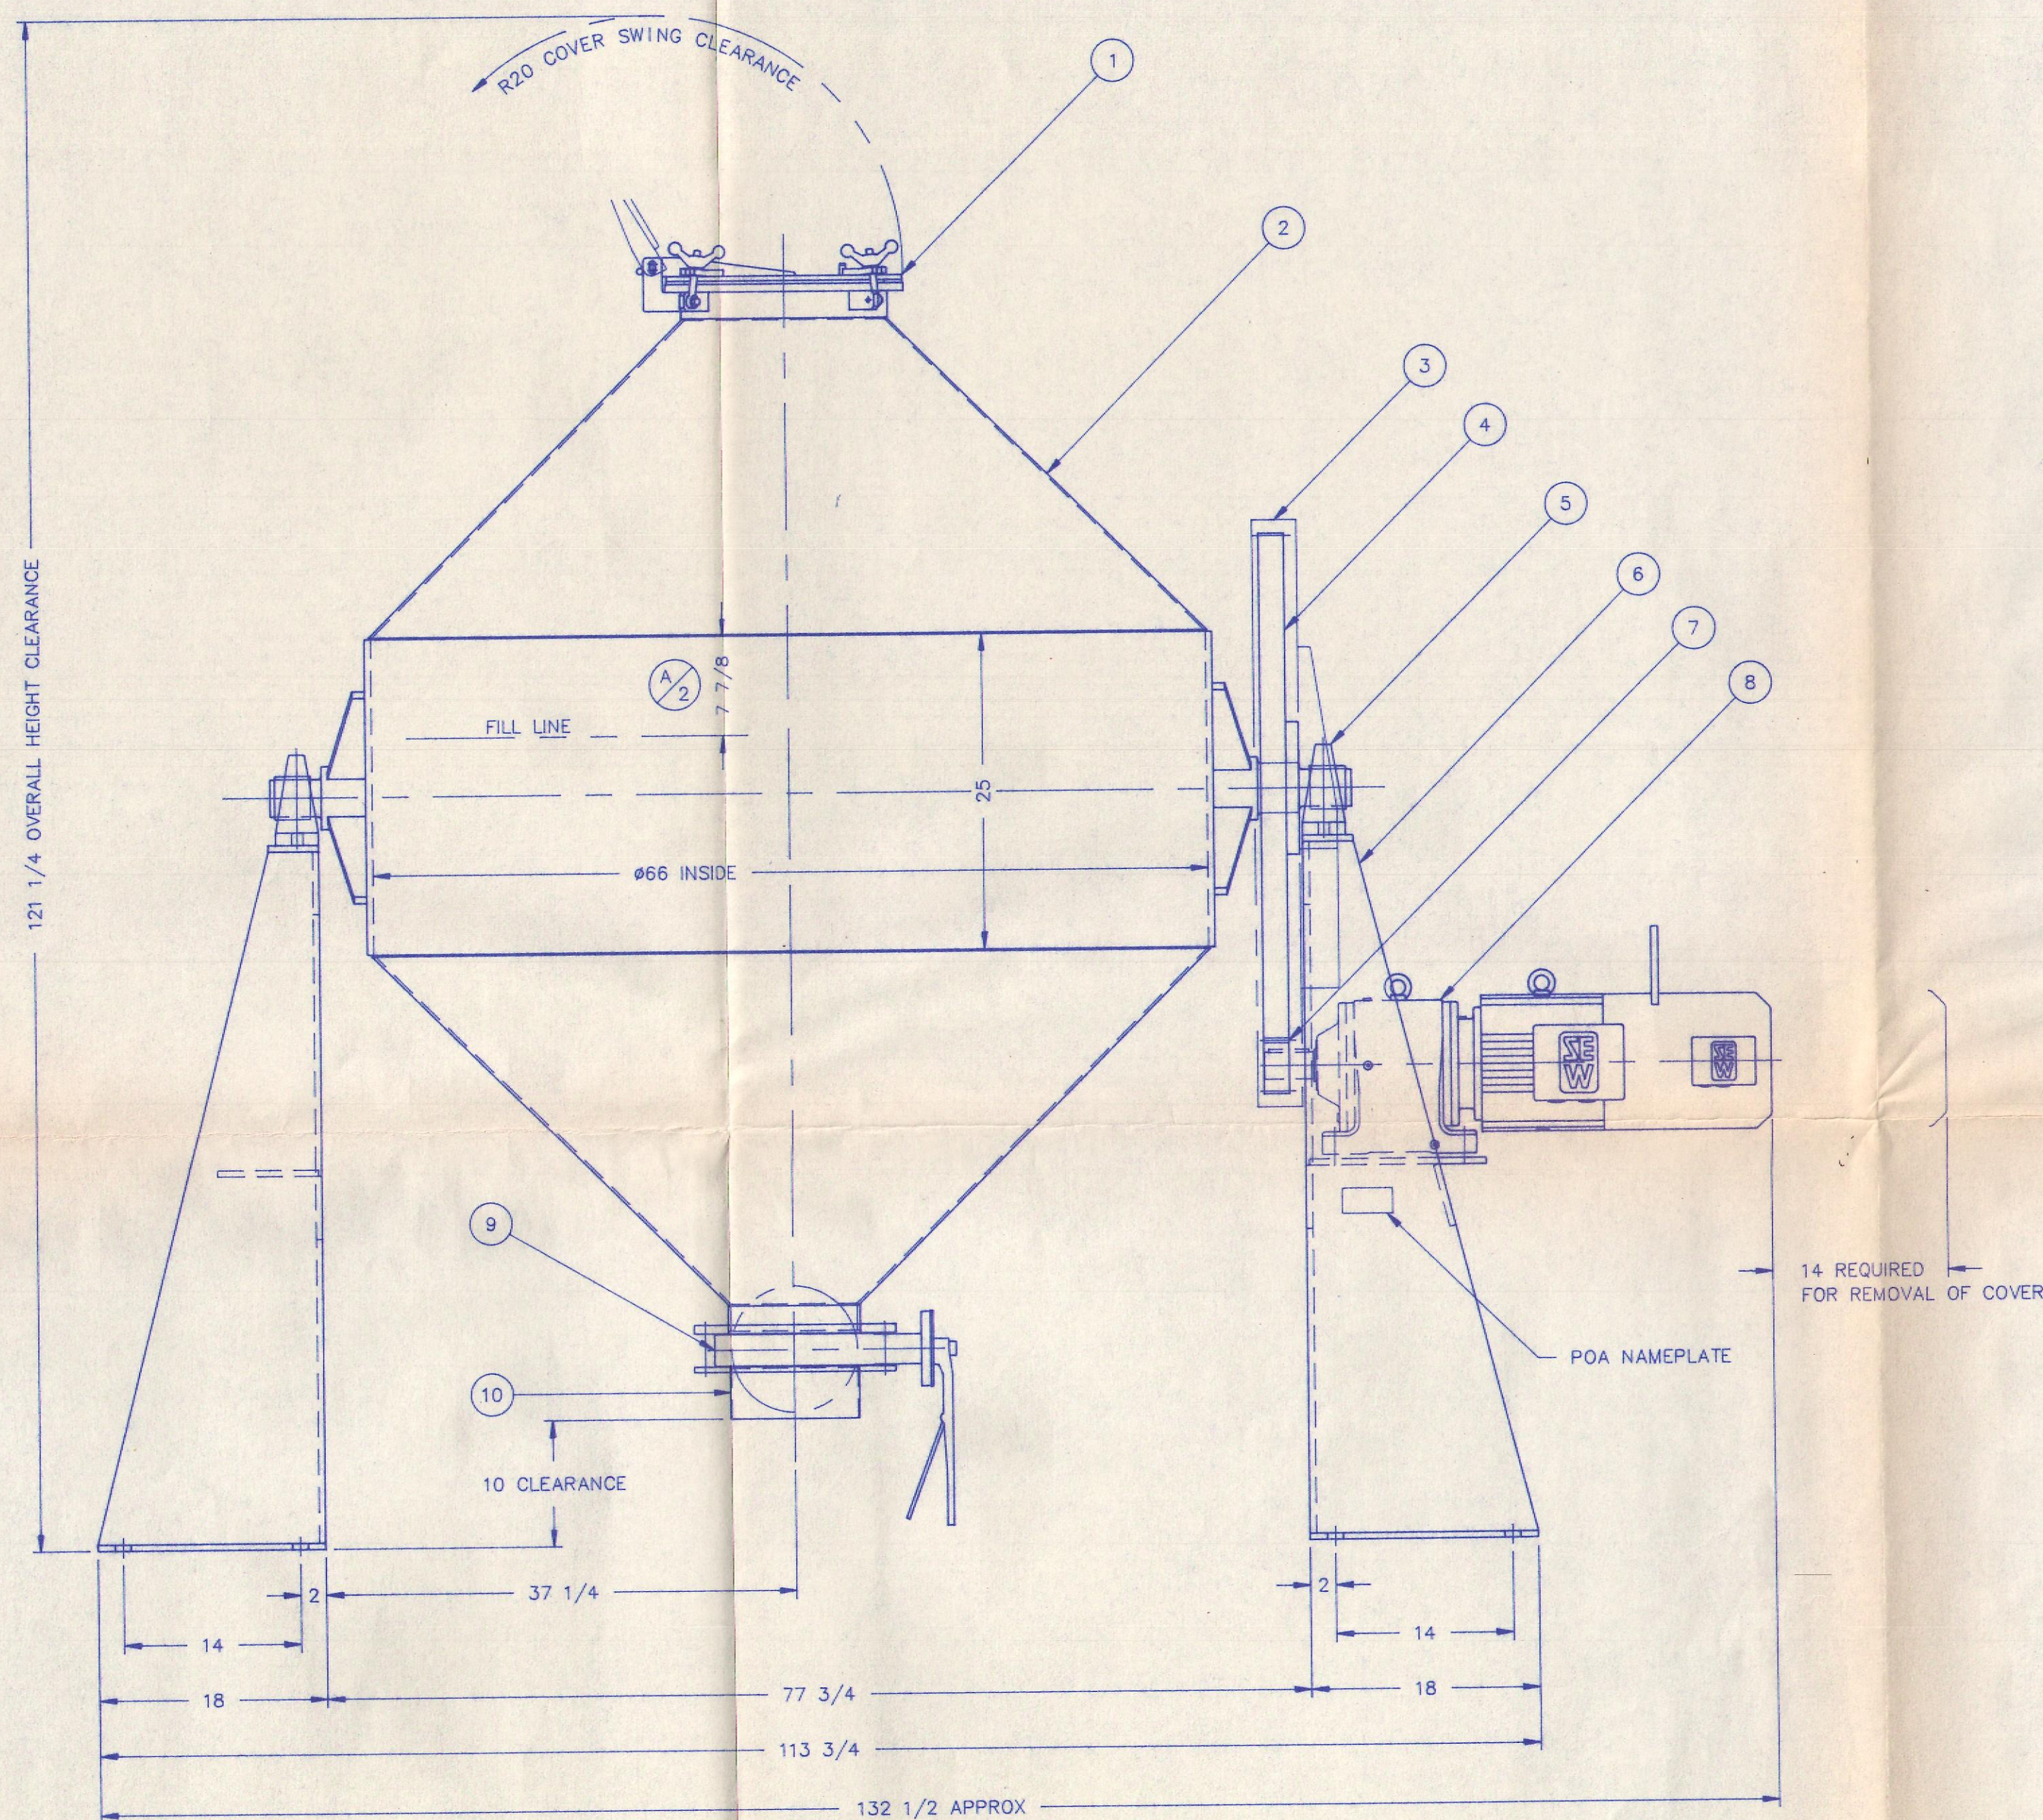

ITEM NO	PART NUMBER	WEIGHT LBS. EAC	DESCRIPTION	VEN/MAN	QTY
11	GDP503		DS-317 ADJUSTABLE FREQUENCY DRIVE, 10 HP, 460/3/60	MAGNETEK	1
10	DA000020	23	Ø10 VALVE NECK FLANGE, T304SS	POA	1
9	B99-10	44	VALVE, DISCHARGE, Ø10, AL BODY, BUNA-N SEAT, MNL ACTR	SURE SEAL	1
8	R80DV132M4	311	GEARMOTOR, INVERTER DUTY, 10HP, TEFC, 460/3/60, 14.46:1	SEW EURODRIVE	1
7	BMHR-V		RATIO, W/ BRAKE & CONTINUOUS FAN		
6	TC000202	806	PINION, 16T, 4DP, 2F, 20PA, Ø2 1/8 BORE, STEEL	POA	1
5	SP-47	26.6	STANDS, DRIVE & IDLER, CS	POA	1
4		350	PILLOW BLOCK BEARING, Ø2 15/16 BORE	SEALMASTER	2
3		45	GEAR WHEEL, 160T, 4DP, 2F, 20PA, Ø3 15/16 BORE, CI	POA	1
2	B0000096	1636	GEAR GUARD, CS	POA	1
1	CC000101	53	BODY, T304SS	POA	1
			Ø16 HINGED COVER, T304SS, W/ WHITE NPRN GASKET	POA	1
ITEM NO			DESCRIPTION	VEN/MAN	QTY

BILL OF MATERIALS

TECHNICAL SPECIFICATIONS AND NOTES

MODEL #: RCB-66 SERIAL #: A45562
MACHINE WEIGHT (EMPTY): 3330
VESSEL VOLUME: 90 cu ft TOTAL
OPERATING CAPACITY: 55 cu ft MAX
MATERIAL: VESSEL - T304SS
MATERIAL: PRODUCT CONTACT - T304SS
FINISH: PRODUCT CONTACT - #4 (150 GRIT) POLISH
FINISH: C.S. - (1) COAT PRIMER & (1) COAT BLUE HAMMERTONE LAQUER
SPEED OF ROTATION: 1-12 RPM (INVERTER SHIPPED LOOSE)
ALL BOLT CIRCLES SHALL STRADDLE CENTER LINE (UNLESS NOTED)
ELECTRICAL REQUIREMENTS: 480V/3PH/60HZ
ELECTRICAL COMPONENTS AND INTERCONNECTING WIRING SUPPLIED BY CUSTOMER
GEAR BACKLASH SET AT: 0.025-0.030

REVISED PRINT
DESTROY ALL PREVIOUS COPIES

PAUL O. ABBÉ INC.

LITTLE FALLS, NEW JERSEY, U.S.A.
PHONE: 1-800-524-2188 FAX: (201) 256-0041

CUSTOMER :		AMOCO POLYMERS			
GENERAL ARRANGEMENT					
OVERSIZED CENTER BAND					
66" ROTA-CONE BLENDER (SPECIAL)					
JSB		B.S.P.		17/MAY/95	
DRAWN BY		CHECKED BY		DATE	
DWG. NO.		GD000132		A	
				1 OF 1	
				SHEET No.	