



Project: _____
Items: _____
Quantity: _____
Approval: _____
Date: _____

NON-INSULATED HEATER PROOFER

Heater Proofer

This unit is designed to promote efficiency and reduce redundancy in operations by combining the function of two equipment into one and leveraging the advent of technology.

Features:

- Heavy duty aluminum construction
- Forced air design
- Dual proof/heat thermostatic control, equipped with read-out LED display,
- Proof mode: 95% RH at 110F
- Heat mode: Max temp 180F
- Corner bumpers
- Cabinet door opens at 270 degrees
- Cabinet doors have aluminum frame and lexan window
- Removable digital drawer
- Can hold 35 18" x 26" pans
- Electrical specifications: 120V – 60 HZ; plugs into standard 110V outlet; NEMA 5-15P
- NSF; ETL

Benefits:

- The pans can be loaded from bottom
- Clear lexan doors allows for greater visibility of food items
- Forced air design provides even heat distribution
- Less time and effort spent in closely monitoring food temperatures and moisture within the heater proofer
- Easily attain accurate and precise temperature and moisture level
- Food quality, texture and freshness was well-maintained
- Removable analog drawer allows for easy and efficient cleaning



NHPL-1836C-DGT






Founded in 1946

Insulated Heater Proofer

NON-INSULATED HEATER PROOFER

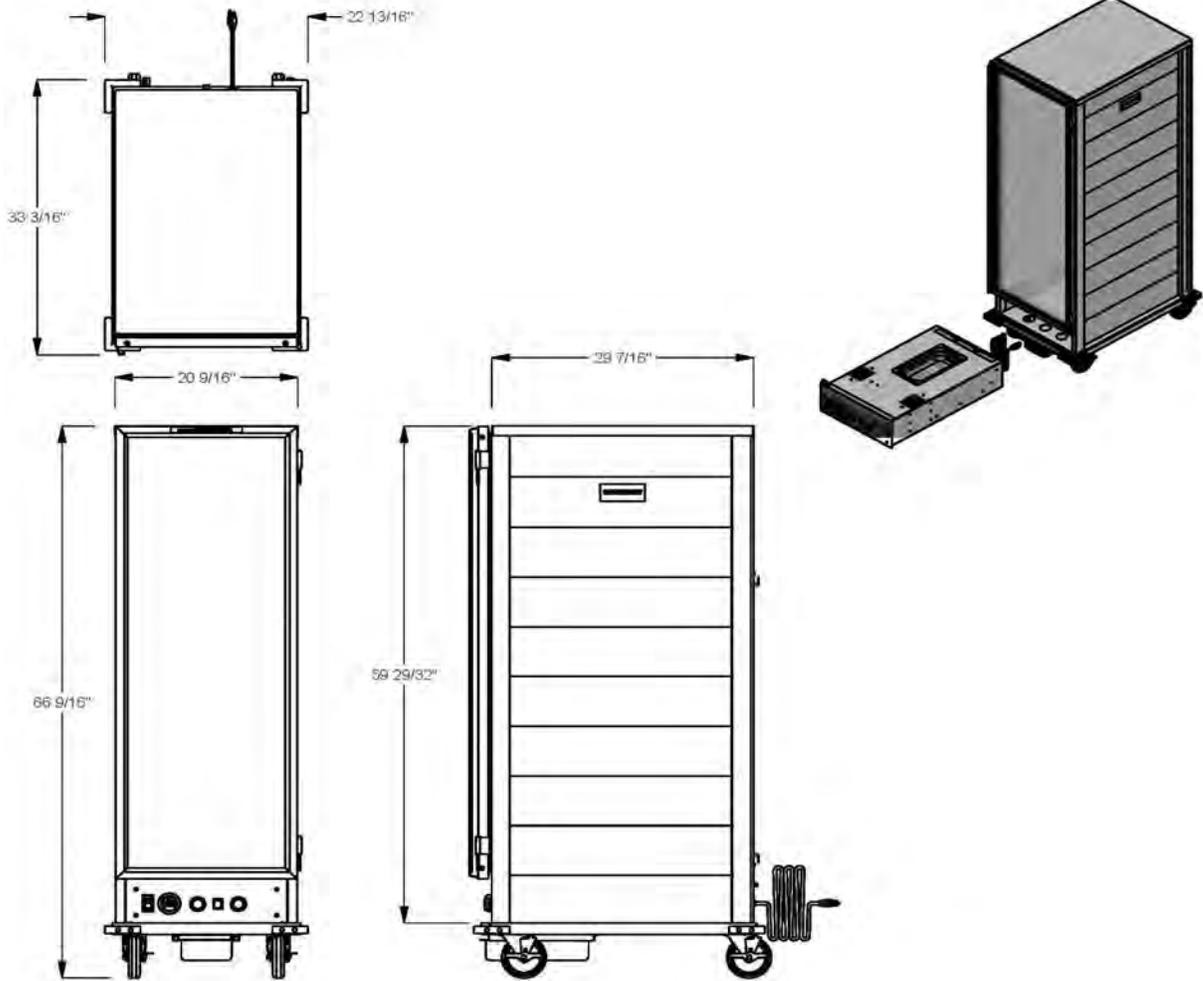

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)	(in)	(mm)		
NHPL-1836C-DGT	1078985	21	533	29.5	749	67	1701	136	60

Freight Class: 175



In line with our policy to continually improve our products, Winholt reserves the right to change materials and specifications without notice.