

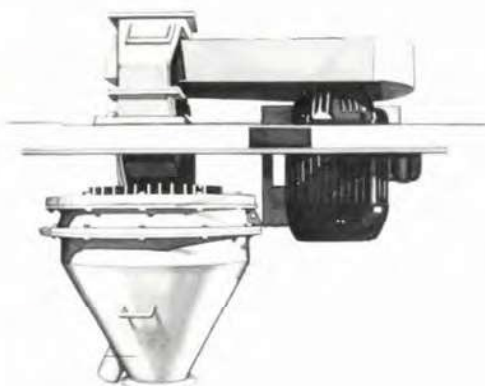


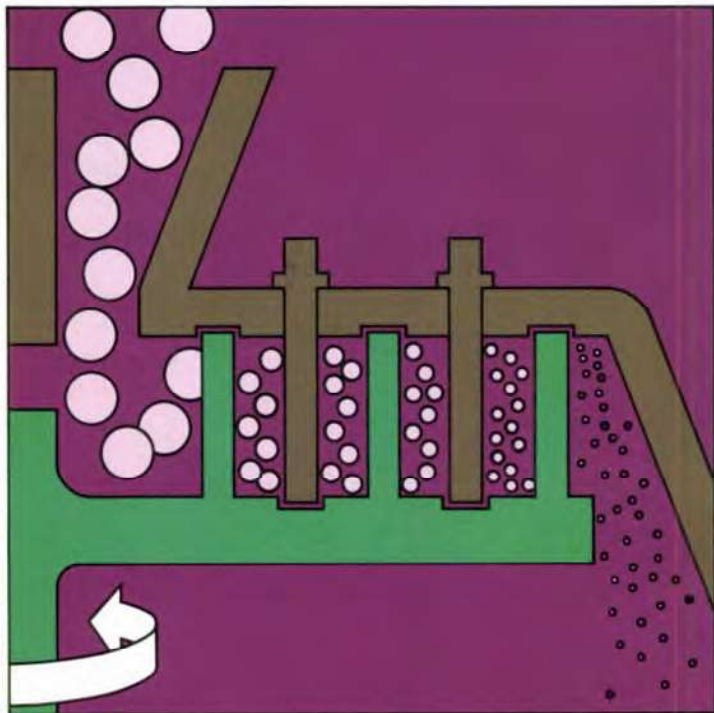

Simplicators

Size	Capacity Tons/Hr.*	Horsepower	Length	Width	Height	Weight (Lbs.)
3	3½	5-15	4'-0"	2'-0"	4'-0"	1000
6	10	to 75	6'-0"	3'-0"	6'-0"	2700
40	50	to 250	8'-6"	5'-0"	8'-9"	7000
Prebreaker	25	to 60	6'-0"	3'-0"	6'-0"	2500

*Flour as feed.

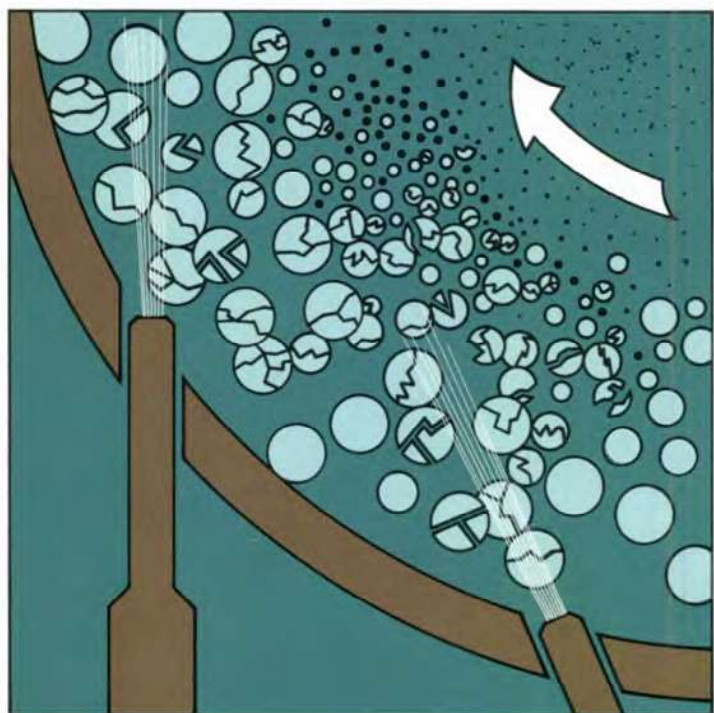

Micronizers

Size	CFM of 100 psig Air Required	or	Lbs./Hr. 550° Steam @ 150 psig	Lbs./Hr. Approx. Capacity*	HP Necessary to Generate 100 psig Air
2"	30		75	1	7.5
4"	55		140	10	15
8"	130		325	100	30
12"	225		550	300	50
15"	350		900	500	75
20"	550		1250	800	100
24"	800		2500	1200	150
30"	1500		4000	2250	300
36"	2250		6000	3500	500
42"	3300		8000	5000	600

*Titanium Dioxide as feed.

Note: Micronizers are most economically applied in situations where conventional methods of mechanical pulverizing fail to achieve the necessary product fineness.