


# Vacuum-Cooking-Cutter K 124

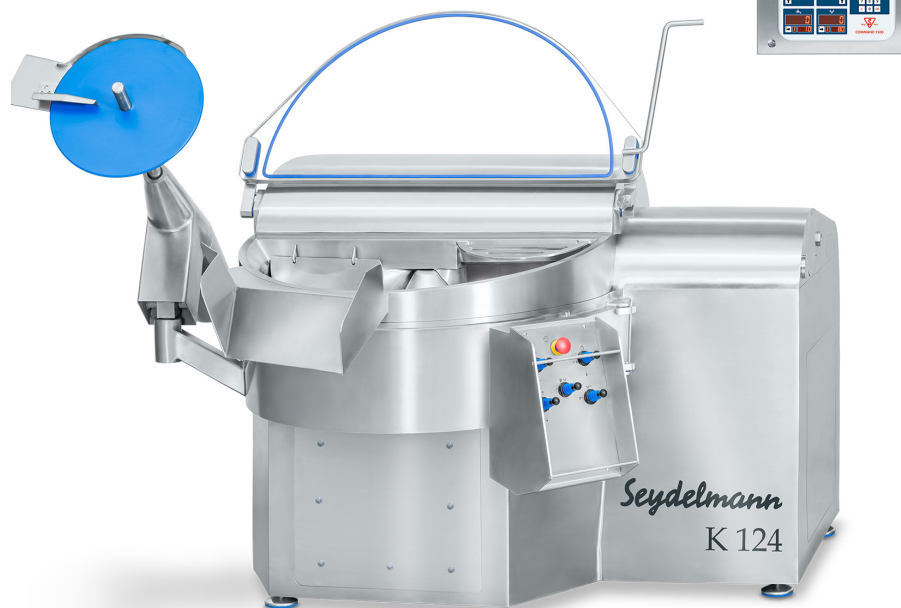

## Vacuum-Cooking-Cutter K 124

The Seydelmann Vacuum-Cooking-Cutter guarantees a fast and smooth reduction and emulsification of the product thanks to the knife head with 6 knives and the flow dynamically shaped lid. The components of all Seydelmann Machines comply with the up-to-date technical development and contribute to an increase in product quality.

### Facts

Bowl content:	120 Liters
Weight:	2450 - 2590 kg / 5401 - 5709 lbs
Loading options:	BW 120, BW 200
Power of motor:	
rasant, ultra:	26 kW / 34 HP
rasant v, ultra v:	32 kW / 43 HP
rasant vs, ultra vs:	45 kW / 60 HP
AC-8:	80 kW / 107 HP

## Machine design

The machine frame of the K 124 is almost entirely made of solid stainless steel. All edges are rounded and all surfaces are polished very precisely and designed with a slope enabling cleaning water to drain completely from all surfaces. The embedded covers and the closed bottom with ventilation prevent pollution and water from entering the machine. The knife hood is flow dynamically shaped. Hardly any unchopped product residue is left in the cover. The gap between the knives and the cover or the bowl is very small.

## Applications

Besides the production of boiled-, dry- and cooked sausage, the universally applicable machine is suitable in particular for the chopping, mixing and emulsification of fresh meat, pre-cut frozen meat, cooked meat, fish, vegetables, meat substitute products made from plant-based proteins, fruits, confectionary goods and other edibles at temperatures from -12 °C (10 °F) up to 85 °C (185 °F).

## Vacuum-Function

Cutting under vacuum, a firm emulsion free of air with a volume reduction of 5-7 % is produced. therefore, an even better fineness of the product is achieved. Thanks to the exclusion of air, the final product gains a significantly longer shelf life. A better protein extraction increases the moisture and fat absorption of the product improving the development of the flavour of spices next to the better binding and stability of the final product.

## Cooking-Function

The bowl is heated up by hot steam from a nozzle system installed below the bowl. Enormous time savings can be achieved thanks to cooking and cutting in one step. The production time can be further reduced using an additional heating for the knife hood. An increase of approximately 10% in the volume of the material as well as the complete preservation of taste, aroma and protein is possible. Cooling is optionally available via a nozzle system.





## Maschinenfabrik Seydelmann KG

info@seydelmann.com Tel. +49 (0)711 / 49 00 90-0 Hoelderlinstrasse 9  
www.seydelmann.com Fax +49 (0)711 / 49 00 90-90 70174 Stuttgart, Germany

**Cutters · Mixers · Grinders**  
**Emulsifiers · Production Lines**

## Measurements

H1	=	900 mm / 35.4 in
H2	=	2360 mm / 92.9 in
H3	=	2530 mm / 99.6 in
T1	=	1520 mm / 59.8 in
T2	=	1750 mm / 68.9 in
T3	=	2240 mm / 88.2 in
B1	=	1810 mm / 71.3 in
B2	=	2480 mm / 97.6 in
B3	=	2530 mm / 99.6 in
X	=	1680 mm / 66.1 in

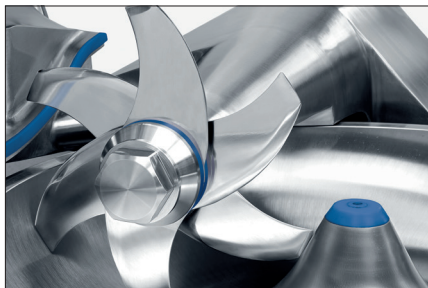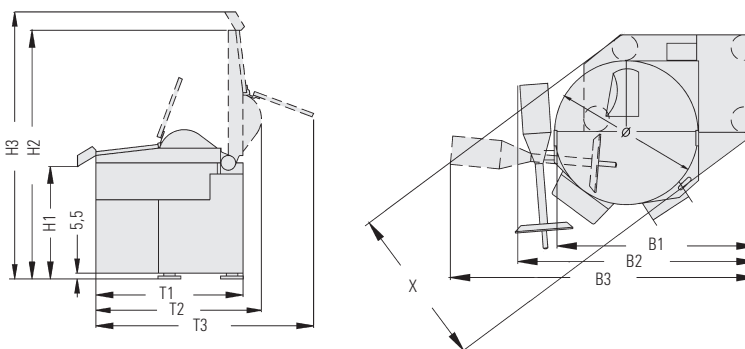

Knife head



Temperature sensor



Fast clamping nut (optional)

## Standard equipment

- Vacuum- and/or Cooking-Function
- Operation via cross lever switches
- Changeable and balanceable knife head
- Hydraulic main cover
- See-through noise absorbing cover made of special plastic
- Ejector
- Separate electrical cabinet made of stainless steel with integrated main switch
- Switch-off for temperature and operating time
- Temperature sensor
- Noise insulation
- Water drain screw
- Greasing point

## Additional equipment

- Hydraulic loading device
- Control of unbalanced state
- Various knife systems
- Up to 9 switch-offs for temperature and operating time
- Cable duct
- Variable adjustment of knife speed (only with AC-motor)
- 4 bowl speeds, steplessly adjustable (only with AC-Motor)
- Water nozzles with water meter
- Liquids dosing system with nozzle
- Fast clamping nut for knives
- Ejector with variable speeds
- Lock of noise absorbing cover
- Cover damping for noise absorbing cover
- Noise insulation version

## Control: Command 1500

- Digital display for gear, knife speed, running time, temperature, bowl speed, time
- Stepless pre-programming of knife speeds (only with AC-Motor)
- Switch-off automatic system for temperature and running time
- Service and maintenance indication
- Individual user administration
- Waterproof stainless steel box

## Optional Auto-Command 2000, 3000, 4000

- Data recording
- Service module
- Recipe calculator
- Production plan
- User friendly and logical Design
- Second workstation away from the production possible
- Indication of all technical parameters
- Waterproof stainless steel box

## Motor types

### AC-8

- 6 steplessly programmable knife speeds
- 2 reverse mixing speeds
- 2 separate bowl speeds
- Frequency-controlled 3-phase motor

### Ultra

- 2 knife speeds
- 2 forward mixing speeds
- On request: 2 reverse mixing speeds
- 2 separate bowl speeds
- All drive systems with 3-phase motors

### Rasant

- 2 knife speeds
- 2 bowl speeds
- All drive systems with 3-phase motors

## Maschinenfabrik Seydelmann KG

info@seydelmann.com Tel. +49 (0)711 / 49 00 90-0 Hoelderlinstrasse 9  
www.seydelmann.com Fax +49 (0)711 / 49 00 90-90 70174 Stuttgart, Germany

**Cutters · Mixers · Grinders**  
**Emulsifiers · Production Lines**