
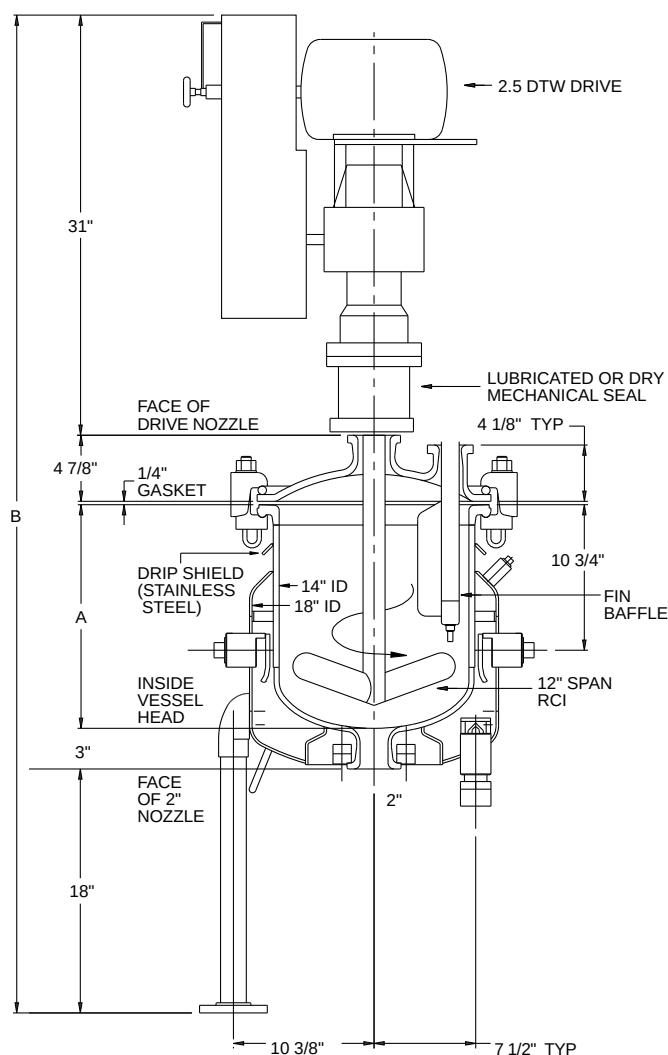


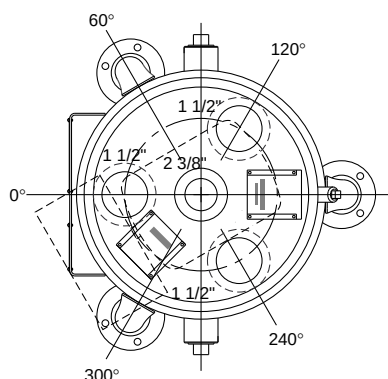

Capacity (gallon)

Working	5	10
Per Inch of S.S	.7	.7
Bottom Head	1.6	1.6
Top Head	.6	.6
To Bottom of Impeller	.5	.5
To Top of Impeller Blades	2.9	2.9
To Bottom of Baffle	3.5	3.5
To Face of Main Flange	5.3	10.2
Jacket	3.3	5.8

Heating (square feet)

Jacket	1.5	3.6
Bottom Head	1.2	1.2
Per Inch of S.S.	.3	.3

Design Pressure

Internal @ 450 F	150/FV	150/FV
Jacket @ 450 F	125/125	125/125

Steel Thickness (inches)

Inner Vessel

Top Head	.56	.56
Shell	.43	.43
Bottom Head	.37	.37

Jacket

Shell	.18	.18
Bottom Head	.18	.18

Weight (pounds)

Net-No Accessories	297	358
W/DTW Drive, Agit, Baffle	723	783
Add For Shipment	150	150

Dimensions

A	9.50	16.50
B	66.62	73.62