

## ACCUMULATING & UNSCRAMBLING TABLES



### Rugged, Durable, and Dependable

All-Fill's diverse product line includes a versatile range of rugged, adaptable rotary tables for use as either Accumulators or Unscramblers with filling, checkweighing, or other packaging line equipment. Tables come complete with durable steel housing, adjustable guide rail assemblies, rotating stainless steel platform, and internal, adjustable speed motors & controls ready for installation into new or existing production lines.

### CONFIGURATIONS FOR EVERY NEED.

Accumulator configurations are generally positioned with discharge conveyors to accept and arrange containers after filling, weighing, etc. Unscrambler configuration supplies and orients containers towards infeed devices and can include optional diverter arms and/or infeed tables for unassisted and trouble-free container movement.

Both configurations feature adjustable speed, direct drive rotation of table platforms for easy matching and variation of production equipment speed. Integral electronic motor controller provides easy, "dial-in" speed selection without time consuming belt or gearing changes.

Either configuration is specified by line height, table diameter (36, 48, or 60" diameters standard), rotation, and orientation (see reverse). Available options include: exterior finish, infeed/discharge tables, and/or additional diverters/guide rails.

36"/48"/60" Dia.

Adjustable Guide Rails

Stainless Steel Platforms

Direct Drive Motor and Controller

Removable Access Panel

25"

23"

(As Specified)

Infeed/Discharge Tables


20"

+/- 2" adj.


Height (+/- 2") Adjustable Feet

Dimensions listed for reference only. Do not use for layout.

## Accumulators

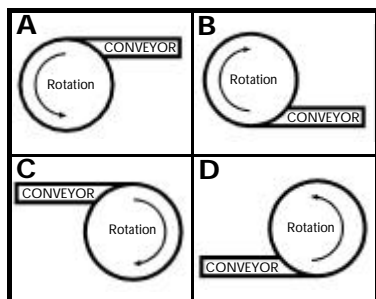

## Unscramblers

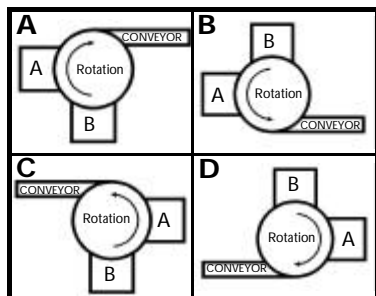

**Table Diameter:**       36"       48"       60"    
**Line Height:**               "        
**Container Type & Size:** \_\_\_\_\_  
                                 "   W x   "   H x   "   Dia.  
**Configuration** (see left):   A       B       C       D    
**Rotation:**               Counterclockwise       Clockwise    
**Exterior Finish:**       \_\_\_\_\_

<b>Table Diameter:</b>	<input type="checkbox"/> 36"	<input type="checkbox"/> 48"	<input type="checkbox"/> 60"
<b>Line Height:</b>	<input type="checkbox"/> "		
<b>Container Type &amp; Size:</b>	<input type="checkbox"/> " W x <input type="checkbox"/> " H x <input type="checkbox"/> " Dia.		
<b>Configuration</b> (see left):	<input type="checkbox"/> A	<input type="checkbox"/> B	<input type="checkbox"/> C <input type="checkbox"/> D
<b>Rotation:</b>	<input type="checkbox"/> Counterclockwise		<input type="checkbox"/> Clockwise
<b>Exterior Finish:</b>	<input type="checkbox"/>		

**All-Fill: For All Your Filling Needs.**

All-Fill, Inc. designs, manufactures, services, and supports a complete line of machinery for powder and liquid filling. Complementary equipment includes feeding and conveying of dry products for the food, pharmaceutical, and chemical industries, as well as high-speed checkweighing equipment sold under the Alpha Checkweighers brand.



**418 Creamery Way  
Exton, PA 19341 USA  
1-866-ALL-FILL  
Fax: (610) 524-7346  
www.all-fill.com**

