



Technology & Innovation
 Packaging Material & Valves
 Packaging Equipment
 Service
 Markets
 About Us
 Career Center
 Home


Model FSU101

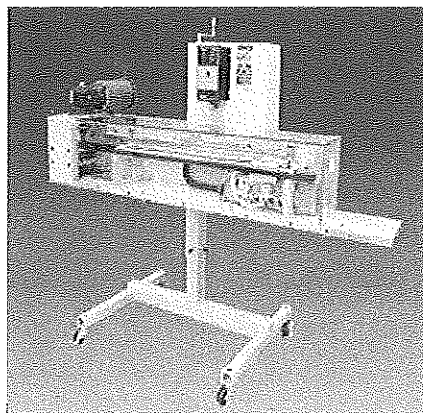


Elevation View



Plan View



Side View



FEATURES

- Output up to 16 bags/minute (optionally 25 bpm)
- Capable of sealing a wide variety of bags including; gusseted, pillow bags, and pouches made from foil or any plastic laminate.
- User-friendly controls.
- Comes equipped with heavy-duty casters making it portable.
- Adjustable seal pressure and dwell.
- Vortex Air-cooling station after the seal is complete.
- Requires very little maintenance.
- Adjustable height to conform to your application.

OPTIONALS

- Trim section to remove part of the upper flap
- Conversion kit to be able to run both Polyethylene and polyester outer layer bags.
- Leveling feet.
- Models can be built to feed bags from either the Right or Left. Label appliers

TECH INFORMATION

- Package sizes can weigh between 5 and 100 pounds.
- Individual temperature controls for each heater.
- Heater on/off switch.
- Micro Logics PLC controlled.
- 240vac single phase.
- Footprint of 40" x 87"
- Bag clearance height of approximately 24" up to 54"
- Safety interlock for guarding.

Fres-co System USA, Inc.

3005 State Road

Telford, PA 18969-1033

Phone: 215-721-4600

Fax: 215-721-4414

70080001