

Shanklin Automatic L-Sealer Model Specifications

	Model A-26A	Model A-27A	Model A-28A
Seal Size	16"W x 21"L	21"W x 33"L	31"W x 43"L
Max. Product Height	5 1/2"	8"	10"
Mln. Product Length	4" Standard 1 1/2" with optional closing conveyor	4" standard 2 3/4" with optional closing conveyor	7 1/2" standard 5" with optional closing conveyor
Max. Product Length	20"	31"	41"
Max. Film Width (Folded)	24"	30"	36"
Max. Film Width (Flat)	44" with compact centerfolder		60" with large compact centerfolder
Conveyor Height	Adjustable 31 1/2" – 37 1/2"		
Packaging Speeds*	Up to 35 packages per minute (standard)		25 packages per minute maximum
Longitudinal and Transverse Seal	Hot knife jaws or SmartWire		Hot knife jaws
Power	230V, 15 Amps, 60 Hz, 1 phase		
Compressed Air	0.5 C.F.M. free air at 60 psi		
Safety Devices	- Emergency stop button instantly stops all machine functions until manually reset - A transparent hood, interlocked electrically with the automatic sequencing circuit, covers the sealing area; gas cylinders support the hood when it is lifted to allow access - Film clamp proximity sensors ensure safe sealing arm jaw closure - Multiple safety interlocks - Tamper-resistant controls - Low voltage sensors and actuators		

*Dependent on product and application.


U.S. Patent Nos. R30,010; 4,219,988; 4,339,093; 4,419,855; 5,097,939; 5,131,213; 5,321,230; and pending.

Specifications on all machines subject to change without notice.

Some photos may show accessories not part of the basic machine.

USDA APPROVED MODELS AVAILABLE

A-26A/A-27A/A-28A Plan View

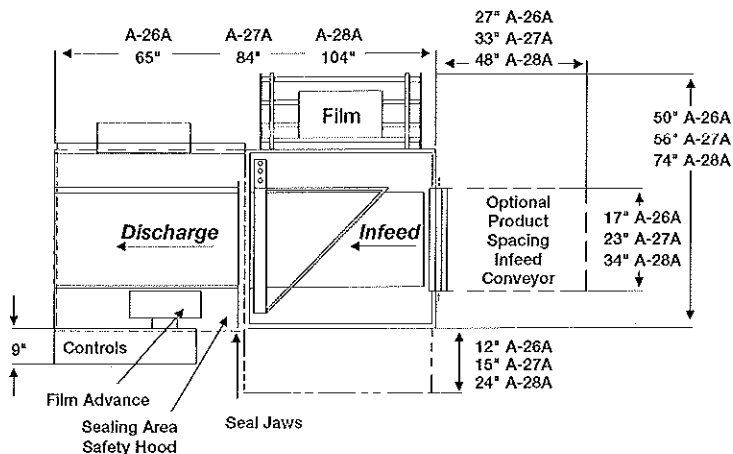

70083002