



Models T-8/T-9 Shrink Tunnel

All of the Excellent Durability and Performance of Our Shanklin T-7 Series...in a Larger Size



- **Expanded Capacity**—Produces superior shrinks on large and high profile packages.
- **Versatile**—Designed especially for sleeve-wrapped packages and large L-Sealed packages.
- **Rugged**—Built to last; stainless steel mesh conveyor belt standard.
- **Multiple Options**—Two large capacity models available in varying tunnel heights and widths to best meet your unique shrinking needs.
- **Two-Year Warranty**—A hallmark of our continued assurance of quality.


Sealed Air Corporation

Outstanding Shanklin Large Capacity Shrink Tunnels have been designed for your larger needs. Contact your Shanklin distributor to find out more.

Superior Shrinks...in a Big Way!

Shanklin T-8/T-9 Large Capacity Shrink Tunnels are specially designed for packages too large or wide to fit through our Shanklin T-7 Series tunnels. The T-9 is particularly effective for low-profile, wide product and/or bulky product. With two models and a variety of capacity dimensions to choose from, there's a Shanklin T-8 or T-9 perfect for your application.

T-8/T-9 Plan View

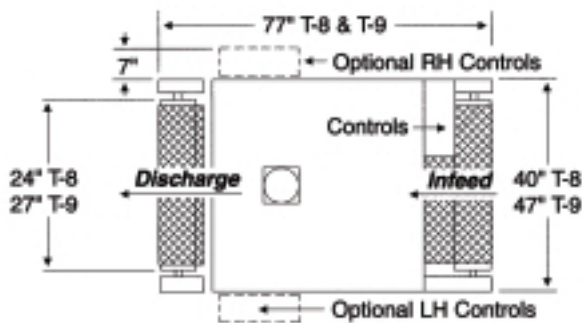

The Perfect Partner!

Partner your T-8 or T-9 Shanklin Shrink Tunnel with a Shanklin A-28A Automatic L-Sealer for a complete, dependable, quality shrink packaging solution.



Shanklin Model T-8/T-9 Specifications

	Model T-8	Model T-9
Tunnel passage	12" high x 28" wide 16" high or 20" high available	6" high x 36" wide 14" high or 20" high available
Conveyor length	77" long	77" long
Tunnel height above conveyor	(12" opening) 40"	(6" opening) 38"
Conveyor height	28" minimum, 40" maximum (Adjustable telescoping legs)	
Conveyor speed and type	Variable from 0 to 74 ft./min., mesh belt standard, live and dead roller available	
Blower motor	3/4 hp, single phase	1 1/2 hp, 3 phase
Heaters	Multiple finstrip (encased element) heaters	
Power	<i>(12" opening):</i> 230V, 3 phase, 50 amps, 21 KVA (460V, 3 phase, 32 amps, 21 KVA available) <i>(16" and 20" opening):</i> 230V, 3 phase, 69 amps, 29 KVA (460V, 3 phase, 35 amps, 29 KVA available)	<i>(6" opening):</i> 230V, 3 phase, 63 amps, 22 KVA (460V, 3 phase, 32 amps, 22 KVA available) <i>(14" and 20" opening):</i> 230V, 3 phase, 88 amps, 31 KVA (460V, 3 phase, 45 amps, 31 KVA available)
Controls	<ul style="list-style-type: none"> Precision-indicating controller calibrated 50° to 500° F Main power fused disconnect Tunnel control switch Conveyor control switch Conveyor variable speed control Variable air velocity control 	
Safety features	<ul style="list-style-type: none"> Motors overload protected High temperature limit switch Torque limiting clutch on conveyor 	

U.S. Patent No. 3,312,811

Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

Distributed by:



Shanklin

Sealed Air Corporation

100 Westford Road
Ayer, Massachusetts 01432
(978) 772-3200 Fax: (978) 772-5660
www.shanklincorp.com

CORPORATE OFFICES: Park 80 East, Saddle Brook, NJ 07663

INTERNATIONAL: Australia, Belgium, Brazil, Canada, China, England, Finland, France, Germany, Hong Kong, India, Italy, Japan, Korea, Malaysia, Mexico, Netherlands, New Zealand, Norway, Philippines, Poland, Singapore, Spain, Sweden, Taiwan, Thailand.

® Reg. U.S. Pat. Off. © Sealed Air Corporation 2003. Shanklin and the Shanklin logo are registered trademarks of the Shanklin Corporation. All Rights Reserved.