

Can Seaming & Manufacturing Machine



MODEL

60L



Rated Speed up to

500 CPM

- ▶ 6 Seaming Stations
- ▶ Change Parts for One Can Size
- ▶ Single Roll Cover Separator
- ▶ Gear Driven Lower Lifters with Seven Point Lubrication System
- ▶ Second Operation Off-Seam Setting
- ▶ Free-Standing Stainless Steel Machine Enclosure with Door Interlocks
- ▶ 24 Volt DC Controls
- ▶ Automatic Stop Control System
- ▶ Pneumatic No Can / No Cover
- ▶ Mechanical Variable Speed Motor Drive
- ▶ AC Inverter Drive (Optional)



Standard Features



Single Roll
Cover Separator



Tool Kit &
Instruction
Manual



Filler Connecting
Parts
(UCG Only)



Titanium Nitride-
Coated Chromium
Cobalt Seaming Rolls
(UCG Only)



Driven Lower
Lifters with
Seven Point
Lubrication

Optional Features



Under Cover
Gassing



Steam
Vacuum



Can
Manufacturing



Semi-automatic
Grease Lubrication



Ceramic
Seaming Roll
Bearings





Nickel Plated
Machine

Technical Specifications

No. of Seaming Stations	6	Nombre stations sertis.	Anzahl Verschlussstationen	Num. de Cabezas de Doble Cierre	6
Output Speed Range	175-500 CPM	Gamme vitesse poss.	Geschwindigkeitsbereich	Vol. de Producción	175-500 CPM
Min./Max. Can Diameter	200-404	Diam.boîte min./max.	Min./Max. Dosendurchm.	Diámetro Mín./Máx. del Envase	50.8mm - 108.0mm
Min./Max. Can Diameter (Optional)	112	Diam.boîte min./max. (Option.)	Min./Max. Dosendurchm. (Option)	Altura Mín./Máx. del Envase (Opcional)	44.5mm
Min./Max. Can Height (UCG & Atmos)	108-712	Hauteur boîte min./max. (Fabric. + Atmospher.)	Min./Max. Dosenhöhe (Dosenherst. + Atmosph.)	Altura Mín./Máx. del Envase (Mfg. - Atmosférico)	38.1mm - 336.6mm
Min./Max. Can Height (UCG & SV)	111-712	Hauteur boîte min./max. (Inj.gaz CO ₂ et vapeur)	Min./Max. Dosenhöhe (UCG + Bedampf.)	Altura Mín./Máx. del Envase (Con Dispositivo para Gasificación y Vacío al Vapor)	42.8mm - 196.9mm
Min. Can Height (UCG & Atmos - Optional)	108	Hauteur boîte min. (Fabric. + Atmospher. - Option)	Min. Dosenhöhe (Herst. + Atm. - Option.)	Altura Mín./Máx. del Envase (Mfg. - Atmosférico - Opcional)	38.1mm
Min. Can Height (UCG & SV - Optional)	107	Hauteur boîte min. (Inj.gaz CO ₂ & vapeur - Option)	Min. Dosenhöhe (UCG + Bedampf. - Option)	Altura Mín. del Envase (Con Dispositivo para Gasificación y Vacío al Vapor - Opcional)	36.5mm
Max. Can Height (Optional)	1300	Hauteur boîte min. (Option.)	Max. Dosenhöhe (Option)	Altura Máx. del Envase (Opcional)	330.2mm
Transfer Chain Pitch Can Centers	6.000"	Pas de chaîne transfert (distance entre boîtes)	Dosentransferketten-Teilung	Centros de la Cadena de Transferencia	152.4mm
Filler Drive	1 Rev/Can	Commande emboîteuse	Füllerantrieb	Transmisión de Llenadora	Direction Reversible
Horsepower/Electrical	7.5-10 Hp	Kw-Force élect.	Leistungsaufnahme in Kw	HP/Eléctrica	6-8 Kw
Electrical Controls	24 Volt DC	Commandes élect.	Elektrosteuerung	Control/Eléctrica	24 Volt DC
CO ₂ /Nitrogen Gas Supply Pressure	100 psi @ 70°	Pression Amen. Gaz CO ₂ ou azote	CO ₂ /Stickstoff Gas-zufuhrdruck	CO ₂ /Suministro de Presión de Gas Nitrogeno	6.9 bars @ 21° C
Net Weight (Approx.)	6,150 lbs	Poids Net (Approx.)	Nettogewicht (ca.)	Peso Neto (Aprox.)	2,790 Kg
Gross Weight (Approx.)	7,250 lbs	Poids Brut (Approx.)	Bruttogewicht (ca.)	Peso Bruto (Aprox.)	3,289 Kg

CANNERY

CAN SHOP

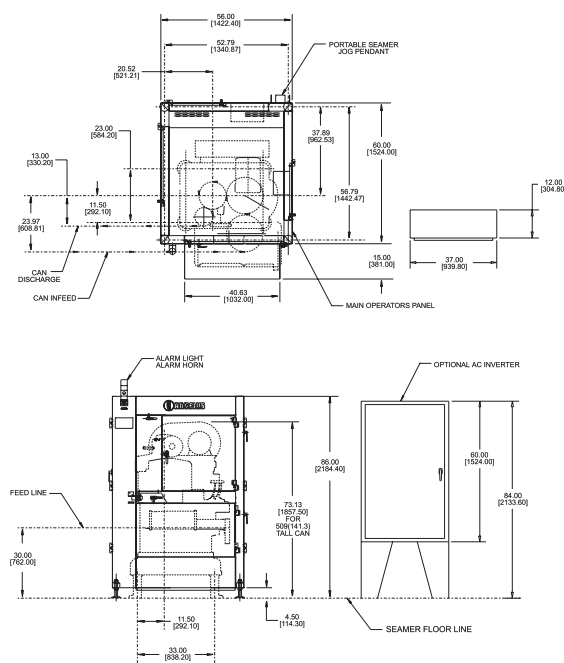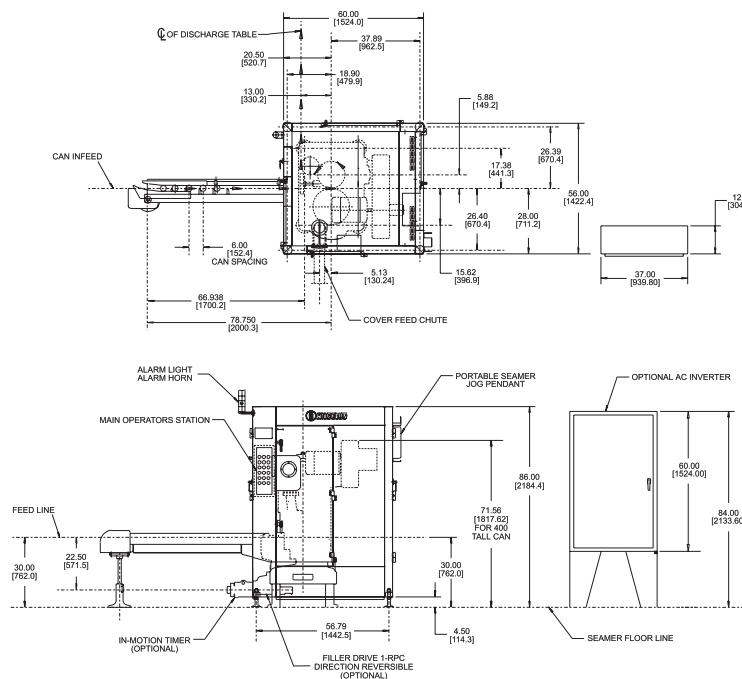

ANGELUS SANITARY CAN MACHINE COMPANY

4900 PACIFIC BOULEVARD, LOS ANGELES, CA 90058 (323) 583-2171 FAX: (323) 587-5607
WEB SITE: www.angelusmachine.com E-MAIL: angelus@angelusmachine.com

ANGELUS MACHINE CORPORATION INTERNATIONAL

BELGIUM OFFICE: BELCROWNLAAN 44, B-2100 DEURNE, BELGIUM (32) 3 327 3140 FAX: (32) 3 325 5633 E-MAIL: sales@angelusmachine.be
UK OFFICE: DE'SALIS DRIVE, HAMPTON LOVETT IND. EST., DROITWICH, WORCS. WR9 0QE, U.K.
44 (0) 1905 779602 FAX: 44 (0) 1905 771882 E-MAIL: sales@angelus-machine.co.uk