




# Case Sealer

## LD-3SB

### Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of uniform cases.

Little David delivers packaging equipment that works for you



Perfect for high profile, lightweight, unstable, narrow boxes



#### The LD-3SB offers:

- ☒ Low maintenance
- ☒ Quick changeover
- ☒ Proven side belt
- ☒ Simple operation
- ☒ Interchangeable tape cartridges
- ☒ Heavy duty steel construction
- ☒ Reliable operation

#### The LD-3SB replaces:

- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery

Little David LD-3SB



**LITTLE DAVID**




[www.loveshaw.com](http://www.loveshaw.com)

# LD-3SB

## Dimensions:

### LD-3SB:

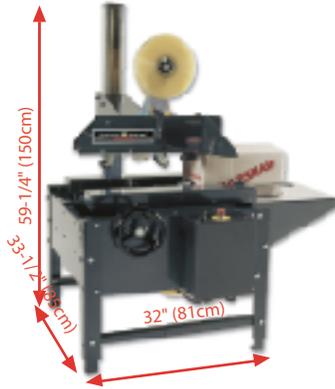

## Additional Case Sealer Models:

### Also Available Uniform Legend:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



### Also Available SP-304:

- Semi-automatic case sealer
- Seals top and bottom of uniform sized boxes



## Distributor Information:

## Features of the LD-3SB:

### Reliable Performance - Warranty:

- 2 Years Gear Reducer and motor
- 3 Years Cartridge\*

\*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

### Flexible:

- Tapes boxes from 4-1/2" (114mm) to 24" (610mm) in height
- Uses pressure sensitive tape

### Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST® tape cartridge requires no lubrication
- Self-centering belts

### Safe:

- Single mast design allows clear access
- Knife guard system of the CaseLocker ST® tape cartridge only allows the blade to be exposed only when the rollers have been depressed

## Specifications of the LD-3SB:

### Power Requirements:

- 110 VAC, single phase, 60 cycle

Note: Other voltages available. Contact Loveshaw for details.

### Operating Speed:

- Continuous belt drive; 72' per minute (21.9 m/min.)  
(production rate depends on box size & operator dexterity)

### Weight:

- 230 lbs (104 kg) uncrated

### Case Capacity: (with 2" wide CaseLocker ST® Cartridge)

- |                        |                      |
|------------------------|----------------------|
| ■ Minimum:             | Maximum:             |
| Height: 4-1/2" (114mm) | Height: 24" (610mm)* |
| Width: 4" (102mm)      | Width: 20" (508mm)   |
| Length: 3" (76mm)      | Length: infinite     |
- \*High mast version accommodates box heights to 34" (864mm)

## Options of the LD-3SB:

- Casters
- Leg adjustments
- High mast for box heights to 34" (864mm)
- Front and rear standard or roller pack table
- NEMA 4, NEMA 7
- Stainless steel
- 3-1/4" narrow box width option available

**LOVESHAW**  
an ITW Company

Route 296, Box 83  
South Canaan, PA 18459  
Tel: (570) 937-4921 Fax: (570) 937-3229  
(800) 572-3434

**LOVESHAW Europe**  
A Division of ITW Ltd.

Unit 9 Brunel Gate  
West Portway Industrial Estate  
Andover, Hampshire England SP 10 3 SL  
Tel: (1264) 357511 Fax: (1264) 355964

