

Step-Saver® Systems Economical and Efficient



Controller	8450	355	UC-ST	UC-CW DD	8361	UC-PW
Keyboard	Tactile	Tactile	Touchscreen	Touchscreen	Touchscreen	Touchscreen
Programmable Presets	48 Keys	48 Keys	350	Unlimited	1400	Unlimited
COOL Capability	No	No	Yes	Yes	Yes	Yes
NutriFacts/ SafeHandling	Yes	Yes	Yes	Yes	Yes	Yes
Display	Vacuum Florescent	Vacuum Florescent	Monochrome LCD	Color LCD	Monochrome LCD	Color LCD
Operating Range	32°F to 104°F 0°C to 40°C	32°F to 104°F 0°C to 40°C	41°F to 104°F 5°C to 40°C	41°F to 104°F 5°C to 40°C	41°F to 104°F 5°C to 40°C	41°F to 104°F 5°C to 40°C
Label Capacity	Standard	High Capacity	Standard	Standard	High Capacity	High Capacity
Label Sizes	1 to 7.9 in long and 1.6 (40mm) to 3.4 in (86mm) wide					
Controller Construction	Die cast alu- minum base, plastic case	Stainless steel enclosure	Die cast aluminum	Die cast aluminum	Die cast aluminum base, plastic case	Epoxy Coated Steel
Film Capacity	Three Rolls up to 20 in / 50.8 cm wide					
Film Type	PVC Stretch					
Bottom Seal	Thermostat Controlled Sealing Plate					
Film Cutting	Thermostat Controlled Low Temp Rod					
StepSaver® Power	115 VAC, 60 Hz, 10A, 625 watts (excluding scale and printer)					
StepSaver® Construction	Stainless Steel					
Scale Capacity	50 x .01 lb or 20 x .005 kg					
Options	Stainless steel 12 x 24 in platter shelf (left-right), label dispenser rack					



Manufactured in
a facility that is
ISO9001 certified.




METTLER TOLEDO

Mettler-Toledo USA
1900 Polaris Parkway
Columbus, Ohio 43240
TEL. (800) 523-5123
(614) 438-4511

Mettler-Toledo, Canada
TEL. (800) 263-6593

Mettler-Toledo S.A., Mexico
TEL. 52 55 5547 1634

RT1172.4E

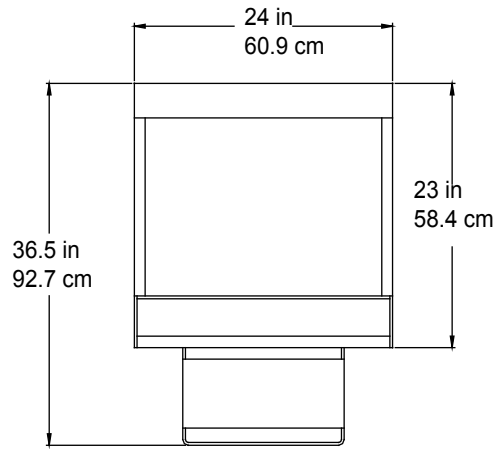

Power Requirements

Model 662 Step-Saver (only)
115 VAC, 60 Hz, 625 Watts
(not including scale and printer)

