
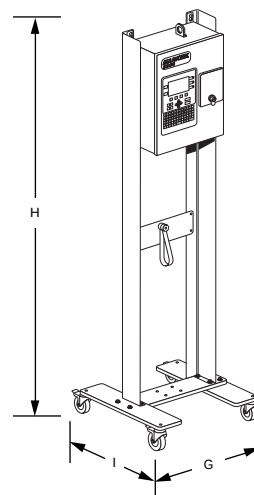
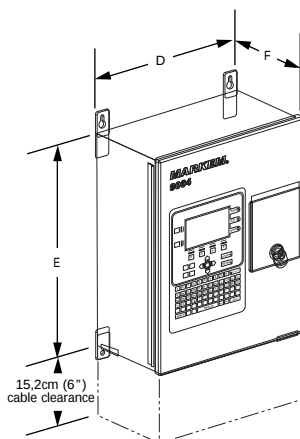


MARKEM 9064 AND 9096S INK JET CODERS

Easier and cleaner than conventional ink jet printers.

The MARKEM 9064 and 9096S ink jet coders uniquely combine simplicity and performance. These small character, digital package coders feature an easy-to-use control panel and user-friendly software. They use our proprietary solid TouchDry® ink blocks, which are clean, solvent-free and non-toxic.

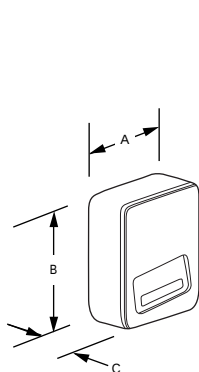

	A	B	C	D	E	F	G	H	I
CM	13	17	9	36,3	46,5	20	58,4	165	56,5
INCHES	5.2	6.8	3.6	14.5	18.6	8	23	65	22.3

Surface Speed:

208m/min (680ft/min) – density 1
104m/min (340ft/min) – density 2
52m/min (170ft/min) – density 3
26m/min (85ft/min) – density 4

Message Specifications:

Print height up to 25.4mm (1")
Message length up to 356mm (14")
Store up to 50 messages standard
Up to 8 lines of text standard
Multiple time & date formats and user-defined shift codes standard
Sequential numbering standard
News Gothic: 12, 16, 20, 21, 24, 32, 48, 64
News Gothic Bold 16, 21, 24, 32, 48, 96
News Gothic Bold Condensed: 12, 16, 20
True Fonts: 12, 16, 24, 32, 96
Messages may be inverted, offset or placed in multiple orientations
Rotated print (90°, 180° and 270°) optional
Graphics downloaded through use of optional Composer™ software or stored in an optional EPROM
Barcodes: Interleaved 2 of 5, Code 39, Code 128, EAN 13 and UPC A

Sensors:

Encoder controlled printing standard
Film and carton package sensors, proximity switch or pigtail cable standard

Electrical and Environmental:

115/230V, 50-60Hz or 100/200V, 50-60Hz; 850 watts
9096S: IP65 protection standard
9064: IP43 protection standard
Operating environment of 4° to 37°C (40° to 100°F)
Noise level not to exceed 55dB(A)
ETL listed conforms to UL STD 1950
Certified to CAN/CSA STD C22.2 No. 950
No external air required

User and Computer Interface:

Extended membrane keypad with multi-language support standard
240 x 128 pixel backlit LCD graphics display standard
Intuitive multi-language menu-driven software standard
RS232/485 serial interface selectable from 300 to 19,200 baud standard
Network up to 31 units using optional CimControl® software

Supplies:

Solid TouchDry® ink blocks in blue and black
TouchDry printhead wipes

Printhead:

96 jets with convenient push-button maintenance and print test control
Single umbilical with quick disconnect in 2m (6.5ft) or 4m (13ft) lengths

Weight (approximate):

Printhead – 1,9kg (4lbs 3oz)
Control box – 30kg (66lbs)

Patents:

US 5,489,925; UK 2,297,725; 2,297,726
Other patents pending

Specifications and other technical information are subject to change without notice. The information contained herein is based on testing using MARKEM supplies, software and parts. Test conditions may vary from end use. The exclusive warranty on MARKEM products is set forth in the MARKEM standard warranty. The user should test to determine suitability for an intended use.

MARKEM

www.markem.com

**AUTHORIZED
MARKEM
DISTRIBUTOR:**

LOGOKOD d.o.o. • Padine
15 10 090 Zagreb • Croatia
Phone: (+385) 1 3454135 •
Fax: (+385) 1 3460848 •
Email: logokod@zg.t-com.hr
• www.logokod.hr

MARKEM Continental Europe b.v., Nesland 3, Postbus 178, 1380 AD, Weesp, The Netherlands • Tel. +31 294 460460
• Fax +31 294 460466 • www.markem.nl • **MARKEM HEADQUARTERS** 150 Congress Street, PO Box 2100 • Keene, NH
03431 USA • Tel. +1 603-352-1130 • Fax +1 603-357-1835 www.markem.com • **MARKEM BUSINESS CENTERS:** Belgium,
Brazil, Canada, China, France, Germany, Italy, Japan, Malaysia, Mexico, Netherlands, Philippines, Singapore, Spain,
Switzerland, United Kingdom, Uruguay • **DISTRIBUTORS:** Africa, Asia, Australia, Central America, Europe, Far East,
Middle East, South America. ©MARKEM Corporation 1871432 Rev. 00 • Printed in the Netherlands (12/04)

