


Portable Hot Air Bag Sealers

Model 500


Heavy Duty industrial hot air sealer for bags up to 8 mils in thickness. Rugged knurling wheels provide positive seals in the most demanding applications. Standard DC variable speed control matches sealer and conveyor speeds. Its tough, all steel construction holds up to most industrial environments. Can be stand alone or integrated into a packaging line.

Standard Features:

- Heavy Duty 1/2 HP motor
- DC Variable speed control
- Right to left feed direction
- Air pressure detector
- Automatic heater burnout detector
- Digital temperature control
- Adjustable height
- U.L. approved 

Options:

- Locking Casters
- Double Seal
- Extra Heat
- Date Coder
- Seal Cooling
- Left to right feed

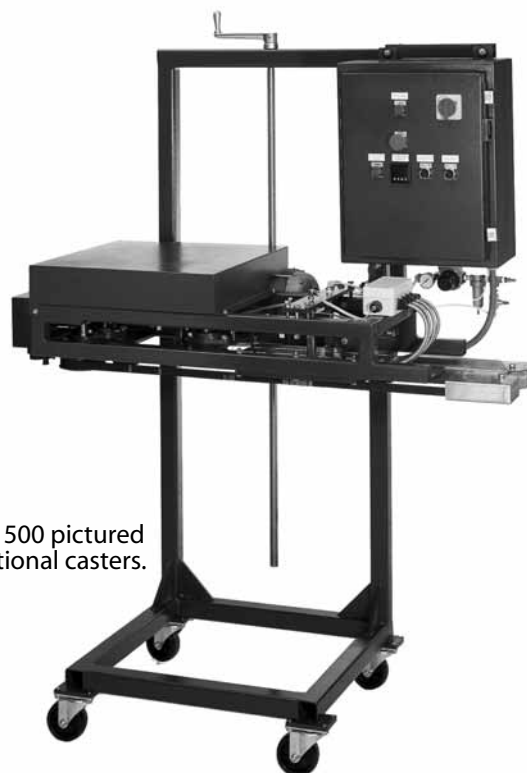


Model 500 pictured
w/ optional casters.

Model 1000


A unique hot air sealer produces a high quality "band type" seal on light mil bags (1.5–5mil). Perfect for ice, frozen foods, fresh foods, pet treats, birdseed, and other consumer packaging needs. DC variable speed control matches sealer to conveyor speed quickly and easily. Manufactured out of non-corrosive materials for use in damp or cold applications. Can be stand alone or integrated into a packaging line.

Standard Features:

- 1/4 HP gear motor
- DC Variable speed control
- Air pressure detector
- Automatic heater burnout detector
- Digital temperature control
- Right to left feed direction
- Adjustable height
- Locking casters
- U.L. approved 

Options:

- Rotary Bag Top Trimmer
- Upright bag conveyor
- Date Coder

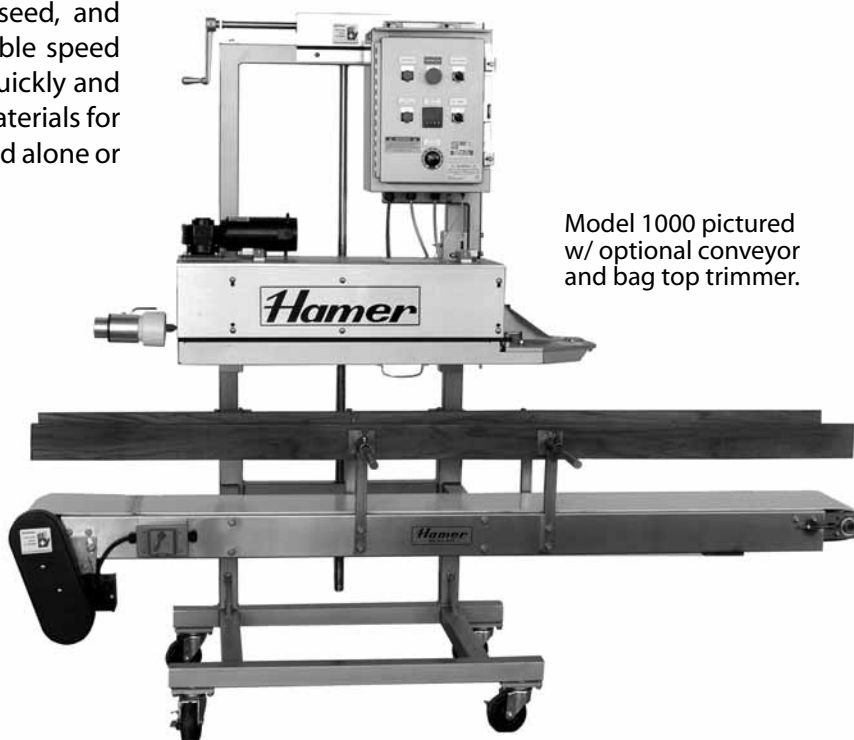

Model 1000 pictured
w/ optional conveyor
and bag top trimmer.

Hamer LLC


AUTOMATED PACKAGING SYSTEMS

800-927-4674 • www.hamerinc.com

14650 28th Ave N. • Plymouth, MN 55447-4821 • Tel: 763-231-0100 • Fax: 763-231-0101 • E-mail: packaging@hamerinc.com

Model 500




Machine Specifications:

Operating Temp: Above 34° F
Air: 3.0 cfm @ 5 PSI
Electrical: 230 V/1 phase
60 Hz/23amps* 

*amps and air will change with options

Bag Specifications


- Supports a wide range of sizes and materials
- Mil Thickness: 2 mil to 8 mil
- Pillow Style Bags Only

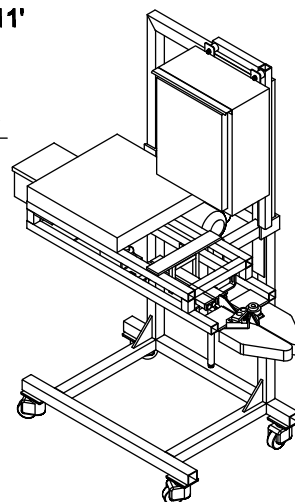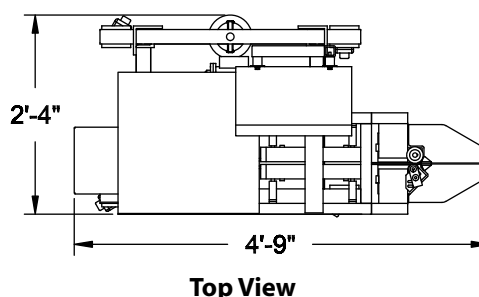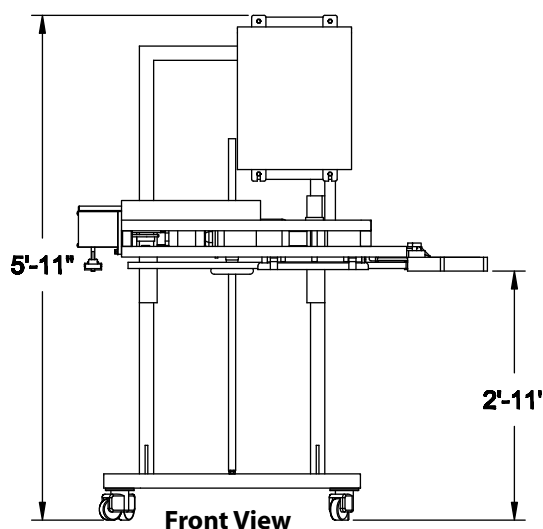

Specifications are subject to change without notice.

Model 1000




Machine Specifications:

Operating Temp: Above 34° F
Air: 3.0 cfm @ 5 PSI
Electrical: 120 V/1 phase
60 Hz/11amps* 

*amps and air will change with options

Bag Specifications

- Supports a wide range of sizes and materials
- Mil Thickness: 1.5 mil to 4 mil
- Pillow Style Bags Only

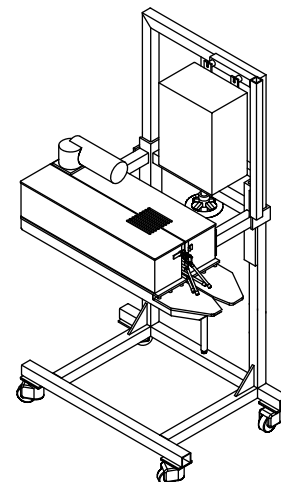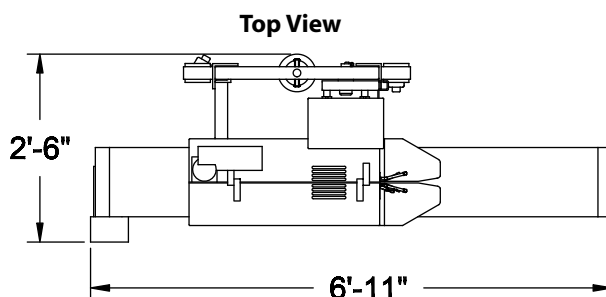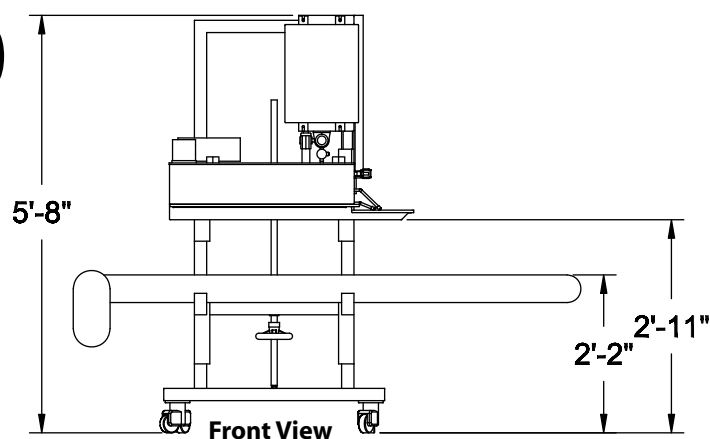

Specifications are subject to change without notice.

Hamer LLC

AUTOMATED PACKAGING SYSTEMS

Published 09/2007, revision 2

800-927-4674 • www.hamerinc.com

14650 28th Ave N. • Plymouth, MN 55447-4821 • Tel: 763-231-0100 • Fax: 763-231-0101 • E-mail: packaging@hamerinc.com