




Packaging made in Italy

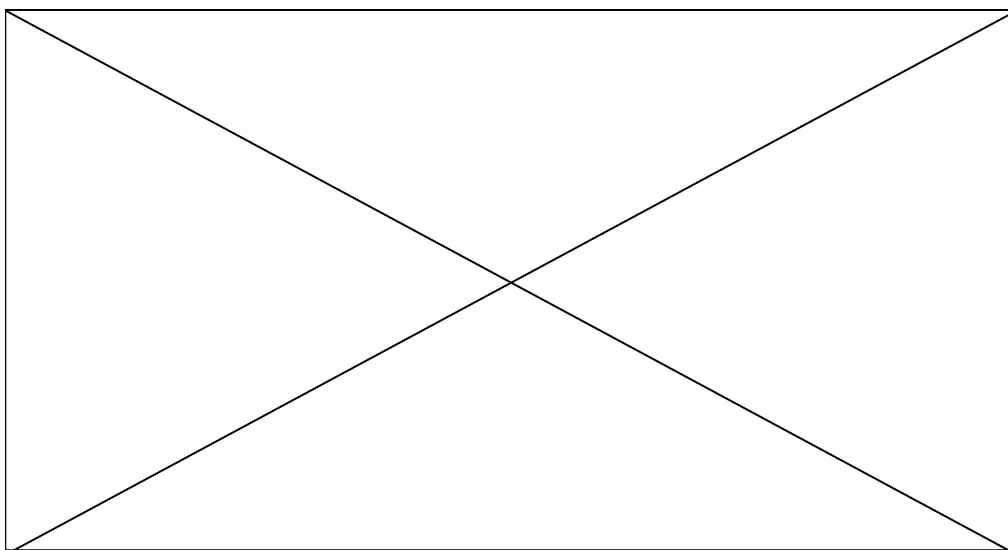

Stretch- Shrink Wrapping Machine F40

Machine suitable to bundle the product using a stretchable or shrinkable film.

The F 40 is a high productive machine.

MAIN FEATURES

Reliability

Its original functioning criterion, along with its simple manufacturing concepts, are particularly appreciated by its users. The F 40 adopts the most up-to-date manufacturing technologies.

Accuracy in bundling

The film is unwound by two motorized reels, which keep a steady tension and can be adjusted according to the customer's need. The product is bundled without being pushed against the film.

Easy use

Setting of main data (e.g. size, dimensions and speed) is performed through an operator's functional display . Easy and fast size changeover.

Packaging materials

The F 40 can work polyethylene, stretchable film either for banding or shrinking.

Types of packaging

It is suitable to carry out various packaging solutions - stretch-banded or overwrapped and shrunk - as well as a wide range of bundle patterns.

Different models of the F 40 are available to meet the most various customers' demands.

F 43

The F 43 model has been conceived to answer the requirements for fastest type of packaging. The tried-out mechanics of the F40 has been improved by a patented device. On its returning stroke, the pusher clears the stacking area and carries on its operations, avoiding useless pauses during the cycle of production.

Advantages:

Higher speed, while keeping the right time for sealing and cooling operations.

Much more time to collate the bundle; no pre-stacking are carried out.

Shorter pushing stroke with reduced acceleration: soft and "guided" contact of the product against the film.

High rate of productivity, thanks to the machine complete mechanical movements.

Film reel with expanding shaft for easy size changeover.

Accessible inside of the hopper. Easy check through the opening of its lateral guard. Operator's functional display for size changeover data and easier setting of machine main parameters.

Different types of products and collations can be handled both with a F 40 and a F 43.

The designing solutions are always tailored to the customer's demands.

TECHNICAL DATA

Mod.40 - Speed up to 30 bundles/min.

Mod.43 - Speed up to 45 bundles/min.

Rated Power 2 Kw

Absorbed Power 1,5 Kwh

Compressed Air Consumption 50-100 Nl/min. 6bar

Weight 550 Kg

Mod. 40.....Mod. 43

A = 30 - 350 mm - A = 30 - 350 mm

B = 12 - 200 mm - B = 12- 200 mm

C = 50 - 300 mm - C = 50 - 200 mm

Performance is dependant on the characteristics of the product, and the type of package.

