## PH Series





With sleeve (bullseye) wrap packaging

Uses a motorized pusher assembly

Transfers product to the wrapping/sealing section

Gates, barriers and decompression plates

Alleviate "back pressure" induced problems when running flexible products

Collation assemblies

Divide, reorient, rotate, upend, multi-row or stack product as required

- Inline or side infeed
- Self monitoring diagnostics available
- Production speeds

Up to 30 wraps per minute single lane, 50 per minute in dual lane

Stabilizing modules and guides

Facilitate feeding of unstable products










innovation in packaging equipment

## PH Series

Model Shown: PH-24L

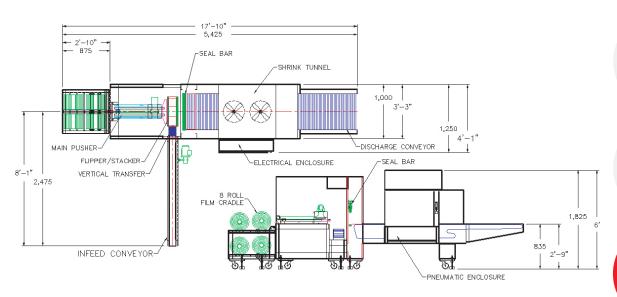

## Equipment Benefits

- Heavy gauge, stainless steel construction provides strength, rigidity, cleanliness and minimal maintenance
- Self-leveling, Teflon® coated, hot knife seal bar
- Polycarbonate enclosures ensure safety and provide for quick access
- Engineered as a complete unit with a double insulated tunnel that reduces energy consumption
- PLC with touchscreen interface
- Quick changeovers
- Stainless steel, solid rod tunnel conveyors, free of belts or coatings

ELECTRICAL ENGLOSORE

## **Corporate Headquarters**

3301 Gateway Centre Blvd. | Pinellas Park, FL 33782 Tel: 727.578.5000 | Fax: 727.578.1300 Web: www.polypack.com | Email: info@polypack.com





innovation
in packaging

equipment