

MODEL WF-2T

Automatic Case Former



FULLY AUTOMATIC CASE FORMER WITH TAPE CLOSURE SYSTEM

WEXXAR's Model WF-2T fully automatic case former with tape closure introduces a new level of refinement and performance with an efficient design built to WEXXAR's renowned standard of quality. Versatile, reliable and built for sustained high speed applications, this operator friendly machine will handle your most demanding packaging needs. Equipped with dependable, proven technologies including WEXXAR's patented Pin and Dome case opening system, this remote demand controlled machine will continuously and effortlessly open and form your R.S.C. or H.S.C. cases. Consult your factory representative regarding optional case style capabilities, as well as all the other features and options that set the WF-2T apart from its competition.

The WF-2T — a superb addition to the WEXXAR product line — famous for quality, reliability and unparalleled uptime efficiency.

- Production speed of up to 30 cases per minute, designed and built for sustained high speed industrial applications
- Advanced fully interlocked safety guarding allows easy access for service
- Design allows for safe, easy and quick size changeover – approx. 10 minutes
- Easy to maintain, uses the highest quality commercially available components and backed by WEXXAR's experienced, nationwide service team
- Corrosion resistant construction, complete wash-down options are also available



PIN & DOME OPENING SYSTEM

Vacuum free case opening is accomplished utilizing Wexxar's patented "Pin and Dome" technology. With precision and reliability unmatched by any other system, each case is mechanically captured and positively squared regardless of corrugated quality



GAP FREE CLOSURE

Major flaps are aligned and tightly butted during folding and sealing to produce gap free case bottom closure





MODEL WF-2T

FULLY AUTOMATIC CASE FORMER
WITH TAPE CLOSURE SYSTEM

STANDARD FEATURES

SAFETY GUARDING ■ Advanced integrated safety guarding with keyed interlock switches

- FEATURES**
- Efficient in-line design
 - Fully automatic including Remote Demand Control, requiring minimal operator interaction
 - No vacuum: WEXXAR patented 'pin and dome' case opening technology
 - High capacity case feed magazine with positive case separation system
 - Positive case squaring
 - Cases formed and delivered in fully upright position
 - Broad case size range
 - Easy set up, operation and care
 - Available in left or right hand construction

CONSTRUCTION ■ Anodized aluminum, stainless steel and plated steel, corrosion resistant construction

OPERATING LEVEL ■ Discharge height at 27 inches (685 mm)
■ Case magazine height at 33 inches (838 mm)

- CONTROLS**
- NEMA 12 UL/ULC listed standard electrical control and/or CSA
 - Meets N.E.P.A.-79 recommendations
 - 24-volt DC power supply for safe, low voltage operating controls
 - Allen Bradley PLC and Control components
 - Lock-out / tag-out compliant on electrical & pneumatic main shut-offs
 - Optional CE

POWER ■ Requires 230VAC, 3 Phase, 60Hz, 1.5kW or 460VAC, 3 Phase, 60Hz, .75 KW (other voltages available)

AIR ■ Requires 0.3 cu.ft. (8.5L) per cycle at 90 p.s.i. (6 bar)

TAPE SYSTEM ■ DEKKA stainless steel tape applicator head

MAIN CONVEYOR ■ Uni-Drive (1/2 hp) case transport with 3" compliant side belts

OPERATING SPEED ■ Up to 30 cases per minute

SIZE CHANGE TIME ■ Case size change-over in approximately 10 minutes


CASE STYLES ■ R.S.C., H.S.C. or optional C.S.S.C.
Consult with factory representative for other styles

WEIGHT ■ Approximate Shipping Weight 2,100 lbs./953 KG

CASE SIZE RANGE ■ Standard case size range. Consult with factory representative regarding oversize and undersize capabilities

	L		W		H
Min.	7" (178mm)	x	5" (127mm)	x	5" (127mm)
Max.	24" (610mm)	x	17" (432mm)	x	16" (407mm)

Specifications are subject to change without notice

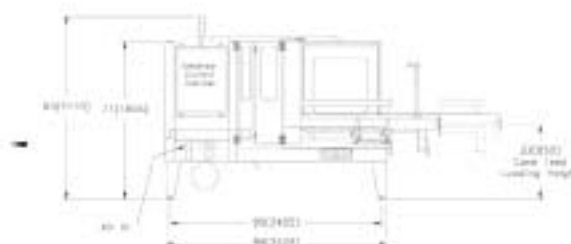

WEXXAR PACKAGING INC.

10101 Nordel Court, Delta, British Columbia, Canada V4G 1J8 Tel: (604) 930-9300 Fax: (604) 930-9368

e-mail: sales@wexxar.com www.wexxar.com

Sales offices throughout the United States and Canada

a Pro Mach Operating Partner