

Item # MTC HLC-2, Column Dumper

Price QUOTE


MTC's Column Dumpers are known for their quality construction, featuring an all stainless steel exterior, fast and safe operation, and the cleanest designs available. When it comes to dumpers, industry comes to the Dumper Specialists at MTC. Utilizing years of experience, our systems engineers have the knowledge and understanding to design dumpers and dumping systems that combine efficiency and dependability for your specific application. Numerous options provide the flexibility you need, from portability to powered travel, special hold downs, liners, and chutes.

There's no better way to dump product than with the HLC-2, the original Column Dumper. For more than 25 years, the meat processing industry has used the HLC-2 in many applications to dump 400 lb. and 600 lb. capacity kitchen carts. This is a high-quality and economical alternative to the methods you're now using.

Specifications subject to change without notification. Contact us about blenders, screw and belt conveyors, processing systems design and special applications.



[larger image](#)

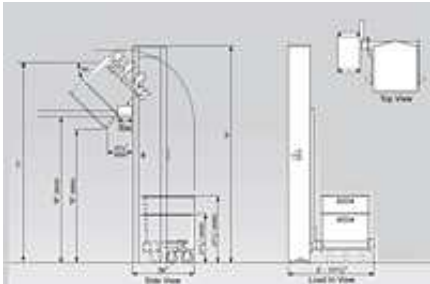

[larger image](#)

[Specifications](#) · [Standard Features](#) · [Options](#)

Specifications

Cart Capacity	400 lb
A	10 ft
B - Discharge Height	90.00 in
C	11 ft
Discharge Angle	45 °
Discharge Height	to 90 in
Configuration	Left Hand Right Hand

## Features

- All stainless steel exterior
- Hinged access door
- Anti-drop safety mechanism
- Complete electrical, including starter
- Mechanical and electrical components totally enclosed

## Benefits

- Assures long life and easy of sanitation
- Provides for easy maintenance and cleaning
- Prevents carriage from falling in event of lift chain failure
- Easy to install and ready to operate
- Reduces maintenance costs and increases component life

---

## Standard Features

- 800 lb. capacity
- Sanitary design hinged door
- Easy access to all components
- Positive chain lift and return
- Chain lift with direct drive motor / reducer
- 1 1/2 hp. gear motor with brake
- Primary voltage (208-230/460 volts)
- Control voltage (120 volts)
- Floor level loading
- Safety drop lock

---

## Options

- Special carriages for barrels, drums, carts, boxes, totes, plastic containers or combinations
- 1000 lb. capability
- Special discharge heights to 20'
- Barrel staging conveyor
- Explosion proof electrical
- Powered traveling base for portable unit
- Air operated unit

[Print](#)

[Back](#)