




- ▶ Case forming, loading and sealing on a single machine
- ▶ Fully accessible machine
- ▶ Increased mechanical performance
- ▶ Compact and ergonomic design at each station


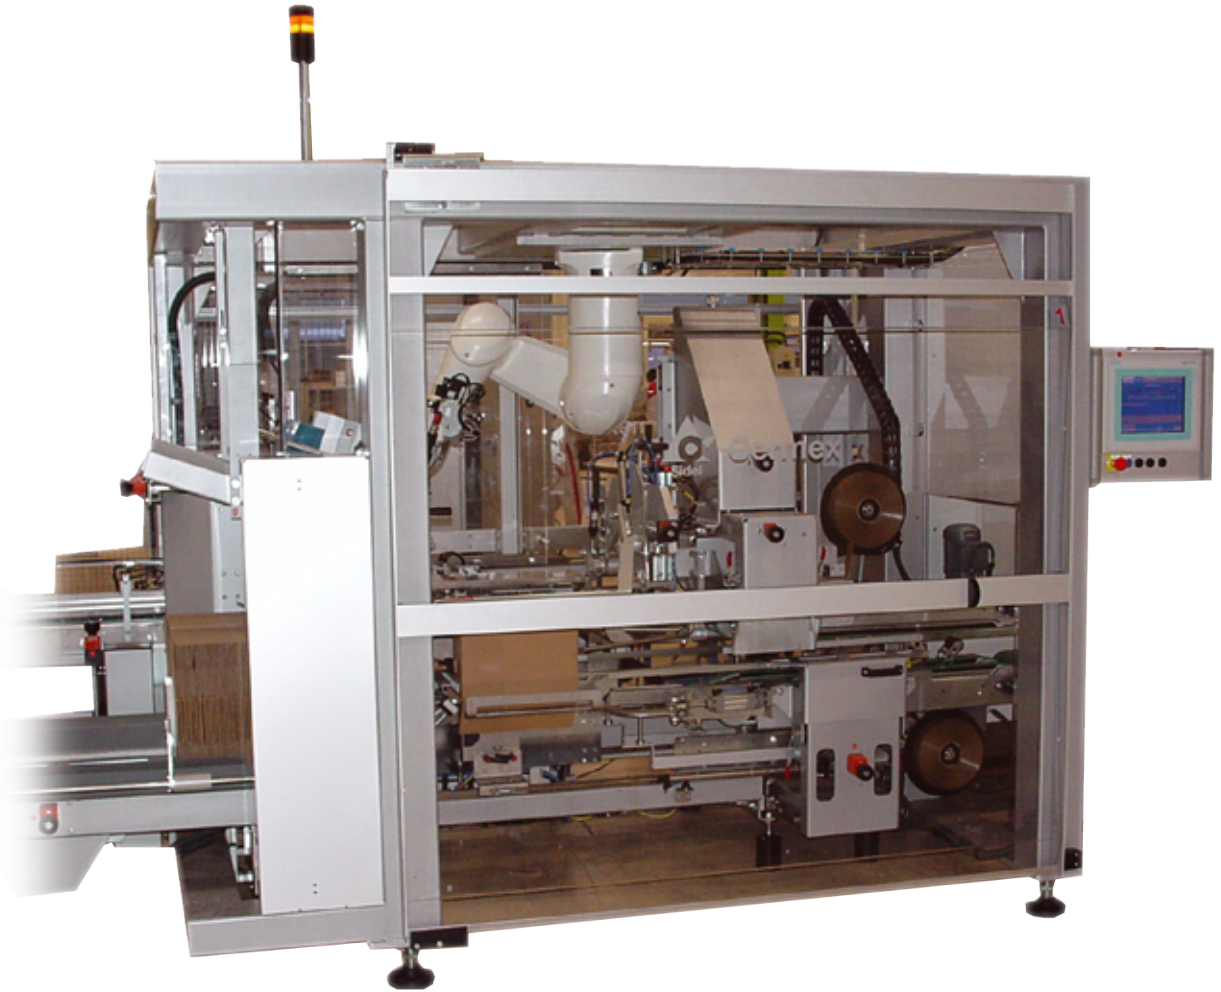


Your products are in good hands

S D

Top Loading Case Packer
with Combined Functions

- 1 ▶ High speed infeed
- 2 ▶ Lock chamber infeed
- 3 ▶ Extraction
- 4 ▶ Case loading
- 5 ▶ Loading gantry
- 6 ▶ 6-axis loading
- 7 ▶ Loading of Shelf-Ready Packaging
- 8 ▶ Gluing/pressing

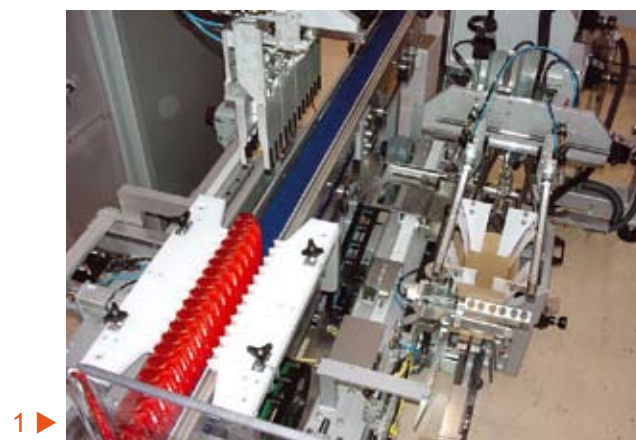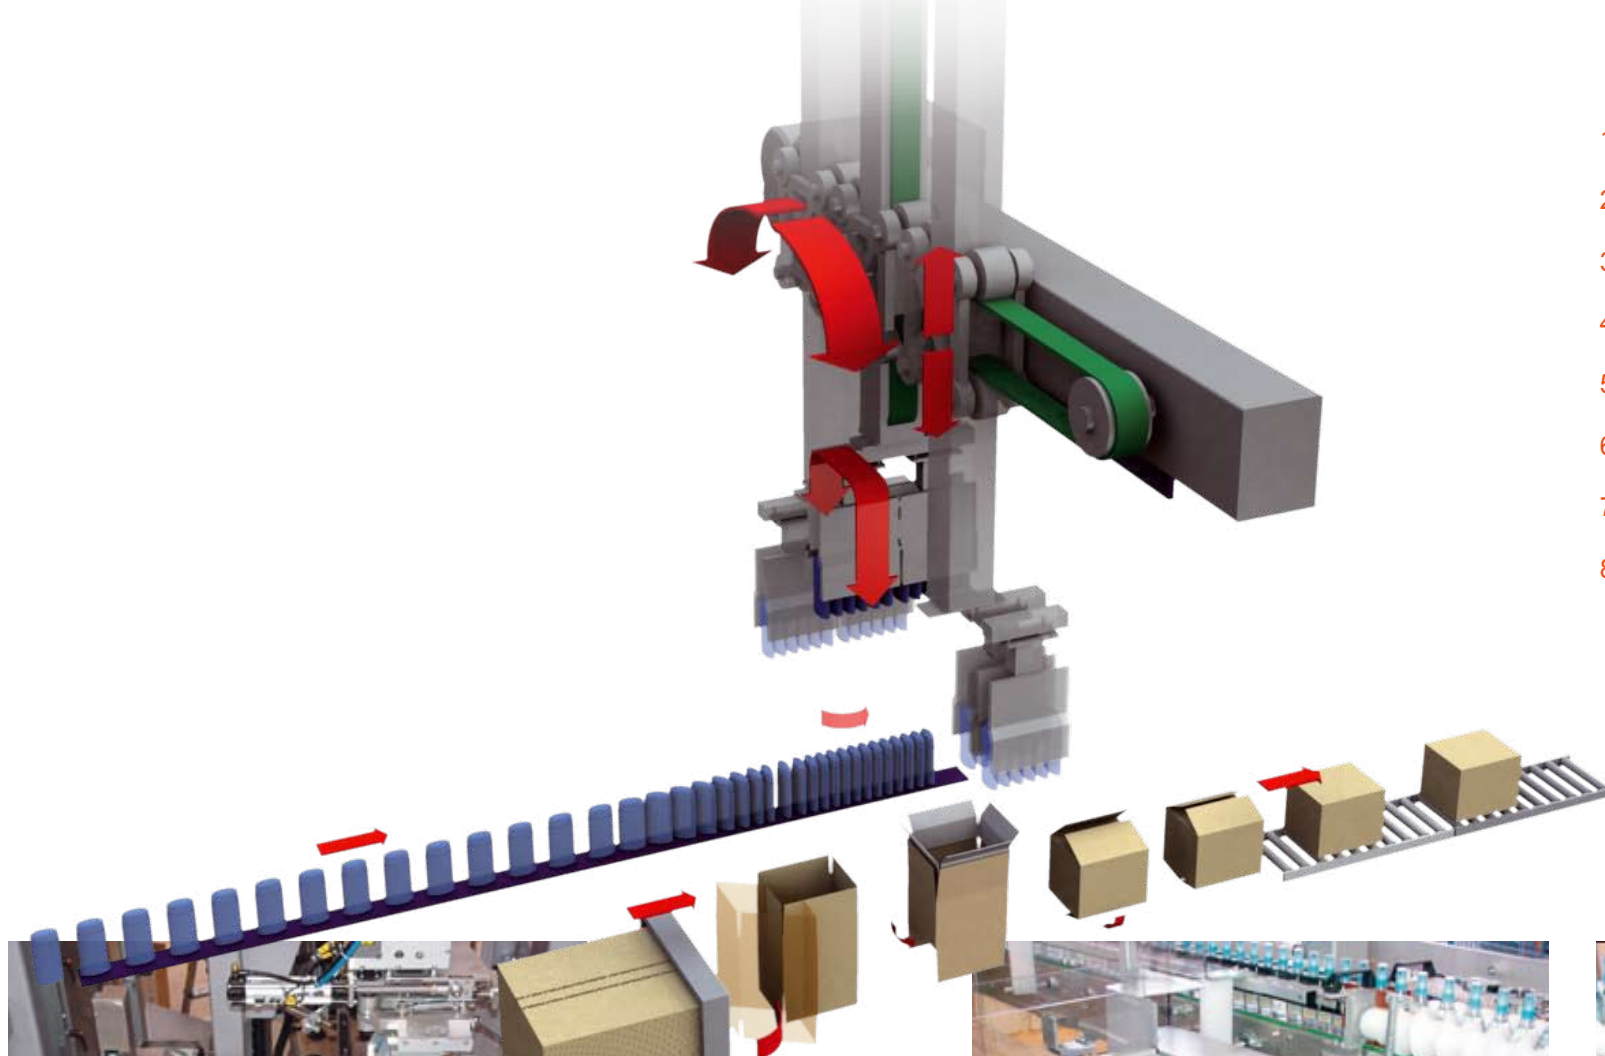

1 ▶



2 ▶



3 ▶




4 ▶



5 ▶



6 ▶

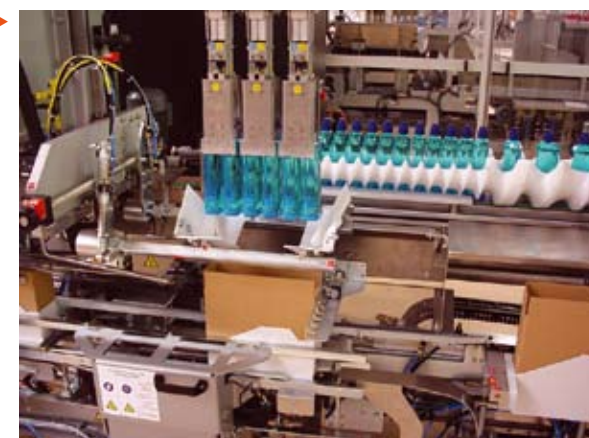

7 ▶



8 ▶

A top loading solution to meet your specific requirements:

► TECHNICAL CHARACTERISTICS

- > Low case magazine positioned parallel to the product infeed, making the machine even more compact and ergonomic
- > Separate case extraction, forming and transfer modules to improve case quality and squaring

► ADVANTAGES

- > Cantilever design of the case transfer mechanism for direct access into the machine at floor level
- > New generation of numerical axes for loading (support mast and case driving system) designed to reach higher speeds and guarantee smooth and controlled movements
- > Case outfeed optimised in order to reduce the machine footprint
- > Quick size changeovers

► PERFORMANCE

- > Innovative design incorporating sliding safety guards
- > Payload: up to 55 kg with tooling depending on products and loading stroke
- > Speed: up to 28.5 cases per minute depending on the type of products and collations
- > Product and case size ranges available on request
- > Option: product and batch control by vision system

SD69.2

	Speed	Case Length		Case Width	Case Height	L+B	Handling
		L	W		H		
Adhesive tape	20 c/min	Min	200	160	130	360	Numerical axes
		Max	240	220	230	440	
Hot melt glue	23 c/min	Min	120	100	150	220	
		Max	270	310	280	260	

SD69.4

	Speed	Case Length		Case Width	Case Height	L+B	Handling
			L	W	H		
Adhesive tape	20 c/min	Min	200	160	130	360	Numerical axes
		Max	250	310	280	620	
Hot melt glue	23 c/min	Min	120	100	150	220	
		Max	350	310	280	260	

SD69.6

Speed		Case Length		Case Width	Case Height	L+B	Handling
		L		W		H	
Adhesive tape	15 c/min	Min	200	160	130	360	Numerical axes
		Max	500	340	330	770	
Hot melt glue	19 c/min	Min	180	160	150	220	
		Max	500	340	330	770	

SD69.8

Speed		Case Length		Case Width	Case Height	L+B	Handling	
		L		W		H		
Adhesive tape	13 c/min	Min	200	160		130	360	Numerical axes
		Max	600	400		400	1000	
Hot melt glue	15 c/min	Min	200	160		160	360	
		Max	600	400		280	1000	

SD59 compact

Handling	
Adhesive tape	Numerical axes
Hot melt glue	

SD58 compact

Handling	
Adhesive tape	6 axes robot
Hot melt glue	