

# Shanklin® Models T-7H

## Shrink Tunnel

Simple, Reliable, and Hard-Working for Superior Packages Every Time




- **Virtually Maintenance-Free**—Thanks to straightforward, dependable design.
- **Easy to Use**—Set temperature, conveyor speed, velocity, and go!
- **Flexible**—Adjustable top air jet velocity ensures superior shrinks of unusual product.
- **Durable**—Features heavy-duty conveyor, stainless steel mesh belt, and variable speed DC drive.

**Simple, reliable, and hard-working...that's the Shanklin high-performance line of proven shrink tunnels. Contact your Shanklin distributor to find out more.**

## A Tireless Worker You Can Rely On

The Shanklin Model T-7H Shrink Tunnel gives you the heavy-duty, continuous service your packaging production demands. Loaded with features and accessories, the highlight of the T-7H is a higher tunnel opening designed to easily accommodate those medium- to high-profile packages that can pose frustrating wrapping challenges. Easy access front-mounted control box comes standard on the T-7H, in left- or right-hand options.

### T-7H Plan Views

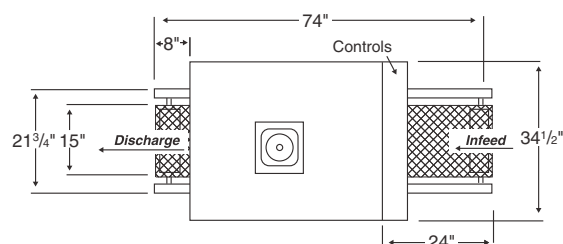

## The Perfect Partner

Partner your T-7H Shanklin Shrink Tunnel with a Shanklin F-1 Form-Fill-Seal Wrapper for a complete, dependable, quality shrink packaging solution.



## Shanklin Model T-7H Specifications

	Model T-7H
<b>Tunnel passage</b>	12" high x 22" wide x 42" long
<b>Overall dimensions</b>	Maximum 82" high x 34 1/2" wide x 74" long Optional 24" discharge, giving overall length of 90"
<b>Conveyor height</b>	28" minimum, 40" maximum
<b>Conveyor speeds</b>	Variable from 15 to 120 ft./min.
<b>Blower motor</b>	3/4 hp, single phase capacitor start
<b>Heaters</b>	Six finstrip (encased element)
<b>Power*</b>	230 volts, 57 amps, 1 phase, 13.1 KVA max. (6.6 KVA normal usage) 230 volts, 36 amps, 3 phase, 8.2 KVA max. (4.1 KVA normal usage)
<b>Temperature controller</b>	Precision indicating controller Calibrated 50° to 500° F
<b>Controls</b>	<ul style="list-style-type: none"> <li>• Main power fused disconnect</li> <li>• Adjustable top air flow</li> <li>• Conveyor variable speed</li> <li>• Volume control for bottom air</li> <li>• Cascade plates for side air</li> <li>• Tunnel control switch</li> <li>• Main air velocity</li> <li>• Conveyor switch</li> </ul>
<b>Safety features</b>	<ul style="list-style-type: none"> <li>• Motor overload protection</li> <li>• Emergency stops switches</li> <li>• High temperature limit switch</li> </ul>
<b>Accessories</b>	<ul style="list-style-type: none"> <li>• "Poly kit" for use with LDPE</li> <li>• Composite link conveyor belt</li> <li>• Package guides</li> <li>• Live/dead roller conveyor</li> <li>• Casters</li> <li>• End viewing windows</li> </ul>

\*Optional voltages, amperages and KVA specifications can be supplied upon request.

Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

## STAINLESS STEEL MODELS AVAILABLE

Distributed by:



Shrink Packaging  
100 Westford Road  
Ayer, MA 01432  
978-772-3200 Fax: 978-772-5660  
www.shanklincorp.com

**Our Products Protect Your Products®**

Corporate Office: Sealed Air Corporation  
200 Riverfront Boulevard, Elmwood Park, NJ 07407 USA  
www.sealedair.com

© Reg. U.S. Pat. & TMOff. © Sealed Air Corporation (US) 2010. All rights reserved. Printed in the U.S.A. The "9 Dot Logo" and "Sealed Air" are registered trademarks of Sealed Air Corporation (US).

rev 9/7/10