
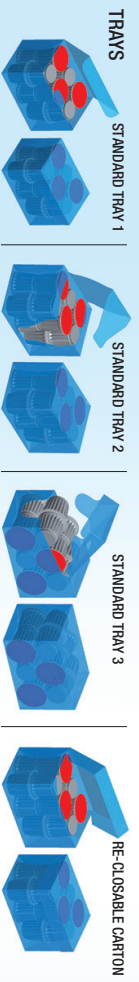


# NTP

## SINGLE CELL TRAY PACKER

• Affordable • Efficient • Practical

	NTP-10	NTP-20	NTP-30	NTP-50
Speeds	10 cartons/min 120-160 products/min	20 cartons/min 240 products/min	30 cartons/min 360 products/min	50 cartons/min 600 products/min
Packaging Options	Standard: 12, 18, 24 count Optional: 8, 10, 12, 14, 16, 18, 20, 24 count/ Club Format 48-120 count RSC			
In-feed Options	Single Lane / Dual Lane			
Carton Pattern Options	2x2 / 2x3 / 2x4 / 3x4			
Carton Type	Tri-Seal / Re-Closable			

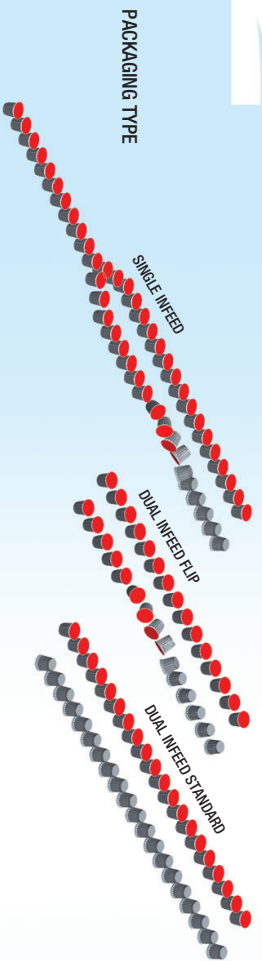

**NUSPARK INC.**  
 1111 Flint Road, Units 29-30  
 Toronto, ON, Canada, M3J 3G7  
 Tel.: (416) 663 7071  
 Fax: (416) 663 0233  
 www.nuspark.com

NUSPARK Inc. is a leading manufacturer of specialized precision machinery for the packaging, food, plastics, beverage, automotive, high-tech and automation industries, with full service capabilities in mechanical, electrical, design, research & development engineering.



**CASE AND TRAY PACKERS**  
**VERTICAL AND HORIZONTAL CARTONERS**  
**SINGLE CELL CASE AND TRAY PACKERS:**  
**CASE ERECTING / TRAY FORMING, LOADING, SEALING**  
**TRAY FORMERS**  
**TURNKEY SOLUTIONS**




**NUSPARK INC.**

# SINGLE CELL TRAY PACKER

- Affordable • Efficient • Practical

# NTP



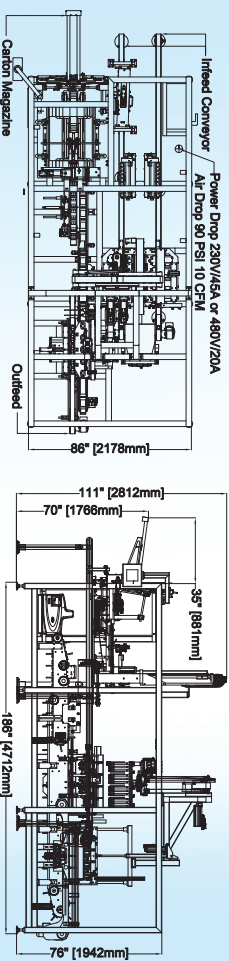


## SPECIFICATIONS:

DRIVE:	AC Motors (product transfer), Servo Drives ("Delta" Loader, Tray transfer)
PRODUCT SIZE RANGE:	Per Project Specification
TRAY/CARTON SIZE RANGE:	Per Project Specification
TRAY SEALING:	"Nordson" Glue system.
MAGAZINE CAPACITY:	2 ft. (~700 blanks)
FRAME:	Stainless Steel
GUARDING:	Full length polycarbonate with extruded anodized aluminum frames.
FINISH:	Powder coat epoxy. All parts in contact with product are stainless steel, anodized aluminum or plastic.
ELECTRICAL:	"ELAU" C-400 Programmable logic motion controller. Color touch screen HMI. NEMA 12 wiring and enclosures. 3-Color stackable warning lights.
PNEUMATICS:	"FESTO"
INSTALLATION REQUIREMENTS:	Power: 230 VAC/30 Amps. or 480 VAC/15 Amps. 3 phase. 50/60 Hz Air: 90 PSI, 10 cfm.

## MAIN FEATURES

- 3 in 1 single cell technology – form, load and seal on one frame
- DELTA Style 2 axis robot – single head or multi head
- Precise, Repeatable technology
- Smallest industry footprint – 160" length x 78" width
- Heavy duty welded tubular stainless steel frame
- No tools changeover – generally less than 5 minutes



# NTP

# NTP