




The Conflex® FUSION SYNC continuous motion shrink wrapper continues the FUSION Series reputation as the shrink wrapping industry's best value! The combination of high speed servo driven seal bar motion, modern easy-to-use controls and time tested shrink machine design make the FUSION SYNC the perfect wrapper for automatic shrink sealer applications. Compared to other shrink wrap machines in its class, Conflex makes the FUSION SYNC the smart choice to fill your industrial shrink wrapping needs.

Features and Benefits

- **Continuous Motion Cross Seal** - Servo movement makes it faster
- **Color HMI Touch Screen** - Provides intuitive operator friendly product setups in 3 languages
- **Easy Load *Quickfire* Film Cradle** - The fast film threading process makes changeovers more efficient
- **Self-Tracking Belts** - Eliminates tracking issues and reduces maintenance (infeed & transfer only)
- **Open Access/Swing-Out Inverting Head** -Allows fast film threading
- **Mushroom Style Cross Seal** - Provides positive hot knife heat sealing on most films
- **UL Listed Electronics** - For dependable shrink wrapping operation
- **Casters and Leg Levelers** - Standard equipment to make your shrink wrapping operation more mobile
- **4 Modes of operation** - Handles a variety of product spacing scenarios
- **Multiple Shrink Wrapping Options Available** - Left-to-right product flow, stainless steel, film saver and other customizable heat sealer options available

Specifications

Electrical Requirements	220 Volt, 20 Amps, 3 phase
Air Requirements	80 psi
Seal Bar Width and Height	24" wide, 10" high
Maximum Film Width	32"

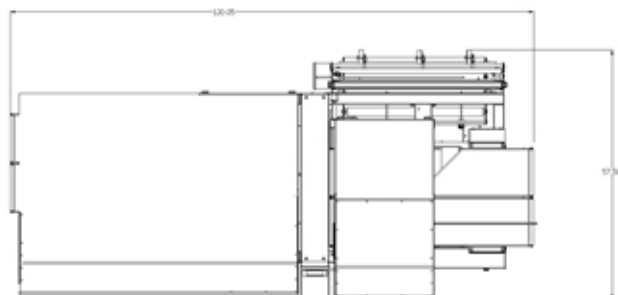

Maximum Roll Diameter	14"
Overall Machine Dimensions	120"L x 59.5"W x 57.5"H
Maximum Operating Speeds	100 feet per minute
Deck Height on Casters	34.5?
	3" L to unlimited L
Package Dimensions*	1" W to 22" W**
	1/8" H to 10" H

*May require additional components and set-up time to run the entire size range

** Product dependent

[Print](#) :: [Close](#)