

**SUPER MUSTANG** MODEL S1050

## SUPER FEATURES

**WEB TIGHTENER CONTROL KNOBS.**

**EXCLUSIVE CAM-THRU FLYING KNIFE**

**CANTED FIN WHEEL ADJUSTMENT**

Two sets of Fin Seal Wheels assure positive longitudinal seal. Feeding and tracking of wrapping material control from one point . . . no pressure on product. Irregular shapes do not affect speed or control of package. Wrapping material continues to track and remain in register even without product.

**ADJUST CRIMPER PAUSE POSITION**

**SEPARATE CUTTING HEAD HOUSING**  
with hand wheel vertical adjustment allows center line cut-off. No shimming required when product height changes.

**COMPACT, CENTRALIZED CONTROL PANELS:**

**A. ELECTRICAL**—Precision temperature controls, rather than rheostats or variacs, maintain set temperature regardless of voltage fluctuation, speed change, or machine stoppage.

**B. OPERATING**—Centrally located controls for varying speeds, starting, stopping and jogging.

**SANITARY DESIGN**  
**STAINLESS STEEL**  
**INFEED CONVEYOR**


**CANTILEVERED FIN WHEEL HOUSINGS**

**KNOB WHEEL** times in-feed chain to allow rapid, accurate positioning of cut off. Also adjusts dual flight to change lug spacing on conveyor chain.

**VARIABLE SPEED AND CUT OFF REMOTE CONTROLS**

**CUTTING HEAD CLUTCH ENGAGEMENT CONTROL**  
Simple tool-less disengagement for adjusting epicycle pause position.


**ELECTRIC EYE CONTROL**  
Solid state electric eye control (optional). Adjustable from front of machine while running.

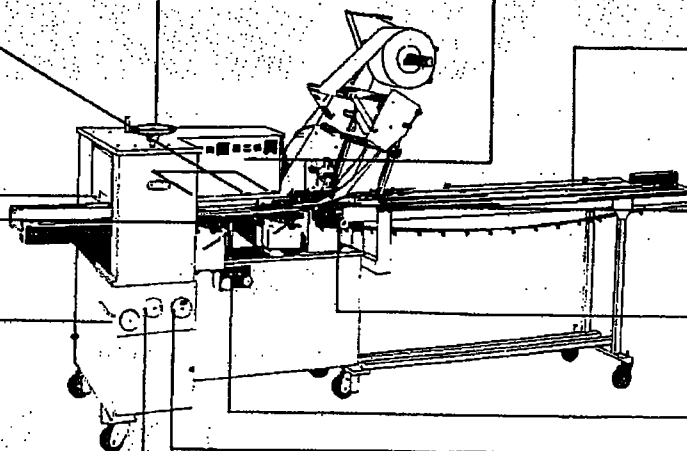

# FEATURES AND SPECIFICATIONS

## **SUPER MUSTANG**

### *HORIZONTAL WRAPPER Model SuperM*

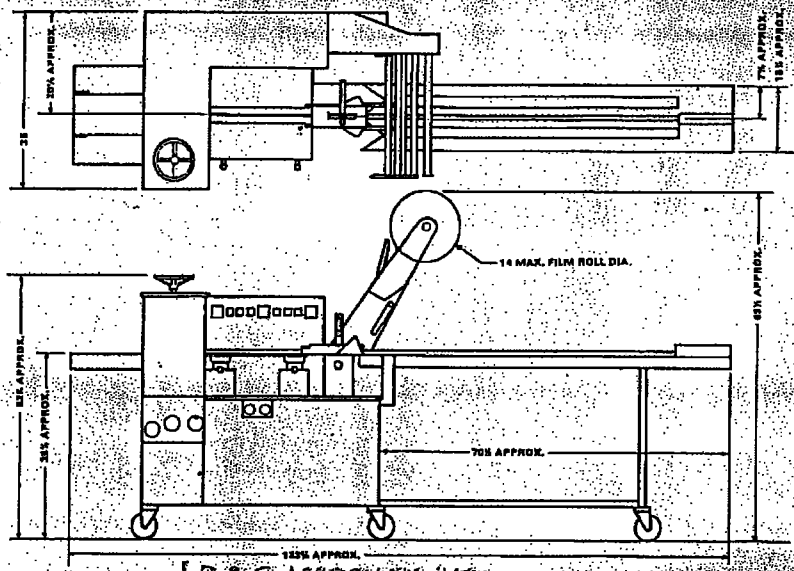

Modular frame—rigid heavy duty construction. Compact design. ☐ Rapid change-over—all mechanical dial adjustments. ☐ Exclusive, patented cam thru knife. ☐ Positive timing of cutting head—chain driven. ☐ Speed changer—adjust crimper pause—hand adjustment, no tools. ☐ Centralized operating controls—remote electrical panel. ☐ Adjustable package cut-off length—standard included in basic design—no change gears required. ☐ Speed range—20-120 min. ☐ Size range: Length—4 to 16"; Width— $\frac{1}{2}$  to 8"; Height—Up to 3"; Web Width—16". Larger dimensions on request. ☐ 2 H.P. A.C. variable drive. ☐ Infeed conveyor overload clutch on infeed conveyor. ☐ Canted fin wheels (adjustable angle).

#### WRAPPING MATERIALS




Virtually all heat-sealing materials, such as cellophane, polycel, polycoated foil and paper, heat-seal glassine, heat-seal polypropylene, and many others.



## OPTIONS

**CARD SHEETER** cuts and feeds board from roll stock with variable cut off. No change gears required. Side or end mounted.

**VARIOUS IMPRINTING SYSTEMS** for coding, pricing, etc. Very accessible for adjustments and easy maintenance.

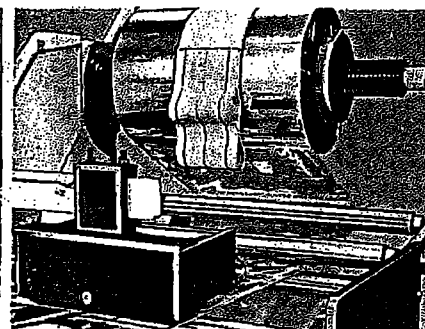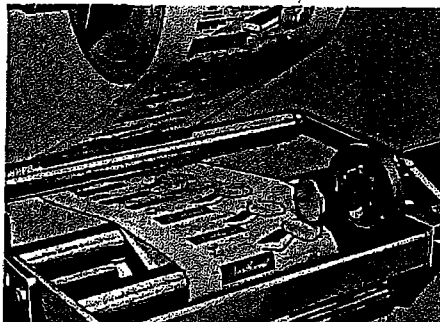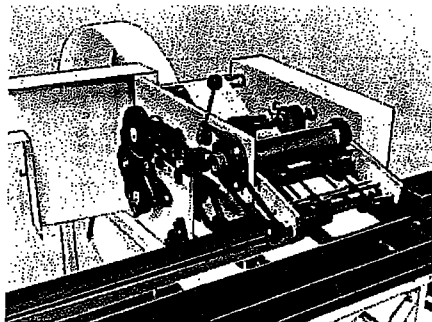

- ☐ Flat top chain
- ☐ Triple flat top chain
- ☐ Dual flight infeed
- ☐ Extended infeed conveyor
- ☐ Electric eye register control
- ☐ Hand wheel adjustable side guides

- ☐ 2-Up cutting head
- ☐ Hole punch in crimpers
- ☐ Header label style crimpers
- ☐ Gussetting attachment
- ☐ Wider crimpers available up to 12"
- ☐ Ink, foil and emboss coders

- ☐ Flat and U-board feeders
- ☐ Labelers available
- ☐ Double parent roll backstand
- ☐ Power takeoff (infeed or discharge)
- ☐ Variable speed discharge conveyor

- ☐ High precision heat controls
- ☐ Centralized lubrication system
- ☐ U.S.D.A. specification

Automatic Feeders and other special accessories available on request . . . consult factory.



**Doboy Packaging Machinery**  
New Richmond, Wisconsin 54017 / Telephone 715/246-6511  
**Domain Industries Inc.**

#