




**Little David delivers
packaging equipment
that works for you**



**Chain and
lug provides
positive
drive**

Little David CF-50T



Case Former

CF-50T

Case forming for the Real World

This reliable case former for industrial environments forms a wide range of cases.



The CF-50T offers:

- ▣ Chain-lug drive
- ▣ Powered hopper
- ▣ Pneumatic tuckers
- ▣ Allen Bradley PLC
- ▣ Quick changeover
- ▣ Heavy duty steel construction
- ▣ American craftsmanship

Enhanced features include:

- ▣ Low friction sled material
- ▣ Walk-in hopper
- ▣ Increased box range
- ▣ Full safety guarding

LITTLE DAVID



www.loveshaw.com

CF-50T


Introduction:

The CF-50T expands the Little David® line of high performance case formers developed by Loveshaw, an ITW company. This innovative machine has been designed to automatically form, fold, and bottom seal RSC corrugated cases. The CF-50T easily folds a variety of corrugated cases - from double wall to recycled material, and can form up to 20 cases per minute.

The Little David® CF-50T with its heavy duty steel construction is designed to endure the most rigorous industrial environments. The CF-50T requires minimal operator training; decreasing your operating costs, while improved tool-less changeover features make it easier than ever to switch from one box size to another. The CF-50T is designed with your needs in mind. Not only, is the Little David® CF-50T the highest quality case former in the industry; but it is also the most cost effective.



CF-50T

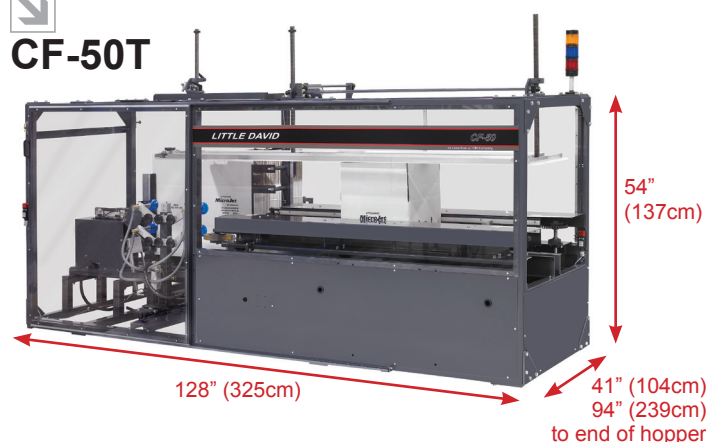

Options of the CF-50T:

- Spare parts kit
- Special electrics
- Box jam warning
- Low tape warning
- Low hopper warning
- Casters
- Tape Detection
- Extended Legs
- Guarding package
- Stainless steel
- Automatic central lube
- Available in CE, NEMA 4
- Extended capacity powered hopper
- Leveling Pads
- Air Dryer
- Mobile Control Station

Specifications for the CF-50T:

Power Required

- 110 Vac, 60Hz, single phase, 10 Amps
- Note: Other voltages available. Contact Loveshaw for details.

Air Requirements:

- 11 SCFM @ 80 psi.

Tape Specifications:

- Any commercially acceptable brand of pressure sensitive tape.
- Width: 1-1/2" (38mm) to 2" (51mm); 3" (76mm) optional.
- Tape Roll Diameter: 15" (381mm) maximum on a 3" (76mm) core.
- Roll Length: up to 2000 yards (1829mm).

Production Rate:

- CF-50T: up to 20 cases per minute, depending on case size and corrugated quality. Standard: 14cpm.

Corrugated Orientation:

- Printing on case and fold orientation must match footprint of the machine.

Case Dimensions:

- | | | |
|-----------|--------|-------------------------------|
| • CF-50T: | Length | 7" to 24"
(177mm to 610mm) |
| | Width | 6" to 16"
(152mm to 406mm) |
| | Height | 4" to 20"
(102mm to 508mm) |

Weight:

- 1000 lbs (453.6 kg), uncrated.

Standard Discharge Height:

- 23 1/4 inches (50.7 cm).

Distribution Information:

LOVESHAW
an ITW Company

2206 Easton Turnpike
P.O. Box 83
South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
(800) 572-3434

LOVESHAW Europe

A Division of ITW Ltd.

Unit 9 Brunel Gate,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964

