

Continuous Bagmaker VELOCITY



Patented, independently phased, twin sealing jaws separate the Velocity from all other high speed machines, and virtually eliminate lost cycle time. This is the fastest VFFS machine in the world – no competition.

**max.
speed**


300
bpm

**bag
size**


max.
300 mm x 1 000 mm (11.8" x 39.37")
min.
50 mm x 90 mm (2" x 3.54")




Bag Types



Bag Options



Recloseable Solutions



Continuous Bagmaker VELOCITY In Detail

Viking Masek's continuous motion bagmaker Velocity 250 (300) is capable of true production speeds up to 250+ bpm. The unique center mounted filling tube and naturally counterbalanced sealing profile are designed to provide vibration free, extremely smooth operation at all speeds. Our color graphic operator interface coupled with "off-the-shelf" PLC controls ensures industry leading ease of use and the highest reliability. The Velocity is also extremely versatile, handling package sizes up to 300 mm (12") wide and multiple package styles.

features

- Robust stainless steel frame
- Siemens or Allen Bradley control system
- Servo jaw actuation
- Patented, dual-jaws technology
- Vacuum pull belt
- Small footprint
- Short film path
- Minimal maintenance requirements
- Film unwind with tension control
- Product stagers
- Bag deflators
- Photo eye for bag length controls
- Runs most film structures
- Storage for 100 product recipes
- Quick film splice table
- No tool change-over
- Off-the-shelf components
- Jaw jam detection

options

- Gusset assembly
- Washdown IP66 construction
- Integration with variety of fillers
- Printers, metal detectors, label applicators, checkweighers
- In-feed and take-away conveyors
- Gas flush
- Tear notch
- Round or Euro hole punch
- End-seal cooling air
- Promotion strip applicator
- Chain-bag capability

Max. speed

300 bpm

Weight

900 kg (1,985 lbs)

Bag width

50–300 mm
(2"–11.8")

Air pressure


6 bar
(15–20 SCFM at 90 PSI)

Bag length


90–1 000 mm
(3.54"–39.37")

Power supply

6 kVA
(480 V, three phase,
60 Hz, 20 AMPS)

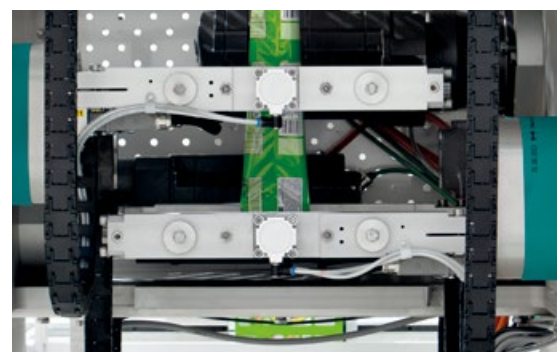

Machine drawings

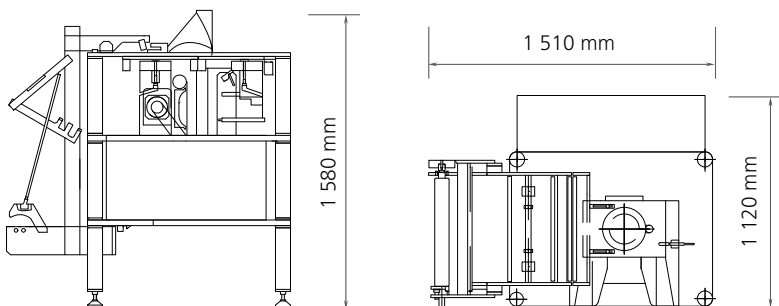

Europe, Asia, Africa, Australia

Viking Mašek, a.s. | Průmyslová 1747 | 258 01 Vlašim | Czech Republic

Phone +420 317 850 500 | **Email** info@masek.cz | **Website** www.masek.cz, www.vikingmasek.cz

North and South America

Viking Masek Global Packaging Technologies, Inc. | 40 Woodland Court | Oostburg, WI 53070 | USA

Phone +1 920 564 5051 | **Email** sales@vikingmasek.com | **Website** www.vikingmasek.com