

SPECIFICATION SHEET

ECOM™ EXTENDED CAPACITY OUTSERT MODULE



ECOM™ with standard
24 tray capacity shown

FEATURES & BENEFITS:

- Filled trays of outserts are placed into the angled powered tray magazine
- Loading trays into the finger-safe conveyance system is **ergonomically friendly, safe, easy and quick**
- Covered or sleeved trays are not required which **saves material cost**.
- **Convenient shelf provided** for preparing and staging of trays
- **Interfaces with** the MGS *TopSserter II™*, *SideWinder™* or certain other OEM machines
- Tool-less **changeovers accomplished in minutes**
- Construction fully **supports ANSI/PMMA B155.1 safety and cGMP guidelines**
- The ECOM™ is a self-contained module that may **field install without validation**

9900 85th Avenue North | Maple Grove, MN 55369 | 800.790.0627 | info@mgs-machine.com | www.mgs-machine.com




1.

P. 1

ECOM™ EXTENDED CAPACITY OUTSERT MODULE

SPECIFICATION SHEET

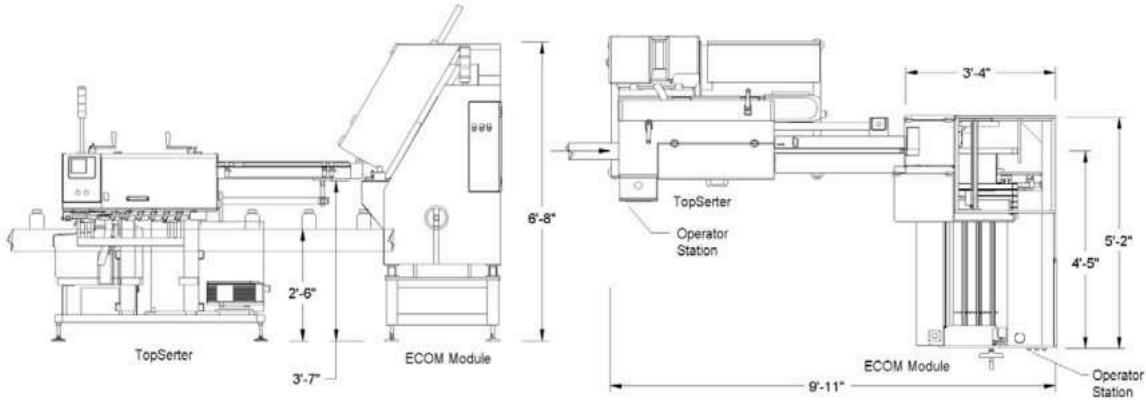

STANDARD MACHINE FEATURES:

- Three foot long, powered magazine
- Powered tray handling
- Powered "Empty Tray Assist" mechanisms ensuring all outserts are removed
- Stacklight alarm system
- Empty tray discharge chute
- Tool-less changeover
- Stainless steel tubular welded frame

OPTIONS AVAILABLE:

- Extended (longer) Powered Tray Magazine
- Long tray extension kit
- Catch bin for empty tray discharge

MAXIMUM SPEEDS:

- Automatic unloading of up to 10 trays per minute

TYPICAL UTILITY REQUIREMENTS:

- ELECTRICAL: 115 VAC 1 Ph 50/60 Hz or 230 VAC 3 Ph 50/60 Hz
- AIR: 80 PSI Filter & Regulator Provided

PRODUCT SIZE RANGE:

Outserts:

- Min: 1.00" x 1.00" 25 mm x 25 mm
- Max: 1.50" x 2.25" 38 mm x 57 mm

Tray Lengths:

- Min: 16"
- Max: 39" standard, 48" with extension kit

(Above table is for standard machine size range. Deviations are available)

9900 85th Avenue North | Maple Grove, MN 55369 | 800.790.0627 | info@mgs-machine.com | www.mgs-machine.com



1.