

BLUE STAR

Power Systems Inc.

Diesel Product Line

208-600 Volt

JD125-03IT4

60 Hz / 1800 RPM

125 kWe / 110 kWe

Standby / Prime

Ratings

	240V	208V	240V	480V	600V
Phase	1	3	3	3	3
PF	1.0	0.8	0.8	0.8	0.8
Hz	60	60	60	60	60
Generator Model	431CSL6204	363CSL1607	363CSL1607	363CSL1607	363PSL1658
Connection	12 LEAD ZIG-ZAG	12 LEAD WYE	12 LEAD DELTA	12 LEAD WYE	4 LEAD WYE
Standby					
kWe	125	125	125	125	125
AMPS	521	434	376	188	150
Temp Rise	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C
Prime					
kWe	110	110	110	110	110
AMPS	458	382	331	166	132
Temp Rise	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C

Standard Equipment

- | | | |
|---|--|--|
| <p>Engine</p> <ul style="list-style-type: none"> ▶ Radiator Cooled Unit Mounted (50°C) ▶ Blower Fan & Fan Drive ▶ Starter & Alternator ▶ Oil Pump & Filter ▶ Oil Drain Extension w/Valve ▶ Governor - Electronic Isochronous ▶ 12V Battery System & Cables ▶ SAE Flywheel & Housing ▶ Air Cleaner (Dry Single Stage) ▶ Exhaust Particulate Filter / Silencer Mtd ▶ Flexible Fuel Connectors ▶ EPA Certified - Tier IT4 | <p>Generator</p> <ul style="list-style-type: none"> ▶ Brushless Single Bearing ▶ Automatic Voltage Regulator ▶ ± 1.0% Voltage Regulation ▶ 4 Pole, Rotating Field ▶ 130°C Standby Temperature Rise ▶ 105°C Prime Temperature Rise ▶ 100% of Rated Load - One Step ▶ 5% Maximum Harmonic Content ▶ NEMA MG 1, IEEE and ANSI standards compliance for temperature rise | <p>Additional</p> <ul style="list-style-type: none"> ▶ Microprocessor Based Digital Control ▶ Base - Formed Steel ▶ Main Line Circuit Breaker Mounted & Wired ▶ Battery Charger 12V 6 Amp ▶ Jacket Water Heater -20°F 2000W 240V w/Isolation Valves ▶ Vibration Isolation Mounts ▶ Radiator Duct Flange (OPU Only) ▶ Single Source Supplier ▶ 2YR / 2000HR Standby Warranty ▶ 1YR / 1500HR Prime Warranty ▶ Standard Colors - White / Tan / Gray |
|---|--|--|

Application Data

Engine			
Manufacturer:	John Deere	Displacement - Cu. In. (lit):	415 (6.8)
Model:	6068HFG94	Bore - in. (cm) x Stroke - in. (cm):	4.2 (10.6) x 5.0 (12.7)
Type:	4-Cycle	Compression Ratio:	17.2:1
Aspiration:	Turbo Charged, CAC	Rated RPM:	1800
Cylinder Arrangement:	6 Cylinder Inline	Max HP Stby (kWm):	201 (150)

Exhaust System	Standby	Prime
Gas Temp. (Stack): °F (°C)	779 (415)	779 (415)
Gas Volume at Stack Temp: CFM (m³/min)	682 (19.3)	682 (19.3)
Maximum Allowable Exhaust Restriction: in. H2O (kPa)	68.0 (17.0)	68.0 (17.0)

Cooling System		
Ambient Capacity of Radiator: °F (°C)	122 (50.0)	122 (50.0)
Maximum Allowable Static Pressure on Rad. Exhaust: in. H2O (kPa)	0.5 (0.12)	0.5 (0.12)
Water Pump Flow Rate: Gpm (lit/min)	124 (468)	124 (468)
Heat Rejection to Coolant: BTUM (kW)	5,977 (105)	5,977 (105)
Heat Rejection to CAC: BTUM (kW)	1,332 (23.4)	1,332 (23.4)
Heat Radiated to Ambient: BTUM (kW)	889 (15.6)	783 (13.7)

Air Requirements		
Aspirating: CFM (m³/min)	328 (9.3)	328 (9.3)
Air Flow Required for Rad. Cooled Unit: CFM (m³/min)	12,520 (354)	12,520 (354)
Air Flow Required for Heat Exchanger/Rem. Rad. CFM (m³/min)	Consult Factory For Remote Cooled Applications	

Fuel Consumption		
At 100% of Power Rating: gal/hr (lit/hr)	9.8 (37.2)	9.0 (34.0)
At 75% of Power Rating: gal/hr (lit/hr)	7.5 (28.5)	6.9 (26.1)
At 50% of Power Rating: gal/hr (lit/hr)	5.3 (20.1)	4.9 (18.6)

Fluids Capacity		
Total Oil System: gal (lit)	8.9 (32.5)	8.9 (32.5)
Engine Jacket Water Capacity: gal (lit)	3.1 (11.9)	3.1 (11.9)
System Coolant Capacity: gal (lit)	5.4 (20.4)	5.4 (20.4)


Deration Factors

Rated Power is available up to 5500 ft (1676 m) standby and 7500ft (2286 m) prime at ambient temperatures to 122°F (50°C). Consult factory for site conditions above these parameters.

DGC-2020 Control Panel

Standard Features


- ▶ Digital Metering
- ▶ Engine Parameters
- ▶ Generator Protection Functions
- ▶ Engine Protection
- ▶ CAN Bus ECU Communications
- ▶ Windows-Based Software
- ▶ Multilingual Capability
- ▶ Remote Communications to RDP-110 Remote Annunciator
- ▶ 16 Programmable Contact Inputs
- ▶ Up to 15 Contact Outputs (7 standard)
- ▶ UL Recognized, CSA Certified, CE Approved
- ▶ Event Recording
- ▶ IP 54 Front Panel Rating with Integrated Gasket
- ▶ NFPA 110 Level 1 Compatible

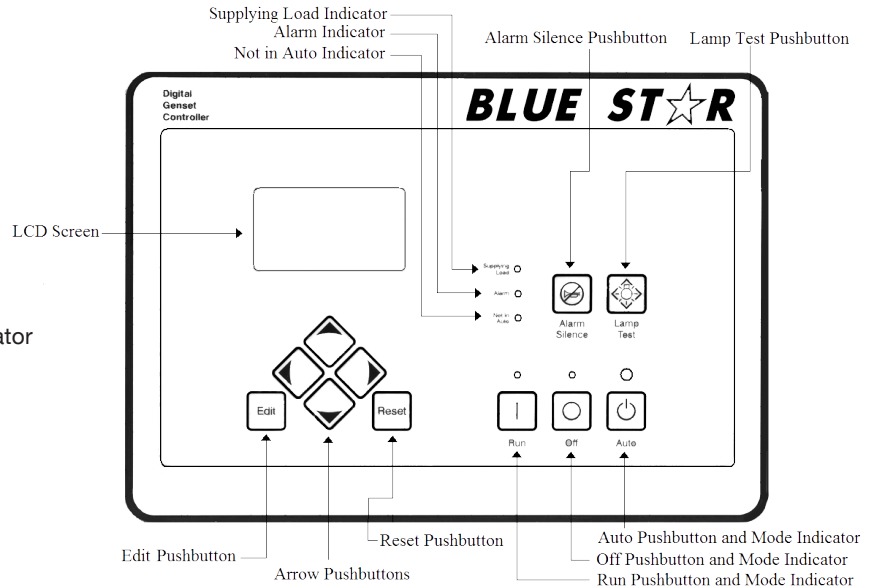


Weights / Dimensions / Sound Data

	L x W x H	Weight lbs
OPU	110 x 48 x 71 in	3450
Level 1	110 x 48 x 81 in	4175
Level 2	110 x 48 x 100 in	4500
Level 3	150 x 48 x 92 in	4750

Height measured from bottom of base to exhaust stack.

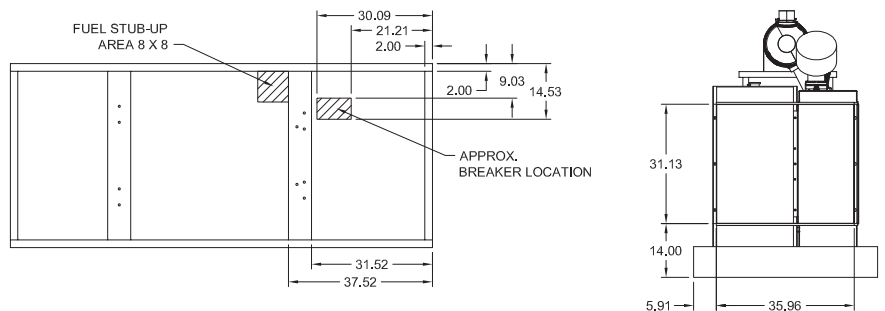


	No Load	Full Load
OPU	80 dBA	84 dBA
Level 1	77 dBA	80 dBA
Level 2	76 dBA	79 dBA
Level 3	67 dBA	70 dBA

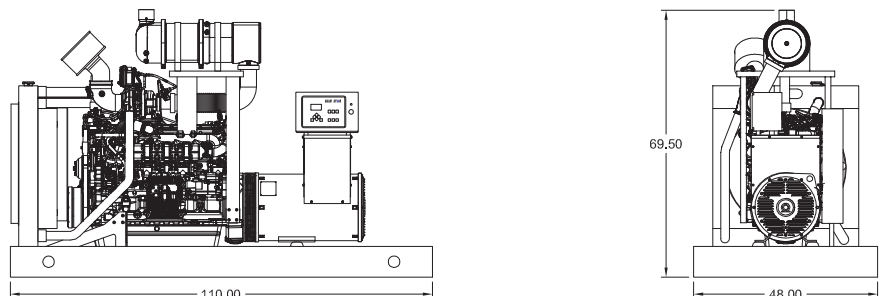


Drawings based on standard open power 480 volt standby generator. Lengths may vary with other voltages. Subject to change without notice. Sound data as measured at 23 feet (7 meters) in accordance with ISO 8528-10 at standby rating.

Optional Enclosures and Fuel Tanks



Level 1 Enclosure (WPE)

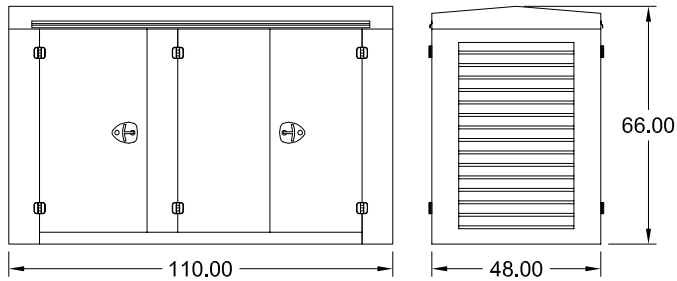

Level 2 Enclosure (WPF)

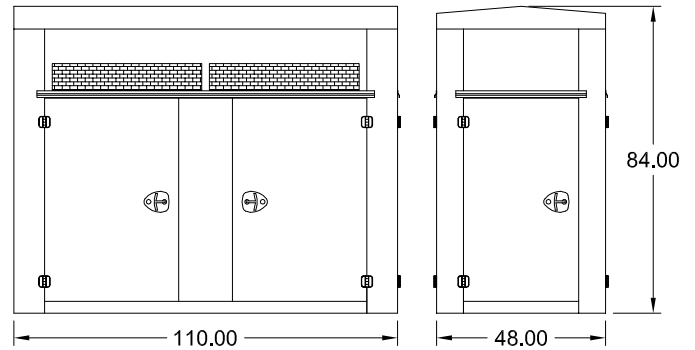

Level 3 Enclosure (SAE)

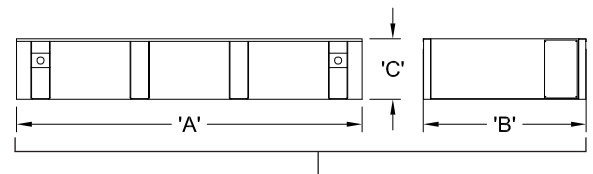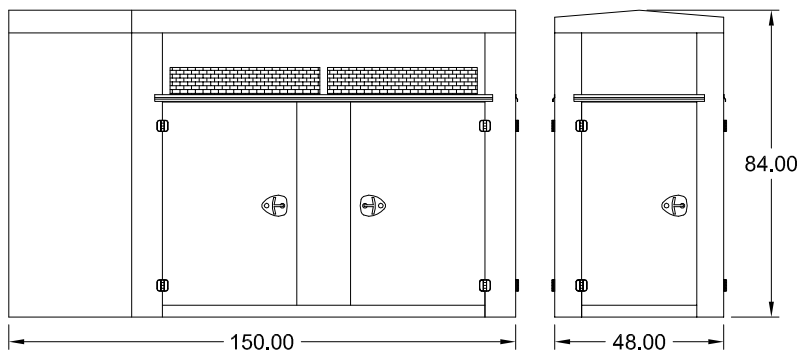

*Level 1 enclosures are 100 MPH Wind Rated as standard (up to 150 MPH available).

**Level 2 & 3 enclosures are 150 MPH Wind Rated as standard.

***Enclosure height does not include unit base or exhaust stack.

Double Wall UL 142 Listed Fuel Tanks

	24 Hour (250 Gallon)			48 Hour (500 Gallon)			72 Hour (750 Gallon)		
	A	B	C	A	B	C	A	B	C
OPU	110.00	48.00	18.00	110.00	48.00	36.00	156.00	48.00	36.00
Level 1	110.00	48.00	18.00	110.00	48.00	36.00	156.00	48.00	36.00
Level 2	110.00	48.00	18.00	110.00	48.00	36.00	156.00	48.00	36.00
Level 3	150.00	48.00	12.00	150.00	48.00	26.00	156.00	48.00	36.00

*All specification sheet dimensions are represented in inches.

**All enclosures and fuel tanks are based on the standard unit configuration. Any deviation can change dimensions.

***Level 1 enclosure not UL listed.

Materials and specifications subject to change without notice.

Distributed By:



Blue Star Power Systems, Inc.

52146 Ember Rd, Lake Crystal, MN 56055

Phone + 1 507 726 2508

www.bluestarps.com