

BLUE STAR

Power Systems Inc.

Diesel Product Line

208-600 Volt

JD150-02IT4

60 Hz / 1800 RPM

150 kWe / 135 kWe

Standby / Prime

Ratings

	240V	208V	240V	480V	600V
Phase	1	3	3	3	3
PF	1.0	0.8	0.8	0.8	0.8
Hz	60	60	60	60	60
Generator Model	431CSL6206	431CSL6202	431CSL6202	431CSL6202	431PSL6240
Connection	12 LEAD ZIG-ZAG	12 LEAD WYE	12 LEAD DELTA	12 LEAD WYE	4 LEAD WYE
Standby					
kWe	150	150	150	150	150
AMPS	625	521	452	226	181
Temp Rise	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C
Prime					
kWe	135	135	135	135	135
AMPS	563	469	406	203	163
Temp Rise	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C

Standard Equipment

Engine

- ▶ Radiator Cooled Unit Mounted (50°C)
- ▶ Blower Fan & Fan Drive
- ▶ Starter & Alternator
- ▶ Oil Pump & Filter
- ▶ Oil Drain Extension w/Valve
- ▶ Governor - Electronic Isochronous
- ▶ 12V Battery System & Cables
- ▶ SAE Flywheel & Housing
- ▶ Air Cleaner (Dry Single Stage)
- ▶ Exhaust Particulate Filter / Silencer Mtd
- ▶ Flexible Fuel Connectors
- ▶ EPA Certified - Tier IT4

Generator

- ▶ Brushless Single Bearing
- ▶ Automatic Voltage Regulator
- ▶ ± 1.0% Voltage Regulation
- ▶ 4 Pole, Rotating Field
- ▶ 130°C Standby Temperature Rise
- ▶ 105°C Prime Temperature Rise
- ▶ 100% of Rated Load - One Step
- ▶ 5% Maximum Harmonic Content
- ▶ NEMA MG 1, IEEE and ANSI standards compliance for temperature rise

Additional

- ▶ Microprocessor Based Digital Control
- ▶ Base - Formed Steel
- ▶ Main Line Circuit Breaker Mounted & Wired
- ▶ Battery Charger 12V 6 Amp
- ▶ Jacket Water Heater -20°F 2000W 240V w/Isolation Valves
- ▶ Vibration Isolation Mounts
- ▶ Radiator Duct Flange (OPU Only)
- ▶ Single Source Supplier
- ▶ 2YR / 2000HR Standby Warranty
- ▶ 1YR / 1500HR Prime Warranty
- ▶ Standard Colors - White / Tan / Gray

Diesel Product Line

150 kWe / 135 kWe



Application Data

Engine				
Manufacturer:		John Deere	Displacement - Cu. In. (lit):	415 (6.8)
Model:		6068HFG94	Bore - in. (cm) x Stroke - in. (cm):	4.2 (10.6) x 5.0 (12.7)
Type:		4-Cycle	Compression Ratio:	17.2:1
Aspiration:		Turbo Charged, CAC	Rated RPM:	1800
Cylinder Arrangement:		6 Cylinder Inline	Max HP Stby (kWm):	241 (180)
Exhaust System		Standby		Prime
Gas Temp. (Stack): °F (°C)		765 (407)		765 (407)
Gas Volume at Stack Temp: CFM (m³/min)		812 (23.0)		812 (23.0)
Maximum Allowable Exhaust Restriction: in. H2O (kPa)		68 (17.0)		68 (17.0)
Cooling System				
Ambient Capacity of Radiator: °F (°C)		122 (50.0)		122 (50.0)
Maximum Allowable Static Pressure on Rad. Exhaust: in. H2O (kPa)		0.5 (0.12)		0.5 (0.12)
Water Pump Flow Rate: Gpm (lit/min)		124 (468)		124 (468)
Heat Rejection to Coolant: BTUM (kW)		6,887 (121)		6,887 (121)
Heat Rejection to CAC: BTUM (kW)		1,981 (34.8)		1,981 (34.8)
Heat Radiated to Ambient: BTUM (kW)		2,348 (41.1)		2,348 (41.1)
Air Requirements				
Aspirating: CFM (m³/min)		399 (11.3)		399 (11.3)
Air Flow Required for Rad. Cooled Unit: CFM (m³/min)		12,520 (354)		12,520 (354)
Air Flow Required for Heat Exchanger/Rem. Rad. CFM (m³/min)		Consult Factory For Remote Cooled Applications		
Fuel Consumption				
At 100% of Power Rating: gal/hr (lit/hr)		11.8 (44.3)		10.6 (40.3)
At 75% of Power Rating: gal/hr (lit/hr)		8.8 (33.3)		8.0 (30.4)
At 50% of Power Rating: gal/hr (lit/hr)		6.1 (23.1)		5.6 (21.3)
Fluids Capacity				
Total Oil System: gal (lit)		8.6 (32.5)		8.6 (32.5)
Engine Jacket Water Capacity: gal (lit)		3.1 (11.9)		3.1 (11.9)
System Coolant Capacity: gal (lit)		10.2 (38.6)		10.2 (38.6)


Deration Factors

Rated Power is available up to 10,000 ft (3048 m) at ambient temperatures to 122°F (50°C) standby and prime.
Consult factory for site conditions above these parameters.

DGC-2020 Control Panel

Standard Features


- ▶ Digital Metering
- ▶ Engine Parameters
- ▶ Generator Protection Functions
- ▶ Engine Protection
- ▶ CAN Bus ECU Communications
- ▶ Windows-Based Software
- ▶ Multilingual Capability
- ▶ Remote Communications to RDP-110 Remote Annunciator
- ▶ 16 Programmable Contact Inputs
- ▶ Up to 15 Contact Outputs (7 standard)
- ▶ UL Recognized, CSA Certified, CE Approved
- ▶ Event Recording
- ▶ IP 54 Front Panel Rating with Integrated Gasket
- ▶ NFPA 110 Level 1 Compatible

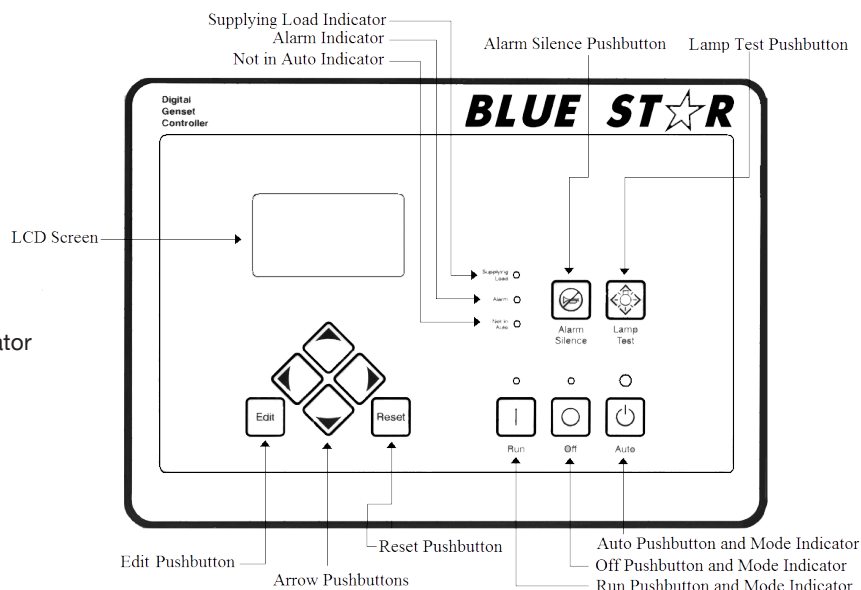


Weights / Dimensions / Sound Data

	L x W x H	Weight lbs
OPU	110 x 48 x 71 in	3775
Level 1	110 x 48 x 81 in	4525
Level 2	110 x 48 x 100 in	4825
Level 3	150 x 48 x 92 in	5100

Height measured from bottom of base to exhaust stack.

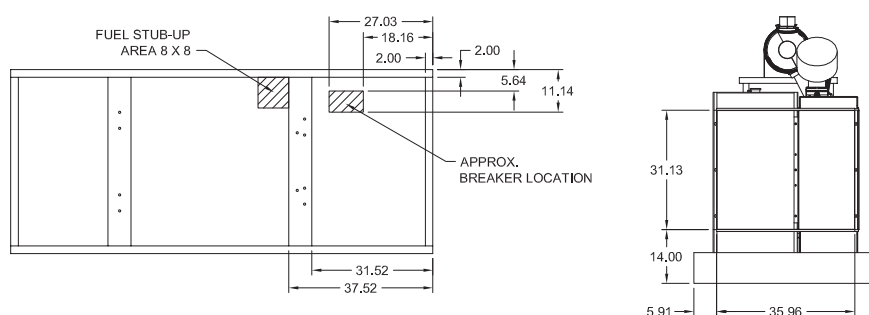

	No Load	Full Load
OPU	79 dBA	83 dBA
Level 1	78 dBA	82 dBA
Level 2	77 dBA	81 dBA
Level 3	68 dBA	71 dBA

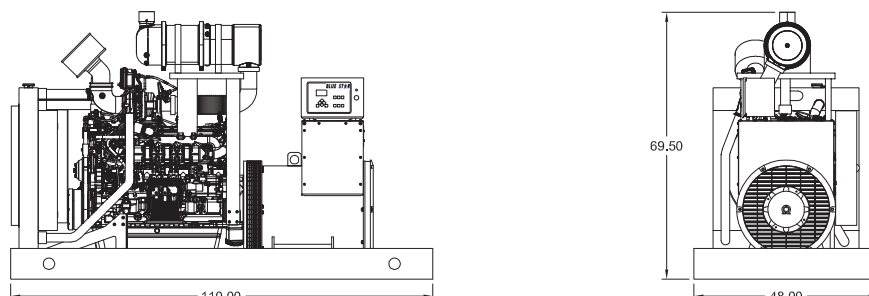

Drawings based on standard open power 480 volt standby generator. Lengths may vary with other voltages. Subject to change without notice. Sound data as measured at 23 feet (7 meters) in accordance with ISO 8528-10 at standby rating.


Diesel Product Line

150 kW_e / 135 kW_e




Optional Enclosures and Fuel Tanks



Level 1 Enclosure (WPE)

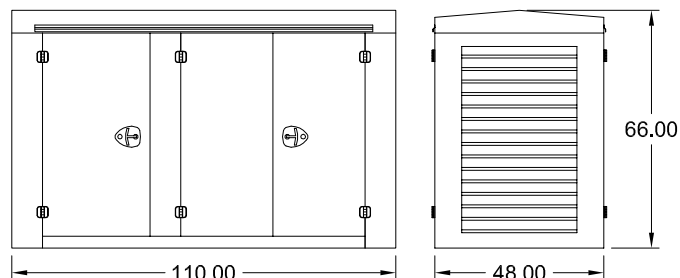

Level 2 Enclosure (WPF)

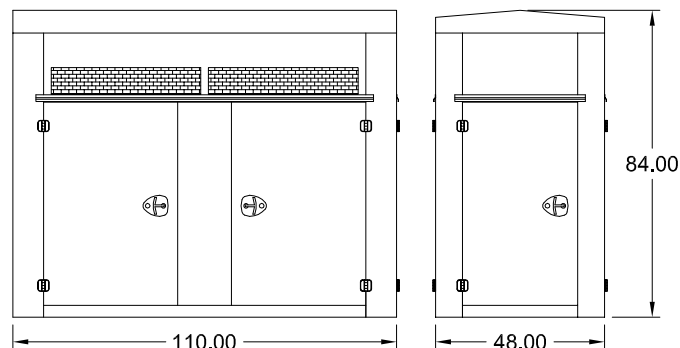

Level 3 Enclosure (SAE)

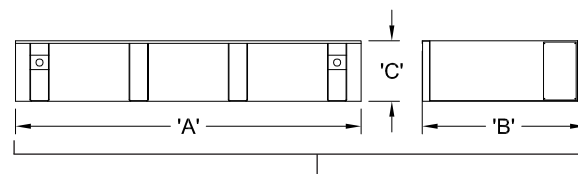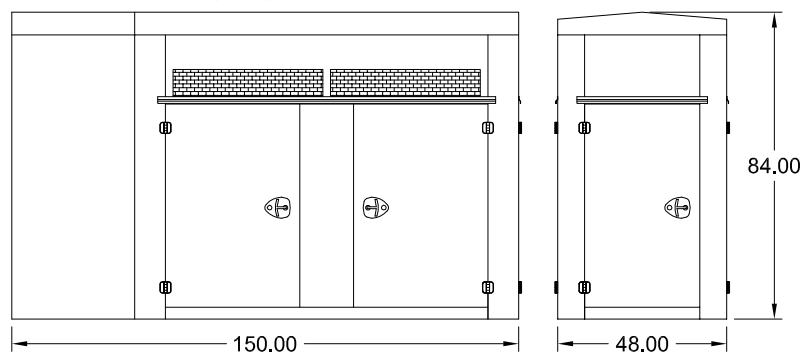

*Level 1 enclosures are 100 MPH Wind Rated as standard (up to 150 MPH available).

**Level 2 & 3 enclosures are 150 MPH Wind Rated as standard.

***Enclosure height does not include unit base or exhaust stack.

Double Wall UL 142 Listed Fuel Tanks

	24 Hour (375 Gallon)			48 Hour (750 Gallon)			72 Hour (1125 Gallon)		
	A	B	C	A	B	C	A	B	C
OPU	110.00	48.00	26.00	150.00	48.00	36.00	230.00	48.00	36.00
Level 1	110.00	48.00	26.00	150.00	48.00	36.00	230.00	48.00	36.00
Level 2	110.00	48.00	26.00	150.00	48.00	36.00	230.00	48.00	36.00
Level 3	150.00	48.00	18.00	150.00	48.00	36.00	230.00	48.00	36.00

*All specification sheet dimensions are represented in inches.

**All enclosures and fuel tanks are based on the standard unit configuration. Any deviation can change dimensions.

***Level 1 enclosure not UL listed.

Materials and specifications subject to change without notice.

Distributed By:



Blue Star Power Systems, Inc.

52146 Ember Rd, Lake Crystal, MN 56055

Phone + 1 507 726 2508

www.bluestarps.com