

JBJ 液洗类均质搅拌机

JBJ Liquid Washing Homogenizing Mixer

Committed to Establishing Cosmetic Machinery Industry Leadership

本公司生产的液洗均质搅拌机主要用于液体洗涤剂(如洗洁精、香波、沐浴露等)产品的配置,搅拌机集搅拌、分散、加热、冷却、泵出料、脱泡(可选型)等功能于一体,是国内目前厂家配置洗洁的理想设备。




JBJ-I Liquid washing homogenizing mixer is available for liquid products such as detergent, perfume, lotion etc. The mixer is consists of mixing, homogenizing, heating, cooling and pump discharge and defoaming function. it is the ideal equipment for liquid washing products for cosmetic industry over the world.

性能及特点

- ◆全方位的刮壁搅拌采用了变频器调速,可根据客户要求生产不同工艺的高品质产品;
- ◆多样化的高速均质机,强力混合固体及液体原料在液洗生产中能快速溶解AES、AESA、LSA等难溶物料,节约了能耗、大大缩短了生产周期;
- ◆锅体采用了三层不锈钢进口板材焊接组成,罐体及管道为镜面抛光,完全符合GMP要求;
- ◆根据工艺要求,罐体可加热并冷却物料,加热方式主要有蒸汽及电加热两种;出料方便,可直接出料,也可配置输送泵出料;

Performances and Features

- ◆The wall scraping mixer adopts frequency converter to adjust the mixing speed which would make various kinds of products according to the customers' requirements.
- ◆The diversified high speed homogenizer can powerfully mix solid liquid products and dissolve the material like AES, AESA, LSA etc. it save energy consumption and shorten the production time.
- ◆The pot body is welded with three layers imported stainless steel. The whole machine and pipes are mirror polished which is definitely satisfied with the GMP standard.
- ◆According to different processing, the main pot can be heated and cooled down, steam heating or electric heating. Discharge from the bottom by the homogenizer or by a transfer pump.

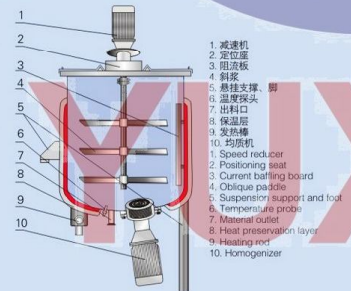

桨式搅拌 Paddle type blending

JBJ-I 液洗类均质搅拌机

JBJ-I Liquid Washing Homogenizing Mixer

Dedicated to provide you with lead
Cosmetics, pharmaceutical, food, chemical machinery as a whole solution

性能及特点

- ◆本机组专为中小型企业设计,班生产能力可达三次,机组分主锅、副锅、不锈钢输送泵、支架平台、控制系统。
- ◆只需在主锅内投料、溶解、搅拌、均质,再由输送泵输入副锅进行冷却、添加香精等。
- ◆出料时亦可放料,亦可泵出料。
- ◆适用于电加热的工作环境,主锅用于加热均质,副锅直接用于冷却、乳化、速度快、效益高。


Performances and Features

- ◆The system is specially designed for small and medium-sized enterprises. it can work for three batches every day. The system is consists of main pot, ancillary pot, stainless steel suction pump, platform and controlling system.
- ◆We shall pour materials into the main pot to dissolve, mix, homogenize. Then the material pump will transfer the material into the second pot to cool down or mix with perfume essence.
- ◆It can be discharged by both the homogenizer and pump.
- ◆It is better for electric heating condition. The main pot is used for heating and homogenizing, the second pot is used for cooling and emulsion. This makes it fast and efficient.



JBJ-I Liquid Washing Homogenizing Mixer

Committed to Establishing Cosmetic Machinery Industry Leadership

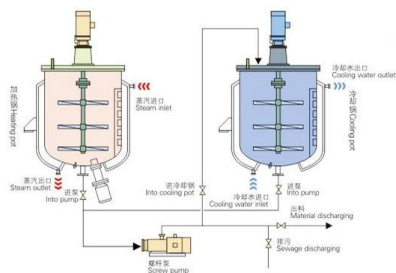

规格 Specification	容积(L) Volume	搅拌功率(kw) Blending power	搅拌转速(r/min) Blending rotation speed	均质功率(kw) Homogenizing power	均质转速(r/min) Homogenizing rotation speed	加热方式 Heating way
JBJ-200	200	1.5	0-65	3	3000	蒸汽或电 Steam or electric
JBJ-500	500	2.2	0-65	4	3000	
JBJ-1000	1000	2.2-4	0-65	7.5	3000	
JBJ-1500	1500	4-5.5	0-65	11	3000	
JBJ-2000	2000	5.5	0-53	11	3000	
JBJ-3000	3000	7.5	0-53	15	1500	
JBJ-5000	5000	11	0-53	22	1500	

注：本表中的数据因技术改进、定制而不符，以实物为准。
Note: In case of inconformity of the data in the form due to technical improvement or customization, the real object shall prevail.