
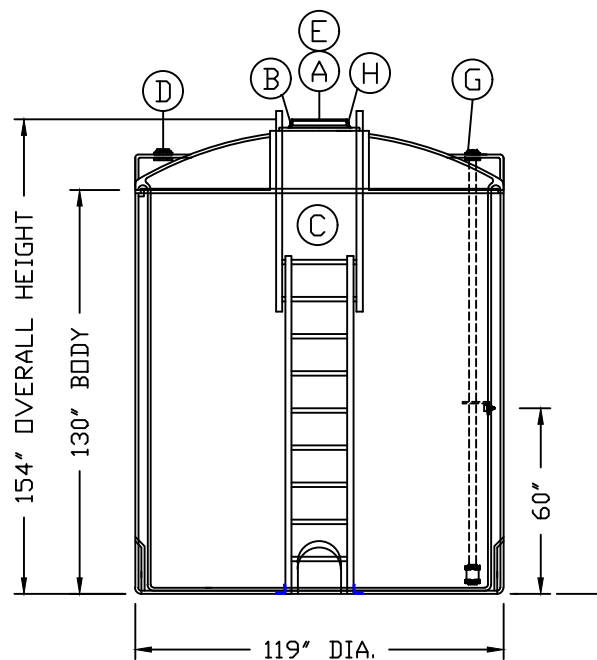


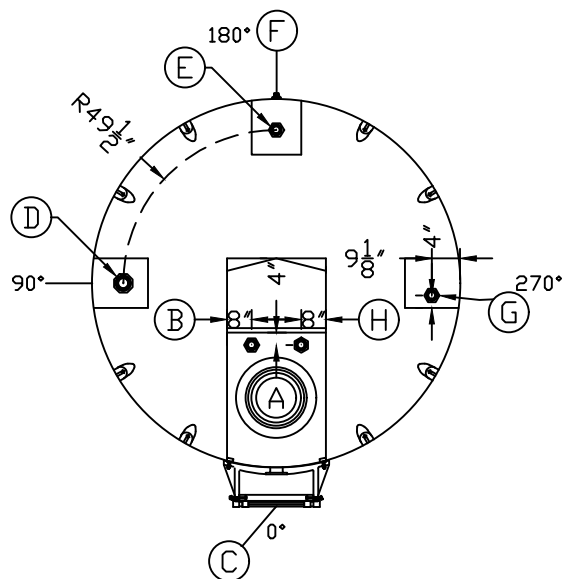

ACCESSORIES						
MK	SIZE	DESCRIPTION	DEG	ELEV	DOME	
A	16"	MANWAY W/ LEVER LOCK COVER	0°	-	X	
B	2"	BULKHEAD FITTING W/ EPDM GASKET (LEVEL TRANSMITTER)	0°	SEE	DWG	
C	13'	FIBERGLASS REINFORCED LADDER	45°	-	-	
D	3"	BULKHEAD FITTING W/ EPDM GASKET (VENT)	90°	-	X	
E	2"	BULKHEAD FITTING W/ EPDM GASKET & ANTI FOAM ELBOW ASSY (FILL)	180°	-	X	
F	.75"	BULKHEAD FITTING W/ EPDM GASKET (LEAK DETECTION PORT)	180°	134"	-	
G	2"	BULKHEAD FITTING W/ EPDM GASKET & DROP TUBE ASSY W/ ENCAPSULATED DONKER BOLTS & TRUE UNION CHECK VALVE (OUTLET)	270°	-	X	
H	2"	BULKHEAD FITTING W/ EPDM GASKET (LEVEL SWITCH)	0°	SEE	DWG	

GENERAL NOTES:

1. LOCATE FITTINGS FROM PLAN VIEW.
2. TANK(S) MUST BE INSTALLED PER ASSMANN CORPORATION USAGE & GUIDELINES.
3. FLEXIBLE EXPANSION JOINTS MUST BE USED ON ALL SIDEWALL CONNECTIONS TO MAINTAIN FACTORY WARRANTY.
4. TANKS ARE BUILT PER ASTM D 1998.
5. ASSMANN CORPORATION REQUIRES ALL TANKS BE VENTED. MINIMUM VENT SIZE TO BE 1.5 TIMES THE LARGEST INLET OR OUTLET CONNECTION SIZE.

REV		REVISION DESCRIPTION				REV DATE	
BCS01-SODIUM HYDROXIDE							
		300 N TAYLOR ROAD GARRETT, IN 46738 PHONE: (260) 357-3181 FAX: (260) 357-3738				CUSTOMER APPROVAL	
						92907	
		OVERALL TANK WEIGHT		3213 LBS.			
PRIMARY VESSEL		SPECIFIC GRAVITY 1.9 SP.G. MAX		SECONDARY VESSEL		SPECIFIC GRAVITY 1.5 SP.G. MAX	
RESIN USED EXXON PAXON CROSSLINK POLYETHYLENE		TANK WEIGHT 1753 LBS. TANK COLOR NATURAL		RESIN USED EXXON PAXON CROSSLINK POLYETHYLENE		TANK WEIGHT 1460 LBS. TANK COLOR NATURAL	
TITLE				DRAWN BY:		DRAWN DATE:	
IMT 5250 GAL. DOUBLE WALL STORAGE TANK				R.HUTH		7/6/21	
STAINLESS TECHNOLOGIES LLC.				DWG NUMBER:		REV	
ALL DIMENSIONS ARE IN INCHES AND ARE ±3%				99941-1		A	