


**FRESH VAC®****Modified Atmosphere  
Packaging Machine**

# A-200 Overhead and Floor Bin Machine

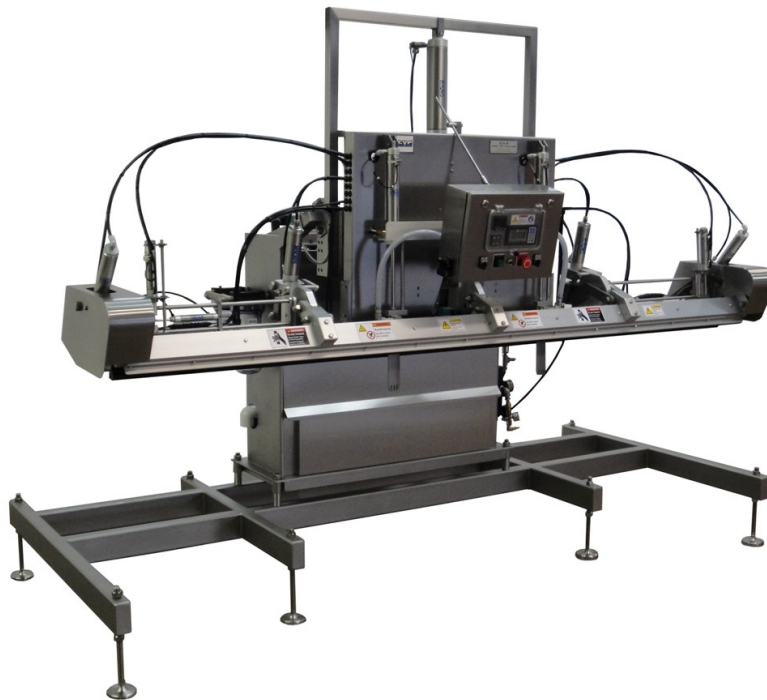

**MEETING INDUSTRY NEEDS  
WITH MODIFIED  
ATMOSPHERE PACKAGING  
MACHINERY FOR LARGE  
BULK CONTAINERS**

Case-ready distribution centers and other facilities that handle bulk bin containers can enjoy the benefits of modified atmosphere packaging with CVP's A-200 Bin Systems.

Equipped with seal bars up to 100" and overhead mounting capabilities, this unique A-200 model can vacuum/gas flush large bulk bins weighing over 2,000 pounds, it's the latest innovation from the leaders in modified atmosphere packaging

**View our videos on-line  
by  
scanning the QR code**



**Or go to [www.cvpystems.com](http://www.cvpystems.com)**

***Cutting edge technology from the leader in modified atmosphere packaging.  
Made with pride in the USA since***


**1972**

## Applications

- **Bulk Transfer**
  - Sub Primals
  - Pork Loins, Hams, Bellies
  - Grinds
  - Bulk Cheese
  - Produce
  - Cereal
  - Industrial Powders
  - Metal Parts
  - Plastic Bottle Barrier Pre-forms
- **Product Holding**
  - Stick Pepperoni
  - Salami
  - Deli Meat Logs
  - Snacks

## Advantages

- Shelf life extension.
- Reduced labor cost
- Reduced Packaging Cost
- Reduced floor space
- Reduced risk of contamination
- Sealed, tamper evident package
- No bottle necks because of different SKU's

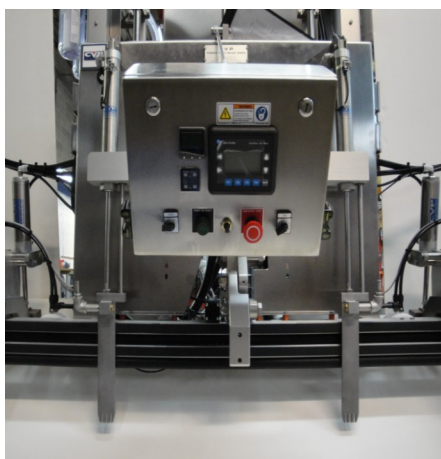

## Design Features

- **Hygienic Design** - Clean-in-place system for internal cleaning. External wash-down capability. Stainless steel snorkels
- **Reproducible Results** - All manifold sizes equipped with positive vacuum gas seal design to prevent snorkel leak back. PLC controls for multiple cycles and consistently low residual O2. Built-in multiple cycles for custom applications. Self contained vacuum pump
- **Operator Safety**-Dual electronic finger swipe start buttons
- **Seal Integrity** - Digital temperature controls with chisel point seal bar. Standard bag stretchers eliminate wrinkles ensuring consistent seals. Choice of impulse wire or hot bar sealing systems. Seal only feature allows operator to put a second seal or bag for added integrity.
- **Flexibility**- Specific option packages for a wide range of applications for overhead mounting systems. Gas accumulator tank sized to packaging requirements, dwell time frequency for product respiration, floating machine head for random fill levels and bin sizes.
- **Custom options**-Sealing manifolds in 100" (254 cm), 70" (178 cm) and 57" (145 cm) Vacuum pump and filters for wet and dry applications. Embossing date coders.
- **PLC Controls**-PLC controls provide a wide range of functional settings.

Construction	Stainless Steel/Hard Anodized Aluminum
<b>Dimensions</b>	
57" Unit	64.5" x 58" x 32.25" 164mm x 147mm x 77mm
70" Unit	74.5" x 58" x 32.25" 189mm x 147mm x 77mm
100" Unit	112" x 58" x 32.25" 284mm x 147mm x 77mm
<b>Power Requirements</b>	220/440 VAC 3Phase 18/9 Amp
<b>Air consumption</b>	1 CFM @ 80 PSI/Cycle
<b>Manifold Size</b>	Effective Seal Length
57"	53.75" (1365mm)
70"	67" (1701mm)
100"	98.5" (2502mm)



2518 Wisconsin Avenue  
Downers Grove, IL 60515 USA  
Phone: (630) 852-1190  
Website: [www.cvpsystems.com](http://www.cvpsystems.com)  
Email: [sales@cvpsystems.com](mailto:sales@cvpsystems.com)