TT-9CW TT-9CW2



High speed pouch filler/sealer



Pro Mach Flexible Packaging Group

650 Dekora Woods Blvd. Saukville, WI 53080

(888) 628-7491 (262) 268-8300

Info@ProMachFlexible.com www.ProMachFlexible.com







FEATURES & BENEFITS

- · Double pouch action machine for a variety of products.
- Designed to adhere to the most stringent safety and sanitation requirements.
- Operator friendly design for easy maintenance, operation and cleaning.


Pouch Opening, Solid Filling

A double action motion for stable pouch opening. Various filling machines can be interlocked.



Liquid Filling

Easy to disassemble for cleaning. Various types of nozzles to comply to your application.




TT-9CW TT-9CW2



MACHINE SPECIFICATIONS

	TT-9CW	TT-9CW2
Capacity (Depending on product)	30-90 pouches/min.	30-60 pouches/min.
Pouch Size	• (W) 80-150 mm • (L) 120 - 230 mm	• (W) 120-180 mm • (L) 150 - 300 mm
Pouch Material	Various laminated pouches	
Pouch Style	FlatStand-up	
Filling Product	Various pumps available depending on products	
Filling Range	Standard 50-350 cc	
Deaerating	Press type	
Sealing Method	2 step heat seal, 1 step cooling press	
Electric Power	7.5 kVA	
Air Consumption	0.5 MPa (72 psi), 600 Nl/min.	0.5 MPa (72 psi), 800 NI/min.
Machine Dimensions	2,197 (W) x 3,094 (L) x 1,873 (H) mm	2,715 (W) x 3,301 (L) x 1,923 (H) mm
Machine Weight	3,000 kg	3,500 kg

MACHINE DIMENSIONS

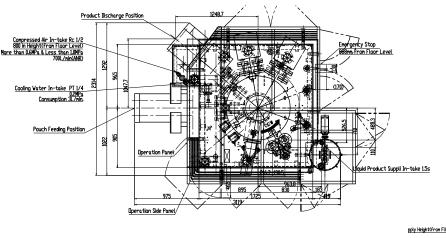

High speed pouch filler/sealer

Accessories

- Product discharge conveyor
- Vacuum pump
- Funnel
- · Product counter
- · Heater disconnection alarm
- · Pouch opening detection device

Options

- Date printer
- Stand-up pouch bottom opening device
- · Various filling devices
- Special liquid tanks
- Agitator
- · Level switch
- Compressor
- Tapping device
- Special pouch magazine
- Fill waiting operation

APPLICATIONS

- Retorted pouch foods
- Pre-cooked foods
- Frozen foods
- Sauces
- Juices
- Processed sea food
- · Liquid detergent
- Many more!

